

POLITECNICO DI MILANO



**POLITECNICO**  
**MILANO 1863**

SOFTWARE ENGINEERING 2 COURSE

**Travlendar +**

*di*

*Gianluigi Oliva, Marco Mussi e Lukasz Moskwa*

January 5, 2018

# Contents

<b>1</b>	<b>Introduction and Scope</b>	<b>3</b>
<b>2</b>	<b>Requirements and Functionalities</b>	<b>4</b>
<b>3</b>	<b>Frameworks</b>	<b>5</b>
<b>4</b>	<b>Structure of the code</b>	<b>8</b>
<b>5</b>	<b>Testing</b>	<b>15</b>
<b>6</b>	<b>Installation instructions</b>	<b>23</b>

# 1 Introduction and Scope

Travlendar+ allows to create a calendar which fits the meetings and other kind of commitments. The key feature of this application is to determine if the meeting location is reachable in the scheduled time and then provide a fast way to get to the destination, otherwise it notify the user that it is not possible by any mean to fulfill the request. Furthermore the application also arranges the schedule in a flexible way for some kind of events (like the lunch) and offers the possibility to slightly change its time. In the creation of the user's calendar it also takes into account the current weather condition to make smarter decisions. As example, if the user show interest in using bike or a bike sharing service, during a sunny day, the system will favor a suitable path.

This document have the scope o present all things implemented related to that described in the RASD and DD and will be underlined the functionalities and the requirements that are and aren't implemented with the related motivations.

In the following pages will be described the procedure that permit to install and start the whole platform showing all the external software and configuration files required to execute the system properly. Furthermore in order to easy the usage will be provided an URL through which is possible to use the platform without installing any software.

With the purpose to validate both the server side both the client side they will be written some tests with the aim to verify the correctness of the execution using dedicated tools.

## 2 Requirements and Functionalities

In this chapter we will talk about the Functional Requirements that were implemented and those that were not with a motivation for each one.

In particular we implemented the following functionalities:

- Register to Travlendar+
- Create a daily schedule
- Manage user's own data
- Retrieve information about the weather forecast
- Modify an already completed schedule for a certain day
- Modify user's preferred time for having a meal
- Receive information about the current journey

These were implemented in order to provide all the basic functionalities that allow an effective use of the platform.

On the other hand, we could not implement the following functionalities:

- Buy tickets and subscriptions
  - We have no access to the API of the ATM and Trenord for the purchase of tickets and subscriptions
- Reservation of car and mobile sharing services
  - We have no access to the API of the shared means of transport (like Enjoy, Mobike, OFO ect)

# 3 Frameworks

As explained previously in the DD, while realizing the application we used the following programming and markup languages and frameworks:

## Programming Languages

For the server side we used the following programming languages:

- **Java 8**
  - We decided to use Java 8 to deploy the main server of our application  
**PRO:** Ease the collaboration on the same code and it is portable. It also has a huge number of available libraries free to use  
**CON:** It's slow
- **Python**
  - We used python to develop a server with the only purpose to validate the interaction between the client and server side.  
**PRO:** Reliable and allows a fast implementation of the software required.  
**CON:** No perceivable cons
- **SQL**
  - We used SQL for the management of data  
**PRO:** It supports relational databases and work on all the main DBMS

For the client side we used the following programming and markup languages:

- **HTML 5**
  - Last version of the common used language to develop web sites  
**PRO:** Easy to use, supported by all the browsers
- **CSS 3**
  - Last version of the common used language to edit style of web pages  
**PRO:** Really awesome effects  
**CON:** Lack of variables easy to use

- **JavaScript**

- Common used language to perform dynamic actions on web pages
- PRO:** Lot of libraries and not so hard to implement
- CON:** There is no debugging in easy way. Sometimes workarounds are required in order to make an acceptable code

## Framework

For the server side we used the following libraries and frameworks:

- **Java:**

- JavaEE
- JUnit
- org.json
- google.gson
- org.PostgreSQL
- PowerMockito
- Mockito

- **Python:**

- colorama
- Flask
- json
- pprint

For the client side we used the following libraries and frameworks:

- **Template:** REGNA Template (Free Version)

- **Phonegap** and Cordova for cross-compiling

- **Javascript** Libraries:

- fullcalendar.js (from fullcalendar.io)
- jQuery
- Bootstrap
- maps.googleapis.com
- Moment

## Other software used

- Tomcat
- MySQL
- Postgress
- Flask
- Apache JMeter
- Heroku

The last one was used to deploy the application server to a remote host. Due to this, in order to use the platform, is enough to connect to a URL provided in the respective section of installation.

## Used API

- **Google API:** These are used to display and receive information about the path and everything concerning the journey.
- **APIXU API:** These are use in order to receive and display the data about the weather forecast in a particular day.
- **IMGUR API** These are use in order to save the picture of the user.

## 4 Structure of the code

As often said in the other documents, the system was parted in three layers: presentation, application and data layer. Each of these levels is executed on a separate machine/server in order to guarantee a three-tier architecture, as explained in the DD, increasing the overall security.

### Server Side

The Data layer is built with tables that are populated with the information of all the users and implemented with SQL language.

On the other hand, the Application layer contains all the business logic and functions and it was implemented in Java. That also allowed a logical partition of different modules:

- **DataHandlerDBMS:** This module takes care of the connection and communication with the DBMS, enabling the possibility of receiving query and DML commands.
- **UserManager:** This module handles all the data of a single user and functions like Login, Logout and information update. For the login and logout it also take advantage of the SecurityAuthenticator for handling the token that identifies the user.
- **ScheduleManager:** This module takes care of the user's schedule management by enabling the function of creating a new one, making sure it does not already exist, populate it with events of any kind, making sure there are no overlaps and using the best route for a journey. For the selection of the path we make use of ExternalRequestManager class which interfaces with an external API to get information about the route and the weather.
- **Servlet:** This module is responsible for the communication of the application layer with the presentation one by defining the endpoints on which the GET and POST will work, handling requests and returning the result of the application server for the requested function.
- **Data:** This module contains all the classes that represent the data stored in the DB in order to facilitate their use when required. Also within them, there are the methods that transform those data in JSON and then send them to various clients.



Example of code for database request:

```
public static ResultSet sendQuery(String query) {
    try {
        Statement stm = DBMS.createStatement();
        ResultSet res = stm.executeQuery(query);
        return res;
    } catch (SQLException e) {
        System.out.println("Error in sendQuery");
        e.printStackTrace();
    }
    return null;
}
```

Example of code for addEvent:

```
public static boolean addEvent(User user, String day, Event event, String
    origin) {
    String username = user.getUsername();
    ArrayList < TypeMeans > means = user.getMeansPref();
    Schedule schedule = getSchedule(username, day);
    Time t = null;
    TypeMeans meansUsed = null;
    int wheater = ExternalRequestManager.getWeatherForecast(origin, day);
    for (TypeMeans el: means) {
        HashMap < String, Integer > ris =
            ExternalRequestManager.getDistanceMatrixAPI(origin,
                event.getPosition(),
                el.getTypeAPI());
        if (ris != null) {
            Time temp = new Time((ris.get("duration") - 3600) * 1000);
            if (el == TypeMeans.bicycling && wheater == 1000) {
                if (t == null || temp.compareTo(t) < 0) {
                    t = temp;
                    meansUsed = el;
                }
            }
            if (el == TypeMeans.walking && ris.get("distance") <=
                user.getMaxWalk()) {
                if (t == null || temp.compareTo(t) < 0) {
                    t = temp;
                    meansUsed = el;
                }
            }
        }
        if (el == TypeMeans.driving) {
            if (t == null || temp.compareTo(t) < 0) {
                t = temp;
            }
        }
    }
}
```

```

        meansUsed = el;
    }
}
if (el.isTransit() &&
    user.getMaxHoursMeans().compareTo(event.getStart()) >= 0) {
    if (t == null || temp.compareTo(t) < 0) {
        t = temp;
        meansUsed = el;
    }
}
}
}
if (t != null && meansUsed != null) {
    int startJourney = (int)(event.getStart().getTime() - t.getTime() -
        3600000);
    if (startJourney < -3600000) {
        return false;
    }
    Journey j = new Journey(new Time(event.getStart().getTime() -
        t.getTime() - 3600000), t, meansUsed, event, origin);
    boolean notOverlaps = true;
    ArrayList < Journey > breakEx = schedule.getAndRemoveBreak();
    Time startj = j.getStart();
    Time endj = new Time(event.getStart().getTime() +
        event.getDuration().getTime() + 3600000);
    for (Journey el: schedule.getSchedule()) {
        Time startEl = el.getStart();
        Time endEl = new Time(
            el.getEvent().getStart().getTime() +
            el.getEvent().getStart().getTime() + 3600000);
        if ((startj.compareTo(startEl) > 0 && startj.compareTo(endEl) < 0)
            || (endj.compareTo(startEl) > 0 && endj.compareTo(endEl) < 0))
        {
            notOverlaps = false;
            break;
        }
    }
}
if (notOverlaps && canAddBreak(user, schedule)) {
    for (Journey el: breakEx) {
        deleteEvent(el.getEvent().getID());
    }
}
DataHandlerDBMS.executeDML("insert into event (ID, name, start,
    duration, type, position) values (" + event.stringValuesQuery() +
    ")");
DataHandlerDBMS.executeDML( "insert into journey (username, day,
    start, duration, path, EventID, position) values ('" + username +

```

```

        "',' + day + "','," + j.stringValuesQuery() + "));
    for (Journey el: breakEx) {
        Break br = user.getBreakFromName(el.getEvent().getName());
        if (br != null) {
            addBreak(br, user, day);
        }
    }
    return true;
} else {
    return false;
}
} else {
    return false;
}
}
}

```

## Client Side

The Presentation Layer instead is written mainly with Web based languages like HTML5, CSS3 and JavaScript. Then, in order to obtain a mobile version executable, the Web Application is parsed and compiled with Phonegap.

The website is parted as follows in order to cover all the functions required:

- **index.html:** This is the initial page with a welcome screen and a brief description of the application. From this page is actually possible to perform a Sign Up action to register a new user or a Sign In action to login with an existing user.
- **main.html:** This is the main page where a calendar with all the schedules can be seen. It is also possible to change the basic view of the calendar from day to month and create a new Schedule for a chosen day. Then, the user can also create a new Event filling a brief form.
- **profile.html:** In this page the user can actually see all the information about his/her profile and update them: it is possible to set a preferred range for a break during a day with a schedule, adding/removing means of transport from the preferred ones and change personal information like credit card number, driving license number and update the profile picture.
- **weather.html:** In this page a user can actually check the weather for a chosen day
- **ticket.html:** This page was realized only for the sake of completeness. As we can't realize a concrete communication with third part API for the purchase of tickets and subscription, there is only a layout left for future implementations.

About the code structure, the business logic of the client was completely implemented with JavaScript and some of its libraries. Some examples are provided as follows:

##### Example of code for basic client-server request:

```
var isPhoneGap = true; //changed on server side to false, true for mobile
var herokuURL = "";
if (isPhoneGap) {
    herokuURL = "http://travlendarmom.herokuapp.com";
}

$.ajax({
    dataType: "text",
    contentType: "text/plain; charset=utf-8",
    type: "POST",
    url: herokuURL + "/ExampleEndpoint",
    data: JSON.stringify(dataToSend),
    success: function(response) {
        //Function to execute in case of success
    }
});
```

This type of request is often performed in order to receive information from the server side. The response is then analyzed and parsed in order to show data to the user on the client side.

##### Working code for retrieving data and create a calendar:

```
$('#calendar').fullCalendar({
    header: {
        left: 'title',
        right: 'prev,next today month agendaDay'
    },
    dayClick: function(date, jsEvent, view, resourceObj) {
        $('#calendar').fullCalendar("gotoDate", date);
        $('#calendar').fullCalendar('changeView', 'agendaDay');
    },
    views: {
        listDay: {
            buttonText: 'Day'
        },
        listWeek: {
            buttonText: 'Week'
        }
    },
    eventClick: function(calEvent, jsEvent, view) {
```

```

var moment = $('#calendar').fullCalendar('getDate');
var time_no = String(moment.format()).split("T")[0].split("-");
var time_send = time_no[2] + "-" + time_no[1] + "-" + time_no[0];
var coseDaMandare = {
  "username": localStorage.getItem("my_username"),
  "token": localStorage.getItem("my_travlendar"),
  "day": time_send
};
$.ajax({
  dataType: "text",
  contentType: "text/plain; charset=utf-8",
  type: "POST",
  url: herokuURL + "/GetSchedule",
  data: JSON.stringify(coseDaMandare),
  success: function(response) {
    response = JSON.parse(response);
    var scorrimento = response["schedule"]["singleSchedule"];
    for (var i = 0; i < scorrimento.length; i++) {
      if (scorrimento[i]["event"]["ID"] == calEvent.id) {
        var coseDaMandare = {
          "origin": scorrimento[i]["position"],
          "destination": scorrimento[i]["event"]["position"],
          "mode": scorrimento[i]["means"]
        };
        $.ajax({
          dataType: "text",
          contentType: "text/plain; charset=utf-8",
          type: "POST",
          url: herokuURL + "/GetPath",
          data: JSON.stringify(coseDaMandare),
          success: function(response) {
            console.log(response);
          }
        });
      }
    }
  }
});
},
defaultView: 'agendaDay',
navLinks: true,
editable: false,
eventLimit: true,
events: returnArray,
eventColor: '#212170',

```

```
    eventTextColor: "white",  
    eventBorderColor: "blue"  
});
```

As it's possible to see by the code, in order to view the calendar the user is required to have an access token provided by the application server, then he need to previously login.

# 5 Testing

In order to proof the correctness of the most important parts of the code will be provided a complete test of all the main client and server parts of the code.

## Server Testing

On server side the Java EE code has been tested using the tools that Java provide with some additional libraries. In particular were used the JUnit libraries to test the part that works completely in the local system without using external resources like DBMS and network. To emulate the part which requires the interaction with external component was used a framework called Mockito to test all the part that regards the not static classes and methods of the code and another derivative tool called PowerMockito to emulate the execution and the response of the parts of the code which are the static. The test of the Java EE server is available with the source code of the whole Web Application in `Travlendar/src/test` folder in the Github repository.

Furthermore in order to measure the performance of the whole server side will be showed in the next pages some reports of the performance measurement made by Apache JMeter. All tests are executed using Apache JMeter version 3.3. In order to make the performance measurement test repeatable easily the target of the test provided in the folder `Travlendar/src/test/testJMeter` folder in the Github repository have as target the Heroku site. The performance tests must be executed in this order:

- First must be executed the login method with the parameters like in the `Login.jmx` file (username:admin and password:pass)
- After the execution of the login performance test in the response section a token will be returned
- Returned token must be inserted in the proper space in "Body Data" field (HTTP Request section) of the others performance tests in order to authenticate the user properly on the system, otherwise the user result out properly logged in

All the results of the tested method are showed in the next pages.

## 5 Testing

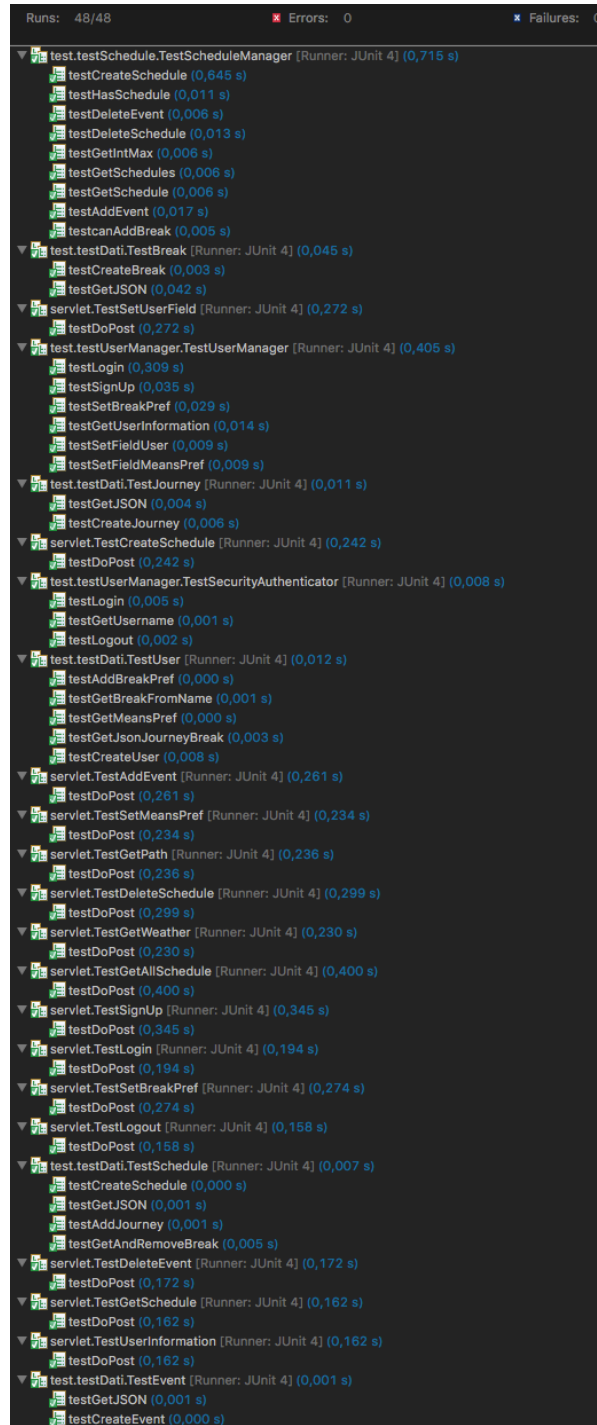


Figure 5.1: The result of the JUnit test on Eclipse



	Sampler result	Request	Response data
Thread Name	MainThread 1-1		
Sample Start	2018-01-04 17:21:39 CET		
Load time	323		
Connect Time	209		
Latency	321		
Size in bytes	289		
Sent bytes	253		
Headers size in bytes	194		
Body size in bytes	95		
Sample Count	1		
Error Count	0		
Response code	200		

Figure 5.2: The performance results (in millisecond) of the Login servlet on Heroku application server

	Sampler result	Request	Response data
POST http://travlendarmom.herokuapp.com/Login			
POST data:			
{			
"username":"admin",			
"password":"pass"			
}			
[no cookies]			
Request Headers:			
Connection: keep-alive			
Content-Type: application/x-www-form-urlencoded			
Content-Length: 47			
Host: travlendarmom.herokuapp.com			
User-Agent: Apache-HttpClient/4.5.3 (Java/1.8.0_121)			

Figure 5.3: The request send to server for the Login servlet

	Sampler result	Request	Response data
{ "status": "OK", "token": "VMsY6WaOmCPI7G5uHepz", "name": "Gianluigi", "surname": "Oliva" }			

Figure 5.4: The response of the server for the Login servlet

Sampler result		Request	Response data
Thread Name	MainThread 1-1		
Sample Start	2018-01-04 17:29:10 CET		
Load time	602		
Connect Time	493		
Latency	601		
Size in bytes	577		
Sent bytes	277		
Headers size in bytes	194		
Body size in bytes	383		
Sample Count	1		
Error Count	0		
Response code	200		

Figure 5.5: The performance results (in millisecond) of the UserInformation servlet on Heroku application server

Sampler result		Request	Response data
POST http://travlendarmom.herokuapp.com/UserInformation			
POST data:			
{			
"username": "admin",			
"token": "VMsY6WaOmCPI7G5uHepz"			
}			
[no cookies]			
Request Headers:			
Connection: keep-alive			
Content-Type: application/x-www-form-urlencoded			
Content-Length: 61			
Host: travlendarmom.herokuapp.com			
User-Agent: Apache-HttpClient/4.5.3 (Java/1.8.0_121)			

Figure 5.6: The request sent to server for the UserInformation servlet

Sampler result		Request	Response data
{ "status":"OK", "user":{"username":"admin","name":"Gianluigi","surname":"Oliva","mail":"gianluigi.oliva95@gmail.com","phone":"3270026837","drivingLicense":"drive123","creditCard":"altro123","maxWalk":10000,"maxHourMeans":"23:00:00","breakPref":[{"name":"Pranzo","start":"13:30:00","end":"14:00:00","duration":"00:15:00"}], "meansPref":[{"type":"bus"}, {"type":"driving"}] }			

Figure 5.7: The response of the server for the UserInformation servlet

	Sampler result	Request	Response data
Thread Name	MainThread 1-1		
Sample Start	2018-01-04 17:33:33 CET		
Load time	531		
Connect Time	277		
Latency	530		
Size in bytes	1177		
Sent bytes	275		
Headers size in bytes	194		
Body size in bytes	983		
Sample Count	1		
Error Count	0		
Response code	200		

Figure 5.8: The performance results (in millisecond) of the GetAllSchedule servlet on Heroku application server

	Sampler result	Request	Response data
POST http://travlendarmom.herokuapp.com/GetAllSchedule			
POST data:			
{			
"username": "admin",			
"token": "VMsY6WaOmCPI7GSuHepz"			
}			
[no cookies]			
Request Headers:			
Connection: keep-alive			
Content-Type: application/x-www-form-urlencoded			
Content-Length: 60			
Host: travlendarmom.herokuapp.com			
User-Agent: Apache-HttpClient/4.5.3 (Java/1.8.0_121)			

Figure 5.9: The request sent to server for the GetAllSchedule servlet

	Sampler result	Request	Response data
{ "status": "OK", "schedule": [{"day": "03-01-2018", "events": [{"ID": 57, "name": "Altro", "start": "08:00:00", "duration": "02:00:00"}, {"ID": 58, "name": "Pranzo", "start": "13:30:00", "duration": "00:15:00"}, {"ID": 42, "name": "Gita", "start": "15:00:00", "duration": "01:00:00"}]}, {"day": "04-01-2018", "events": [{"ID": 45, "name": "Prova", "start": "08:00:00", "duration": "01:00:00"}, {"ID": 46, "name": "Pranzo", "start": "13:00:00", "duration": "00:30:00"}]}, {"day": "02-01-2018", "events": [{"ID": 50, "name": "Pranzo", "start": "13:30:00", "duration": "00:30:00"}, {"ID": 48, "name": "Prova 12", "start": "19:00:00", "duration": "01:00:00"}]}, {"day": "05-01-2018", "events": [{"ID": 51, "name": "Pranzo", "start": "13:30:00", "duration": "00:15:00"}]}, {"day": "07-01-2018", "events": [{"ID": 53, "name": "Consegna Ing Software", "start": "09:00:00", "duration": "02:00:00"}, {"ID": 54, "name": "Pranzo", "start": "13:30:00", "duration": "00:15:00"}]}, {"day": "06-01-2018", "events": [{"ID": 59, "name": "Pranzo", "start": "13:30:00", "duration": "00:15:00"}]}]}			

Figure 5.10: The response of the server for the GetAllSchedule servlet

## 5 Testing

	Sampler result	Request	Response data
Thread Name	MainThread 1-1		
Sample Start	2018-01-04 17:42:15 CET		
Load time	337		
Connect Time	229		
Latency	335		
Size in bytes	727		
Sent bytes	298		
Headers size in bytes	194		
Body size in bytes	533		
Sample Count	1		
Error Count	0		
Response code	200		

Figure 5.11: The performance results (in millisecond) of the GetSchedule servlet on Heroku application server

	Sampler result	Request	Response data
POST http://travlendarmom.herokuapp.com/GetSchedule			
POST data:			
{			
"username": "admin",			
"token" : "VMsY6WaOmCPI7G5uHepz",			
"day" : "07-01-2018"			
}			
[no cookies]			
Request Headers:			
Connection: keep-alive			
Content-Type: application/x-www-form-urlencoded			
Content-Length: 86			
Host: travlendarmom.herokuapp.com			
User-Agent: Apache-HttpClient/4.5.3 (Java/1.8.0_121)			

Figure 5.12: The request send to server for the GetSchedule servlet

	Sampler result	Request	Response data
{ "status": "OK", "schedule": { "username": "admin", "day": "07-01-2018", "singleSchedule": [ { "start": "08:32:01", "duration": "00:27:59", "means": "driving", "event": { "ID": "53", "name": "Consegna Ing Software", "start": "09:00:00", "duration": "02:00:00", "eventType": "MEETING", "position": "Milano+via+golgi+20", "position": "Desio+via+vercelli+14", "start": "13:30:00", "duration": "00:00:00", "means": "walking", "event": { "ID": "54", "name": "Pranzo", "start": "13:30:00", "duration": "00:15:00", "eventType": "BREAK", "position": "Milan", "position": "Milan" } } ] } }			

Figure 5.13: The response of the server for the GetSchedule servlet

## Client Testing

With the aim to provide a test also at the client side of the application was created a purpose specific Python server to test the response of the client at some predetermined situation that the server provide statically. The test of the client will be provided in the source code in Travlendar/src/test/testingServer folder and an example of the response is showed in the following pages.

The Python server require to be executed with Python3 to support all its features, it also require two additional modules: Colorama and Flask those are available to download directly from command line by using python commands (that are different between the various OS). In order to run the test in the same folder there are a "templates" folder which contains a specifically purposed client copy that must be at the same level of the Puthon server file (server.py).

For all the endpoint there was a code that emulate the real server response, this allows to test the client side independently from the real application and web servers. The server shows in the command line that run it the result of the different requests of the client and shows clearly, also using colors (red for errors and yellow for correct request), if the calls is successfull or not.

The following code show the example of the Login endpoint of the testing server.

```
# Test del metodo del login
@app.route('/Login', methods=['POST'])
def login():
    if request.method == 'POST':
        data_loaded = json.loads((request.data).decode("utf-8"))
        if data_loaded['username'] == tempUsername and
           data_loaded['password'] == tempPassword:
            print(Fore.WHITE + Back.YELLOW + "### REQUEST made on /Login")
            pprint(data_loaded)
            print(Back.YELLOW + "=====")
            print(Fore.WHITE + Back.YELLOW + "### RESPONSE is:")
            my_response = {
                "status" : "OK",
                "token" : tempToken
            }
            pprint(my_response)
            print(Style.RESET_ALL)
            return json.dumps(my_response)
        else:
            print(Back.RED+ Fore.WHITE + "Error!!")
            pprint(data_loaded)
            my_response = {
```

```

        "status" : "KO",
        "token" : "Qualcosa e' andato male..."
    }
    pprint(my_response)
    return json.dumps(my_response)

```

In the following pictures will be showed a success and a fail of the request from the client.

```

### REQUEST made on /Login
{'password': 'pwd', 'username': 'admin'}
=====
### RESPONSE is:
{'status': 'OK', 'token': 'qwertyasdfgh12345'}

```

Figure 5.14: The correct request from the client

```

Error!!
{'password': 'errPass', 'username': 'errorUser'}
{'status': 'KO', 'token': 'Qualcosa è andato male...'}
127.0.0.1 -- [05/Jan/2018 00:25:58] "POST /Login HTTP/1.1" 200 -

```

Figure 5.15: The wrong request from the client

## 6 Installation instructions

To use the application you can proceed in two different ways: you can access the site or you can install all the components in local. In the first case, you just have to access the url

**`http://travlendarmom.herokuapp.com.`**

Once the page is loaded, you have to log in clicking on "Get Started". After that, you can "Sign Up" or you can access directly using the test credentials

```
#Test credentials
username = "admin"
password = "pass"
```

In the second case, you have to download the following files:

- JavaEE source files from the repository <https://github.com/Gigioliva/OlivaMussiMoskwa>
- Dump file for database Dump.sql in the same repository
- Eclipse for JavaEE <http://www.eclipse.org/downloads/eclipse-packages/>
- MySQL <https://dev.mysql.com/downloads/mysql/>
- MySQL Workbench <https://dev.mysql.com/downloads/workbench/>
- Tomcat 8.5.24 <https://tomcat.apache.org/download-80.cgi>

Once you have downloaded all the files, proceed with the MySQL installation wizard. As for the required parameters, please choose the following:

```
port: "3306"
user: "root"
password: "prova"
```

As the MySQL installation is completed, we suggest installing MySQL Workbench in order to manage the database using a GUI.

Now you have to carry out the dump of the data structure by CLI

(<https://dev.mysql.com/doc/refman/5.7/en/mysqldump.html>) or by Workbench (Server → Data Import → Import from Self-Contained File → Dump Structure Only → Start Import).

Database initialization completed, install the server.

- Unzip the Tomcat archive
- Open Eclipse and from "File" select "Import"
- Select "Existing Maven Projects", then the Travlendar folder downloaded from the repository
- Once the project has been imported, click on it with the right mouse button and then press "Properties"
- Then select "Targeted Runtimes" and if there is no server, press "New ..." and follow the Tomcat configuration wizard.
- Finally click on the project with the right button → Run As → Run On Server → select the server created → Finish