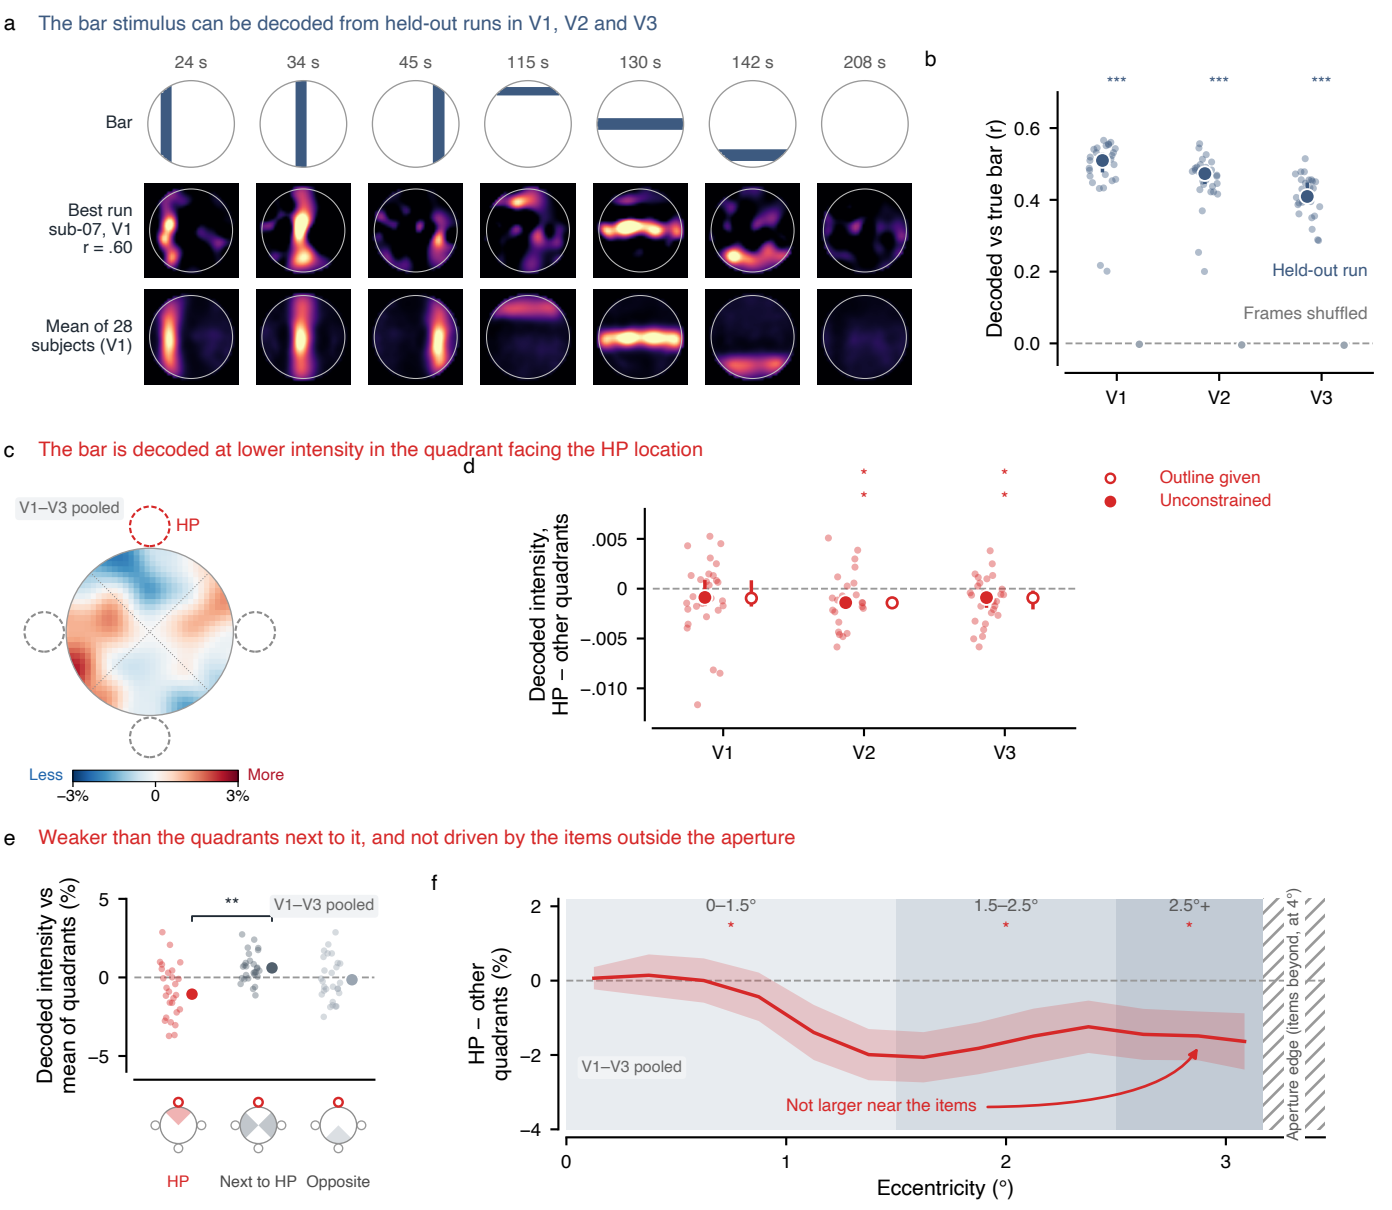

a
The bar stimulus can be decoded from held-out runs in V1, V2 and V3
24 s
34 s
45 s
115 s
130 s
142 s
208 s
Bar
Best run
sub-07, V1
r = .60
Mean of 28
subjects (V1)
b
Decoded vs true bar (r)
0.6
0.4
0.2
0.0
***
***
***
Held-out run
Frames shuffled
V1
V2
V3
c
The bar is decoded at lower intensity in the quadrant facing the HP location
V1–V3 pooled
HP
Less
More
–3%
0
3%
d
Outline given
Unconstrained
Decoded intensity,
HP – other quadrants
.005
0
–.005
–.010
V1
V2
V3
e
Weaker than the quadrants next to it, and not driven by the items outside the aperture
Decoded intensity vs
mean of quadrants (%)
5
0
–5
**
V1–V3 pooled
HP
Next to HP
Opposite
f
HP – other
quadrants (%)
2
0
–2
–4
0–1.5°
1.5–2.5°
2.5°+
V1–V3 pooled
Not larger near the items
Aperture edge (items beyond, at 4°)
0
1
2
3
Eccentricity (°)