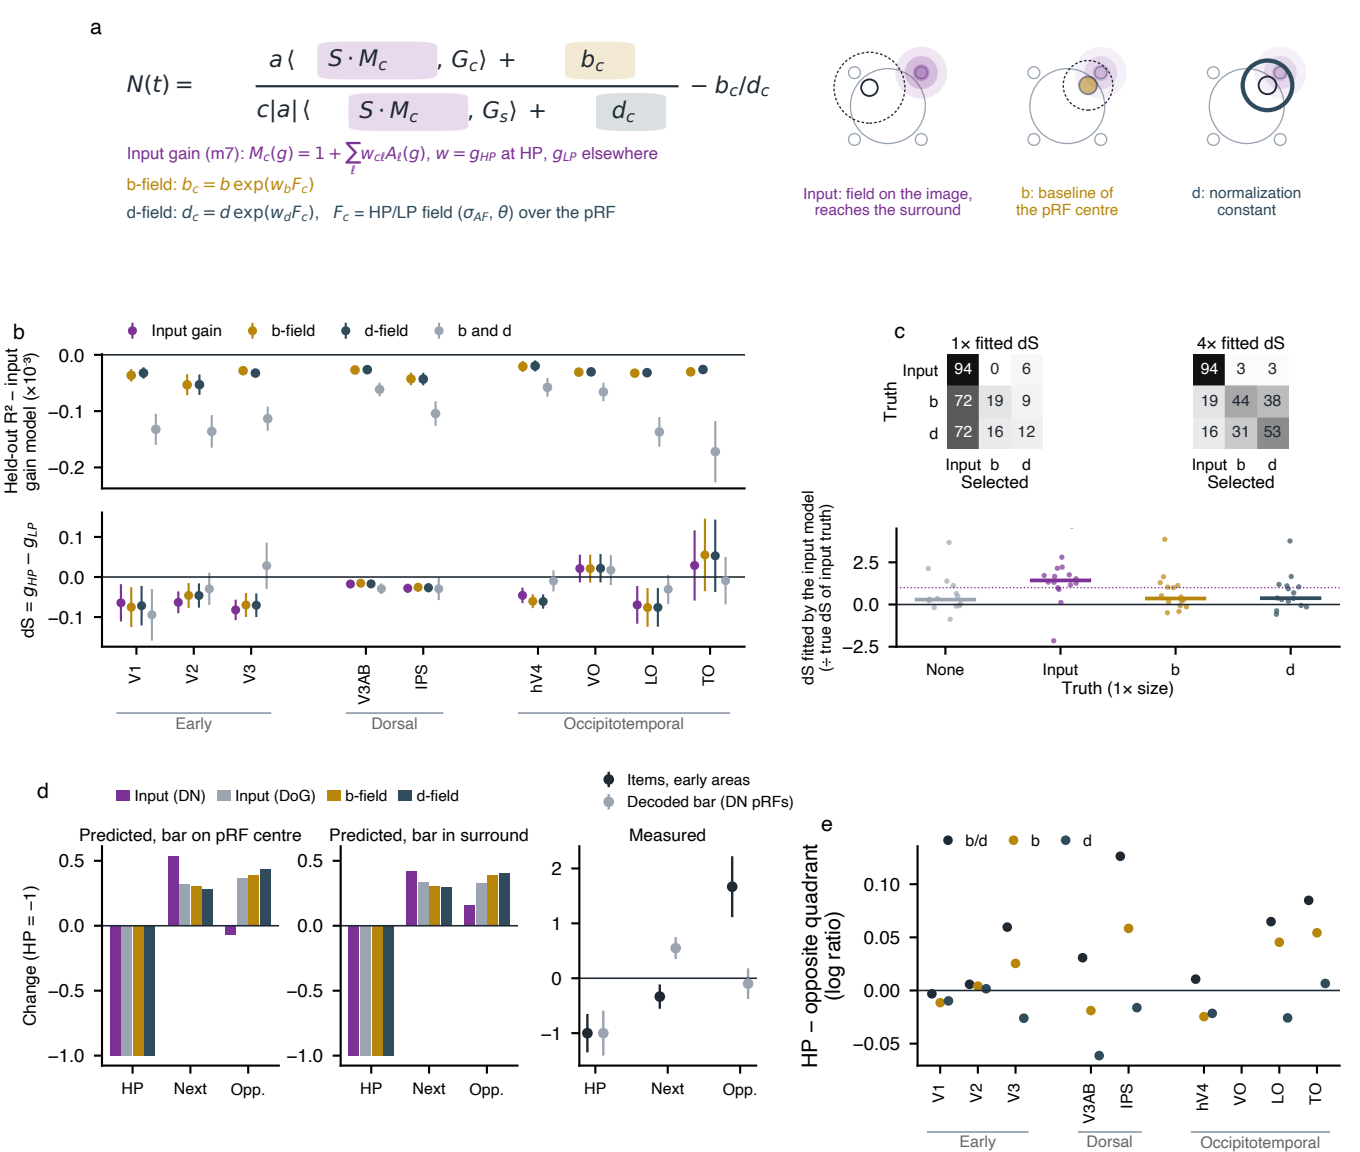

a
$N(t) = \frac{a\langle S \cdot M_c, G_c\rangle + b_c}{c|a|\langle S \cdot M_c, G_s\rangle + d_c} - b_c/d_c$
Input gain (m7): $M_c(g) = 1 + \sum_t w_{ct} A_t(g)$, $w = g_{HP}$ at HP, g_{LP} elsewhere
b-field: $b_c = b\exp(w_b F_c)$
d-field: $d_c = d\exp(w_d F_c)$, F_c = HP/LP field (σ_{AF}, θ) over the pRF
Input: field on the image, reaches the surround
b: baseline of the pRF centre
d: normalization constant
b
Input gain
b-field
d-field
b and d
Held-out R² – input gain model (×10³)
0.0
−0.1
−0.2
dS = $g_{HP} - g_{LP}$
0.1
0.0
−0.1
V1
V2
V3
V3AB
IPS
hV4
VO
LO
TO
Early
Dorsal
Occipitotemporal
c
1× fitted dS
Truth
Input 94 0 6
b 72 19 9
d 72 16 12
Input b d
Selected
4× fitted dS
94 3 3
19 44 38
16 31 53
Input b d
Selected
dS fitted by the input model (÷ true dS of input truth)
2.5
0.0
−2.5
None
Input
b
d
Truth (1× size)
d
Input (DN)
Input (DoG)
b-field
d-field
Predicted, bar on pRF centre
Predicted, bar in surround
Change (HP = −1)
0.5
0.0
−0.5
−1.0
HP
Next
Opp.
Items, early areas
Decoded bar (DN pRFs)
Measured
2
1
0
−1
e
b/d
b
d
HP – opposite quadrant (log ratio)
0.10
0.05
0.00
−0.05