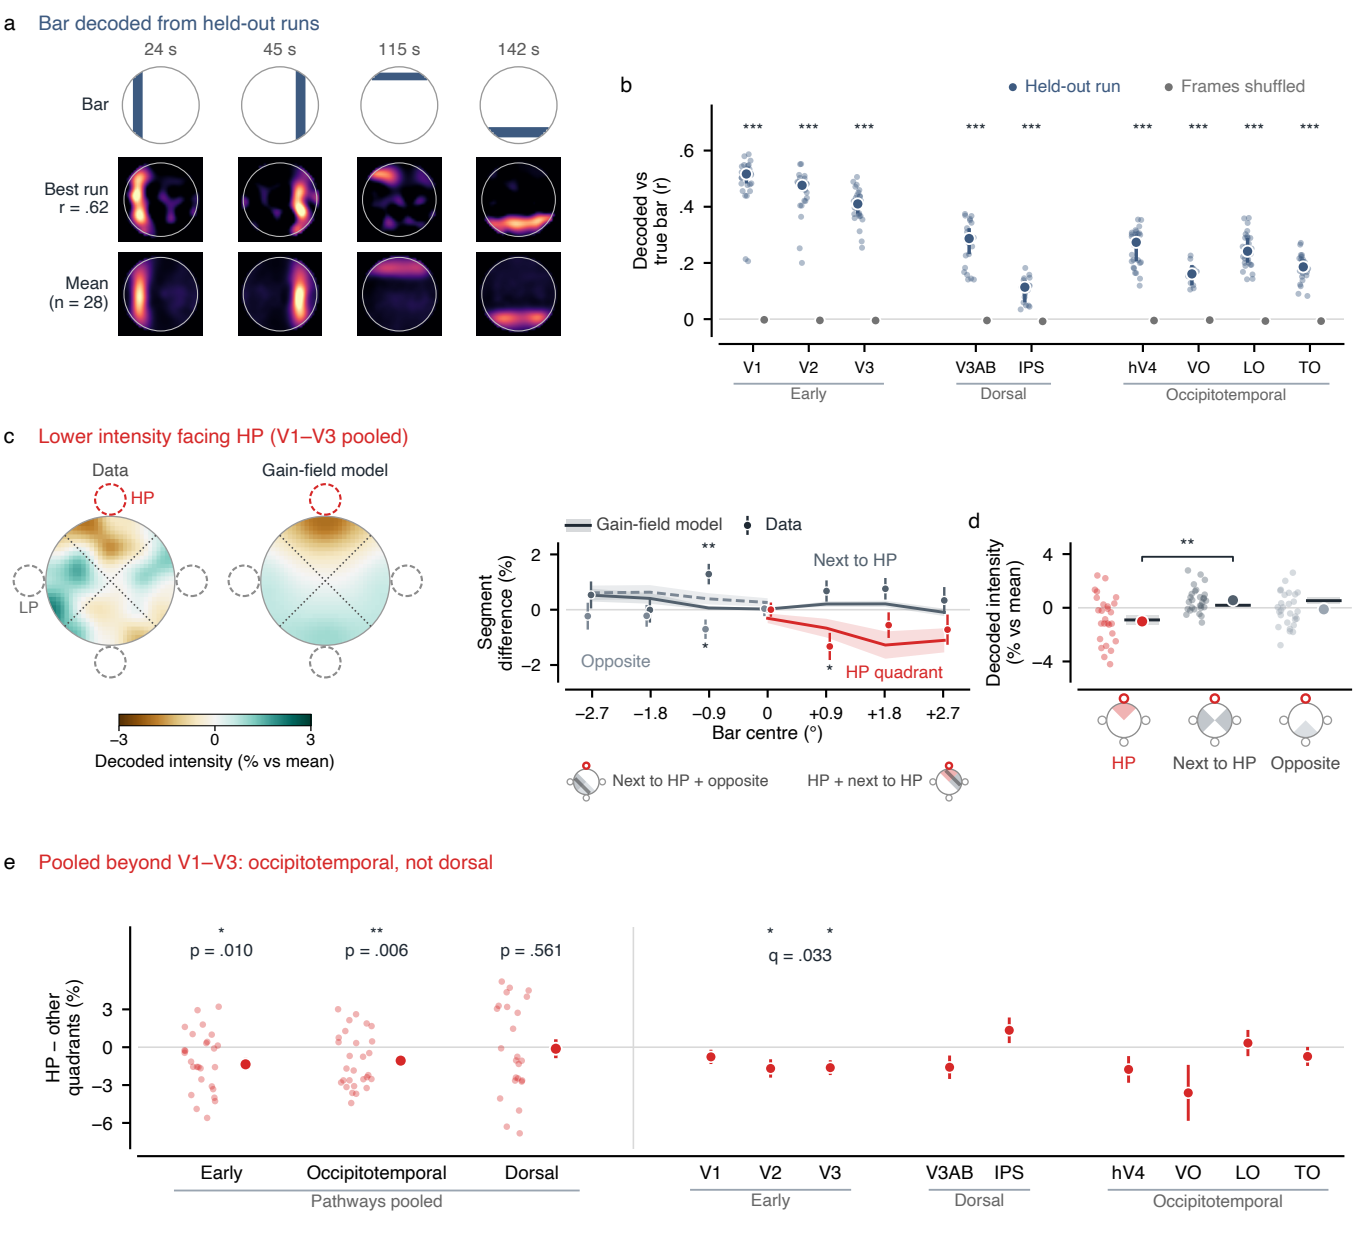

a
Bar decoded from held-out runs
24 s
45 s
115 s
142 s
Bar
Best run
r = .62
Mean
(n = 28)
b
Held-out run
Frames shuffled
Decoded vs
true bar (r)
.6
.4
.2
0
***
V1
V2
V3
V3AB
IPS
hV4
VO
LO
TO
Early
Dorsal
Occipitotemporal
c
Lower intensity facing HP (V1–V3 pooled)
Data
Gain-field model
HP
LP
−3
0
3
Decoded intensity (% vs mean)
Gain-field model
Data
Segment
difference (%)
2
0
−2
**
*
Next to HP
Opposite
HP quadrant
−2.7
−1.8
−0.9
0
+0.9
+1.8
+2.7
Bar centre (°)
Next to HP + opposite
HP + next to HP
d
Decoded intensity
(% vs mean)
4
0
−4
**
HP
Next to HP
Opposite
e
Pooled beyond V1–V3: occipitotemporal, not dorsal
HP − other
quadrants (%)
3
0
−3
−6
*
p = .010
**
p = .006
p = .561
*
*
q = .033
Early
Occipitotemporal
Dorsal
Pathways pooled
V1
V2
V3
Early
V3AB
IPS
Dorsal
hV4
VO
LO
TO
Occipitotemporal