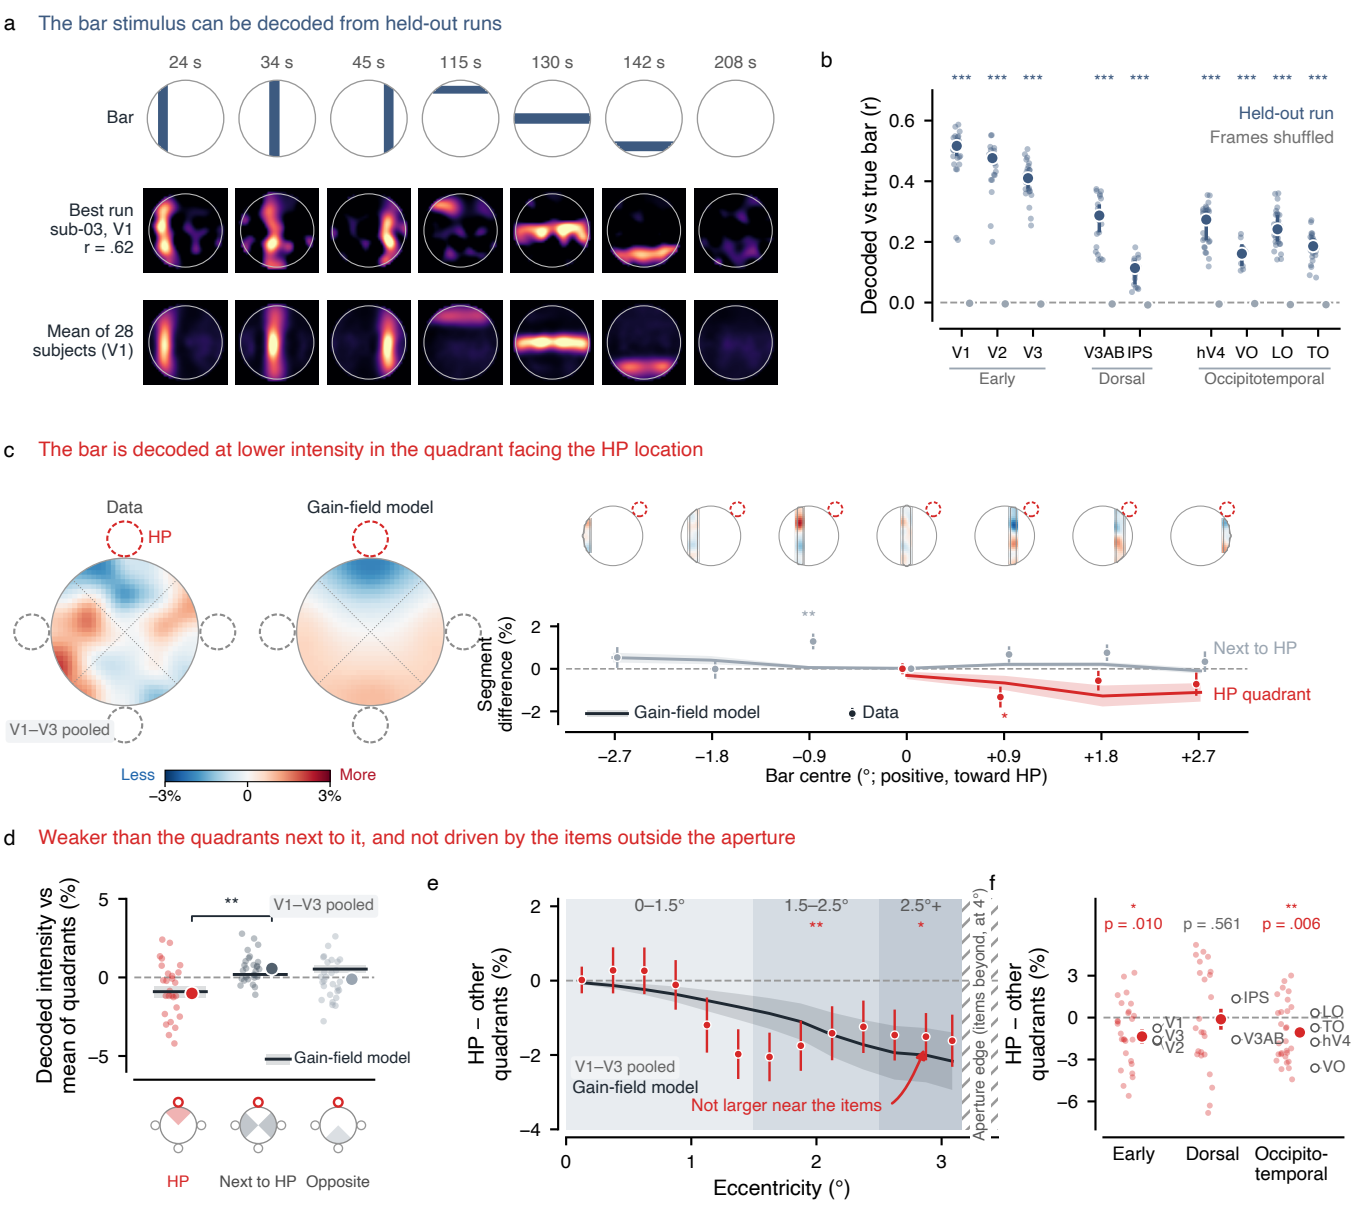

a
The bar stimulus can be decoded from held-out runs
24 s
34 s
45 s
115 s
130 s
142 s
208 s
Bar
Best run
sub-03, V1
r = .62
Mean of 28
subjects (V1)
b
Held-out run
Frames shuffled
Decoded vs true bar (r)
0.6
0.4
0.2
0.0
V1
V2
V3
V3AB
IPS
hV4
VO
LO
TO
Early
Dorsal
Occipitotemporal
c
The bar is decoded at lower intensity in the quadrant facing the HP location
Data
Gain-field model
HP
V1–V3 pooled
Less
More
−3%
0
3%
Segment difference (%)
Next to HP
HP quadrant
Gain-field model
Data
−2.7
−1.8
−0.9
0
+0.9
+1.8
+2.7
Bar centre (°; positive, toward HP)
d
Weaker than the quadrants next to it, and not driven by the items outside the aperture
Decoded intensity vs mean of quadrants (%)
V1–V3 pooled
Gain-field model
HP
Next to HP
Opposite
e
HP − other quadrants (%)
0–1.5°
1.5–2.5°
2.5°+
V1–V3 pooled
Gain-field model
Not larger near the items
Aperture edge (items beyond, at 4°)
Eccentricity (°)
f
HP − other quadrants (%)
p = .010
p = .561
p = .006
V1
V2
V3
IPS
V3AB
LO
TO
hV4
VO
Early
Dorsal
Occipito-temporal