

Voxel traces — all subjects

Per-voxel BOLD time courses, time-locked to bar-pass-near-RF.

Subjects requested: 6

ROIs: ['V3AB']

AF folders (search order): ['af_prf_joint_dynamic_v3_dog_with_target_sharedSigma', 'af_prf_joint_dynamic_v3_dog_with_target_sharedSigma']

AF tags (search order): ['dog-dyn-v3-target-sharedSigma', 'dog-dyn-v3-target', 'dog-dyn-v3']

PRF mean-fit folder: prf model4

Filters:

- mean $R^2 > 0.6$

- PRF center $> 0.8^\circ$ from each ring position

- PRF center inside bar aperture

- PRF eccentricity $> 1.0^\circ$

Voxel selection: top 8 per (sub, ROI) by $\Delta R^2(\text{AF} - \text{no-AF})$ on HP-close runs.

Layered overlay (--by-direction ON):

- thick obs = aggregate over towards+away

- thin solid (lower alpha) = TOWARDS HP

- thin dashed (lower alpha) = AWAY from HP


Line semantics per category (HP-close/orth/far):

- thick coloured = observed BOLD (aggregate), shaded = $\pm$ SEM

- thin solid coloured = AF model prediction

- thin dashed coloured = no-AF model (DoG + flexible HRF)

sub-03 ROI=V3AB AF model: DoGDynamicAttentionFieldPRF2DWithHRF_v3 (bar-pass-locked, all 4 sweeps + by-direction overlay)

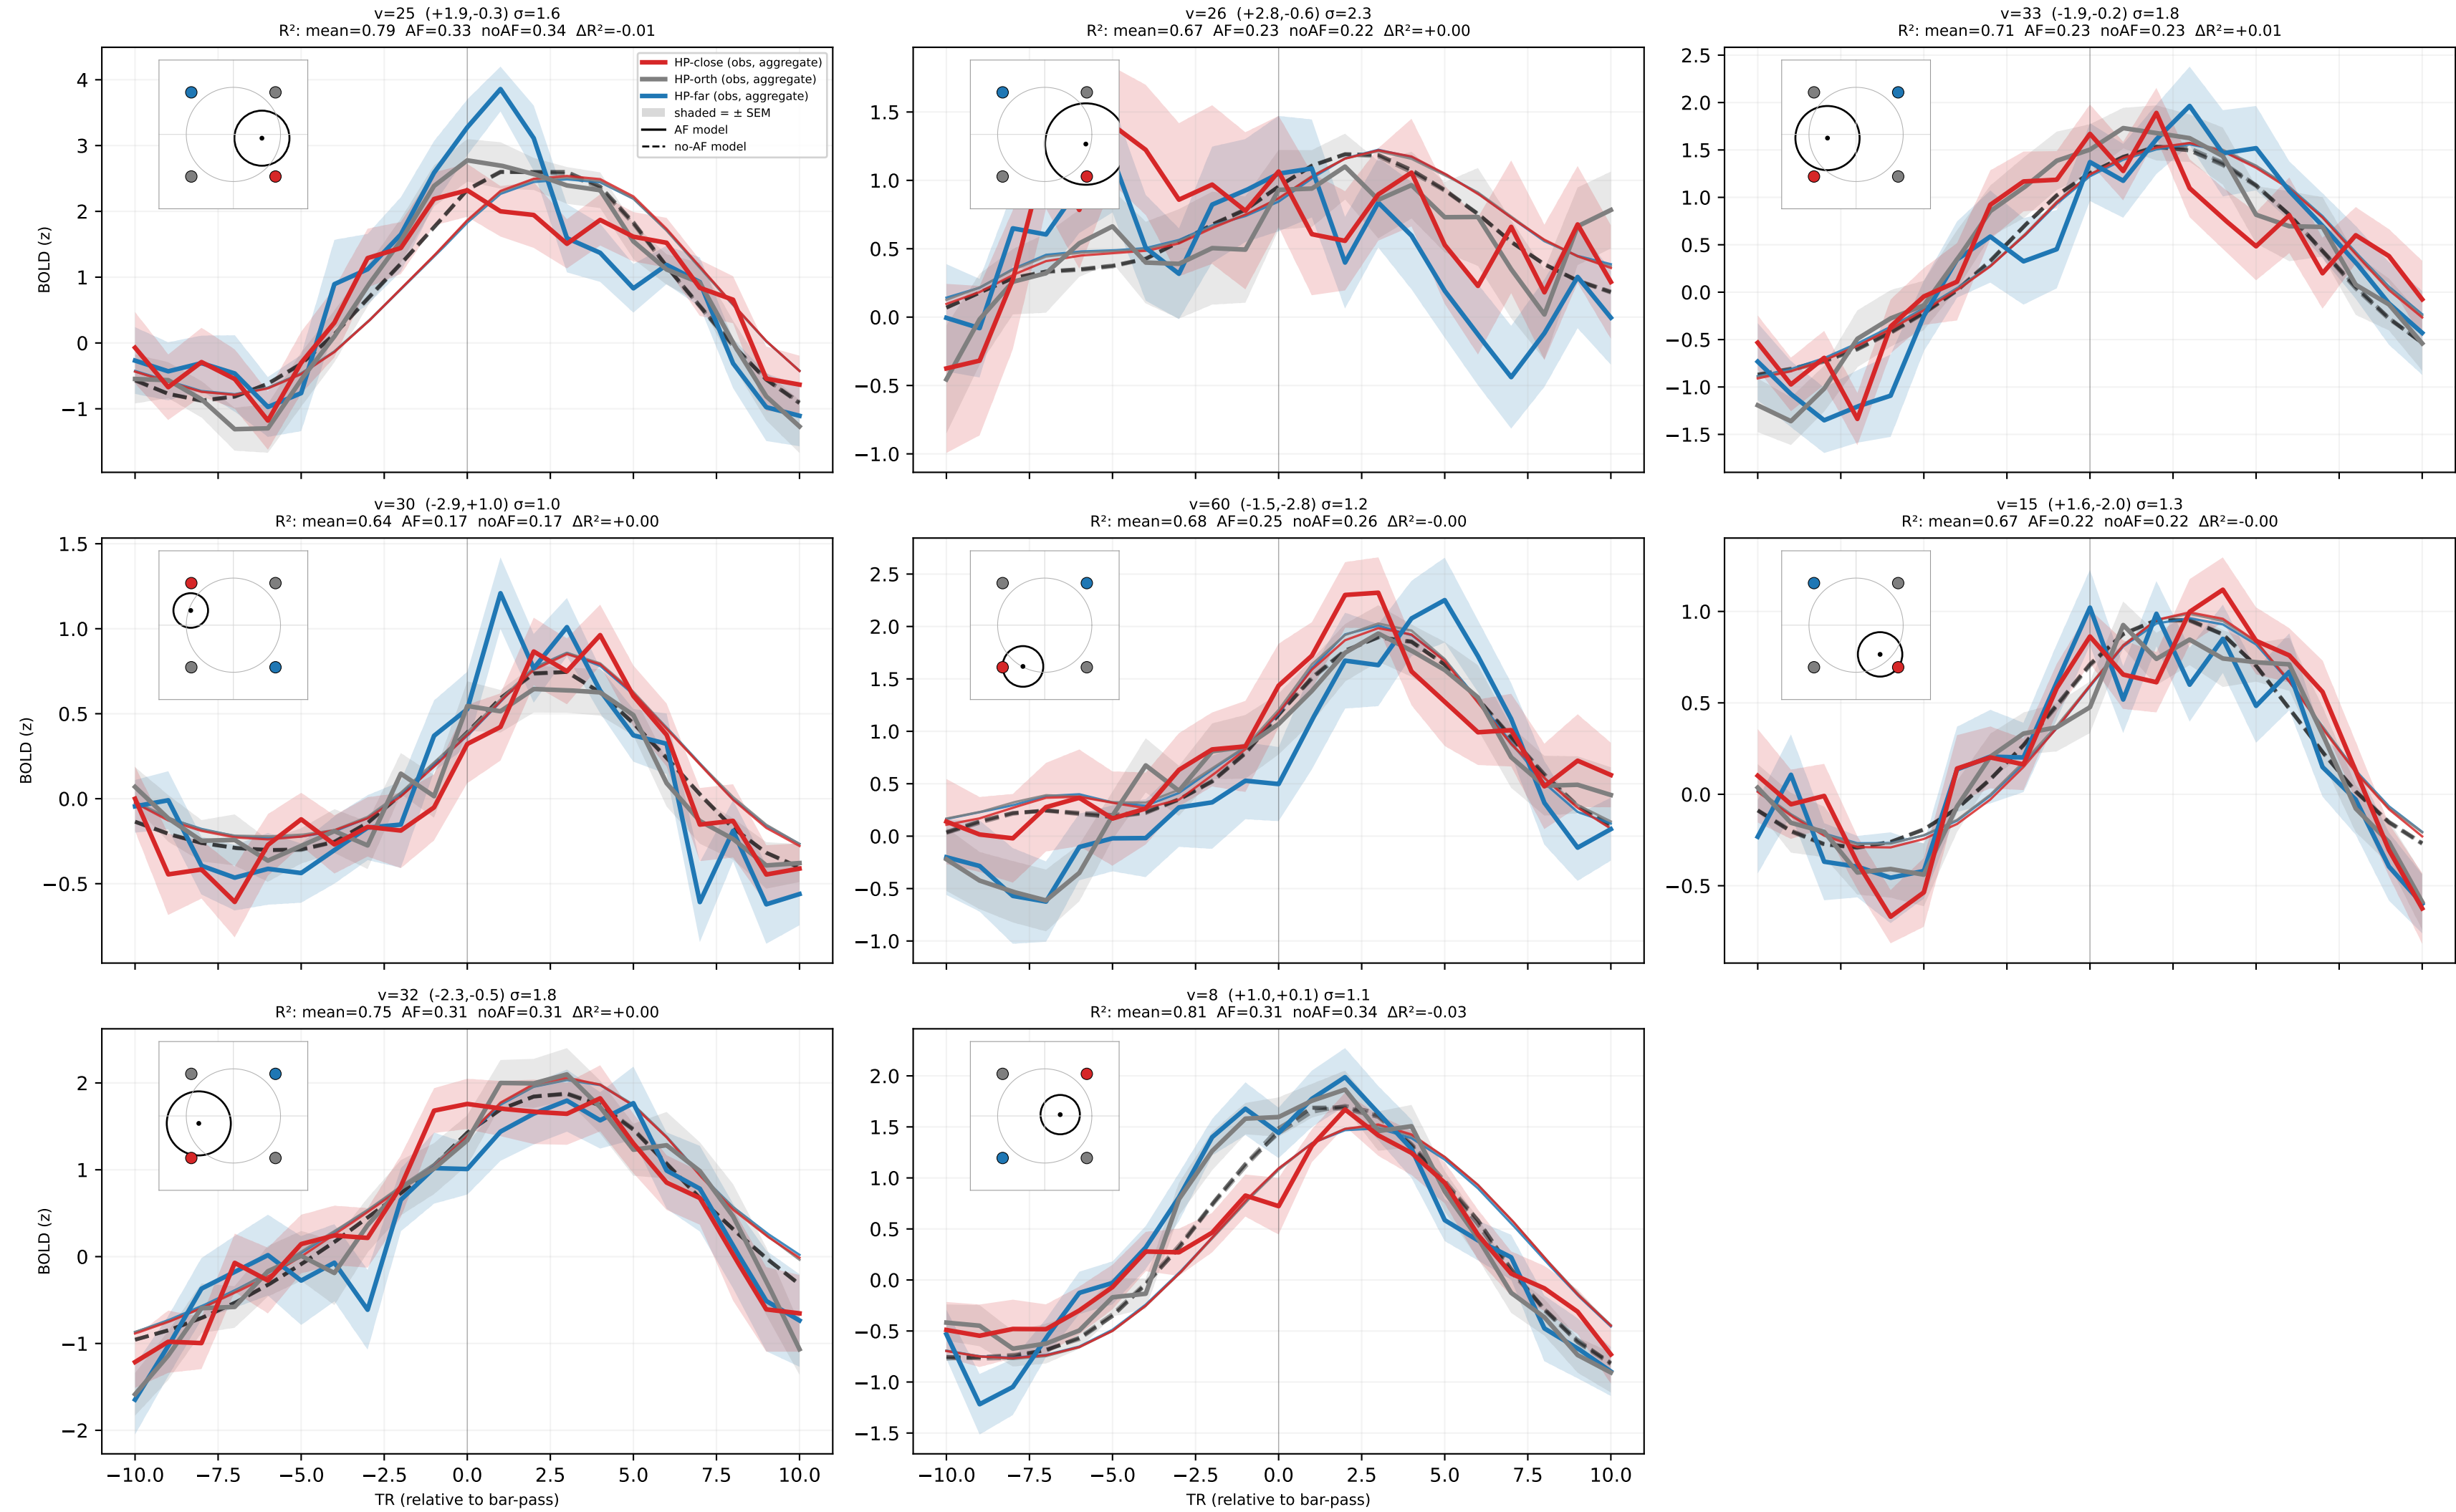

sub-28 ROI=V3AB AF model: DoGDynamicAttentionFieldPRF2DWithHRF_v3 (bar-pass-locked, all 4 sweeps + by-direction overlay)

