

Voxel traces — all subjects

Per-voxel BOLD time courses, time-locked to bar-pass-near-RF.

Subjects requested: 1

ROIs: ['V3AB']

AF folders (search order): ['af_prf_joint_dynamic_v3_dog_with_target_sharedSigma', 'af_prf_joint_dynamic_v3_dog_with_target_sharedSigma']

AF tags (search order): ['dog-dyn-v3-target-sharedSigma', 'dog-dyn-v3-target', 'dog-dyn-v3']

PRF mean-fit folder: prf model4

Filters:

- mean $R^2 > 0.6$

- PRF center $> 0.8^\circ$ from each ring position

- PRF center inside bar aperture

- PRF eccentricity $> 1.5^\circ$

Voxel selection: top 4 per (sub, ROI) by $\Delta R^2(\text{AF} - \text{no-AF})$ on HP-close runs.

Layered overlay (--by-direction ON):

- thick obs = aggregate over towards+away

- thin solid (lower alpha) = TOWARDS HP

- thin dashed (lower alpha) = AWAY from HP

Line semantics per category (HP-close/orth/far):


- thick coloured = observed BOLD (aggregate), shaded = $\pm$ SEM

- thin solid coloured = AF model prediction


- thin dashed coloured = no-AF model (DoG + flexible HRF)

sub-03 ROI=V3AB AF model: DoGDynamicAttentionFieldPRF2DWithHRF_v3 (bar-pass-locked, all 4 sweeps + by-direction overlay)


$v=12$ (+1.9,-0.3) $\sigma=1.6$
 R^2 : mean=0.79 AF=0.33 noAF=0.34 $\Delta R^2=-0.01$

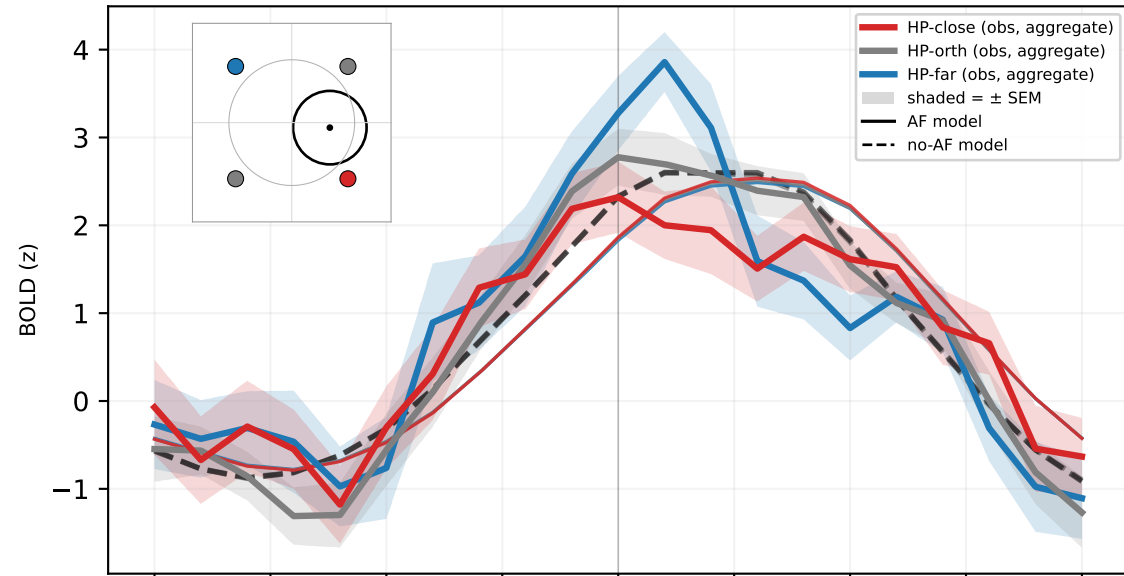

$v=13$ (+2.8,-0.6) $\sigma=2.3$
 R^2 : mean=0.67 AF=0.23 noAF=0.22 $\Delta R^2=+0.00$

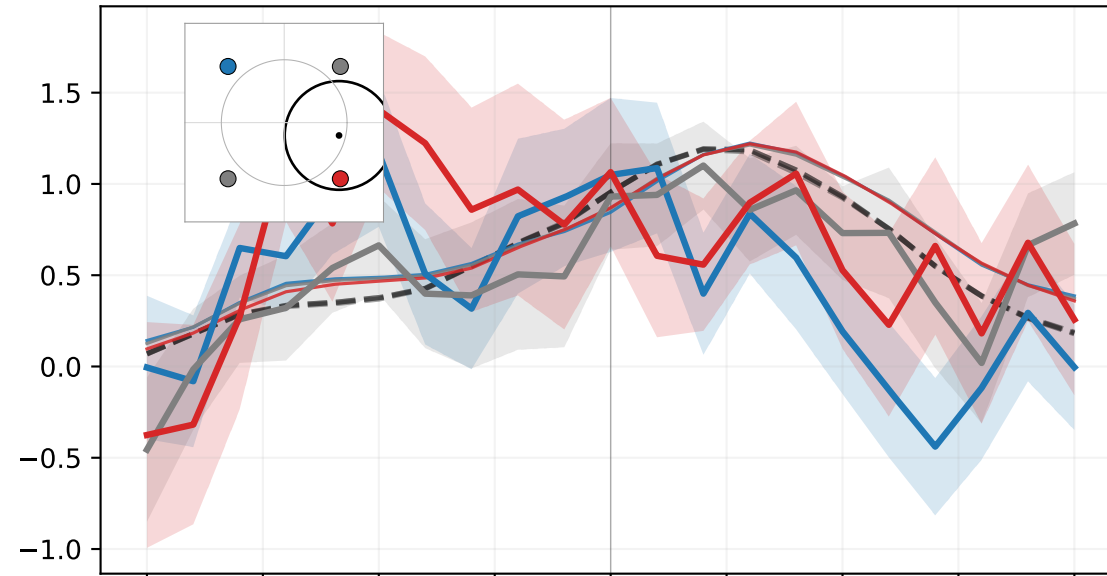

$v=20$ (-1.9,-0.2) $\sigma=1.8$
 R^2 : mean=0.71 AF=0.23 noAF=0.23 $\Delta R^2=+0.01$

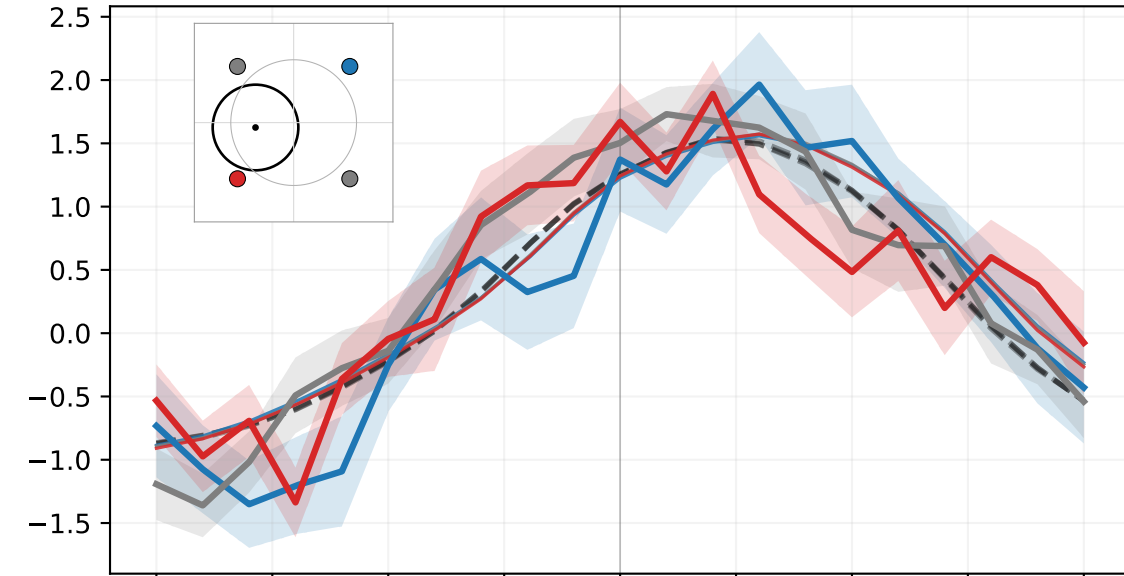

$v=17$ (-2.9,+1.0) $\sigma=1.0$
 R^2 : mean=0.64 AF=0.17 noAF=0.17 $\Delta R^2=+0.00$

