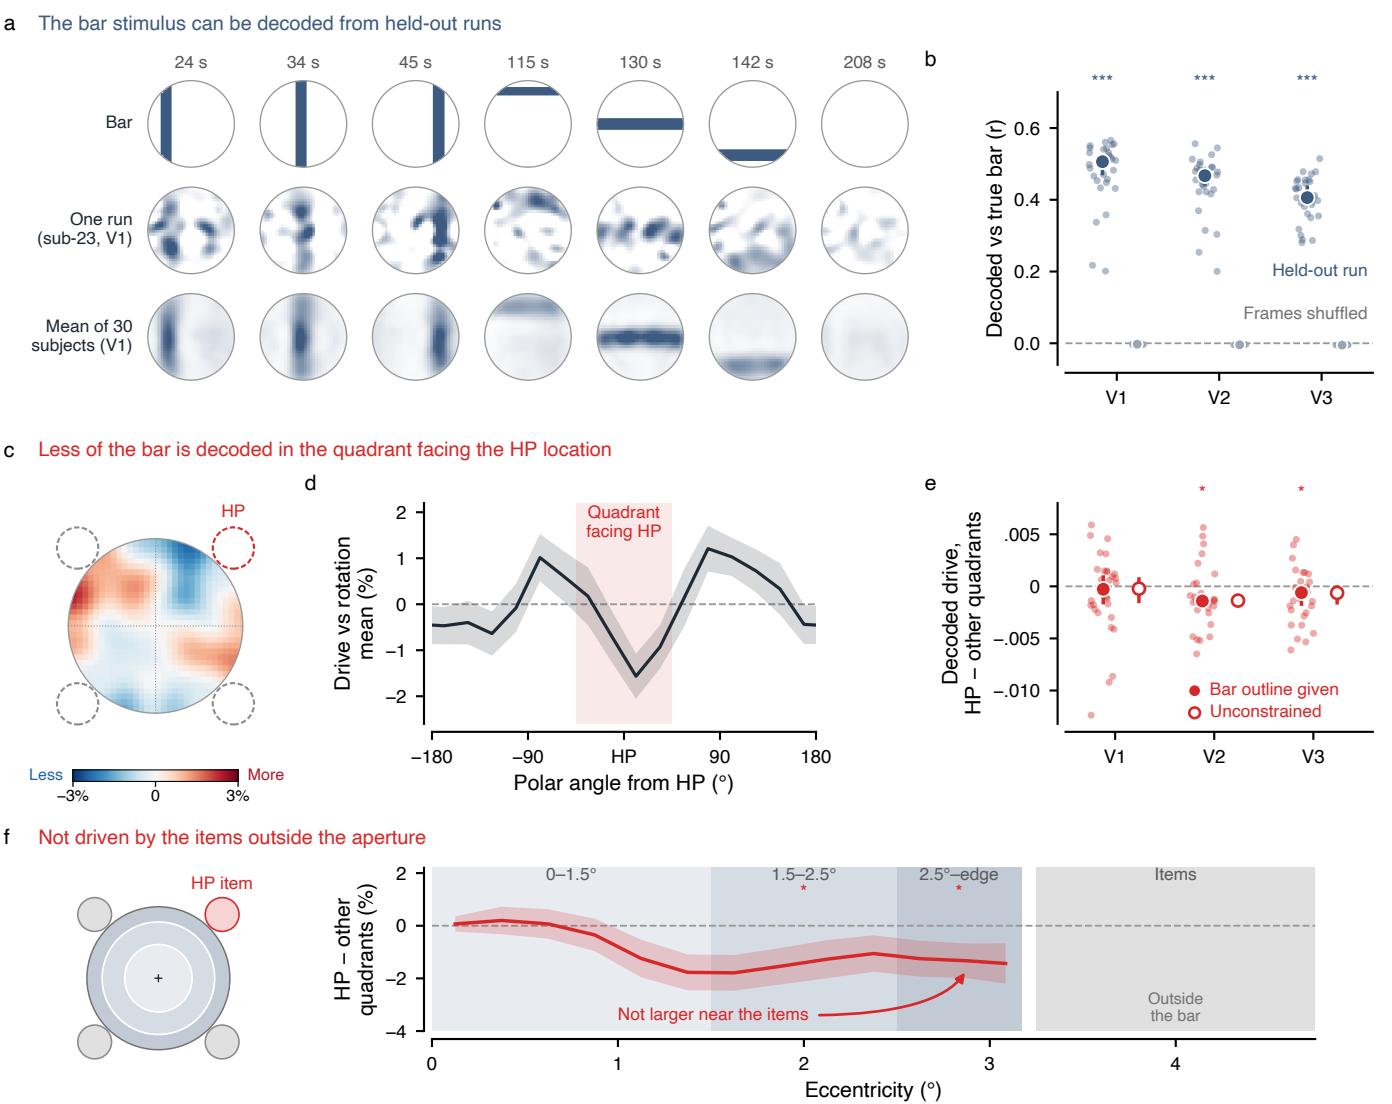

a
The bar stimulus can be decoded from held-out runs
24 s
34 s
45 s
115 s
130 s
142 s
208 s
Bar
One run (sub-23, V1)
Mean of 30 subjects (V1)
b
Decoded vs true bar (r)
0.6
0.4
0.2
0.0
***
***
***
Held-out run
Frames shuffled
V1
V2
V3
c
Less of the bar is decoded in the quadrant facing the HP location
HP
Less
More
−3%
0
3%
d
Drive vs rotation mean (%)
2
1
0
−1
−2
Quadrant facing HP
−180
−90
HP
90
180
Polar angle from HP (°)
e
Decoded drive, HP − other quadrants
.005
0
−.005
−.010
*
*
Bar outline given
Unconstrained
V1
V2
V3
f
Not driven by the items outside the aperture
HP item
HP − other quadrants (%)
2
0
−2
−4
0–1.5°
1.5–2.5°
2.5°–edge
*
*
Items
Outside the bar
Not larger near the items
0
1
2
3
4
Eccentricity (°)