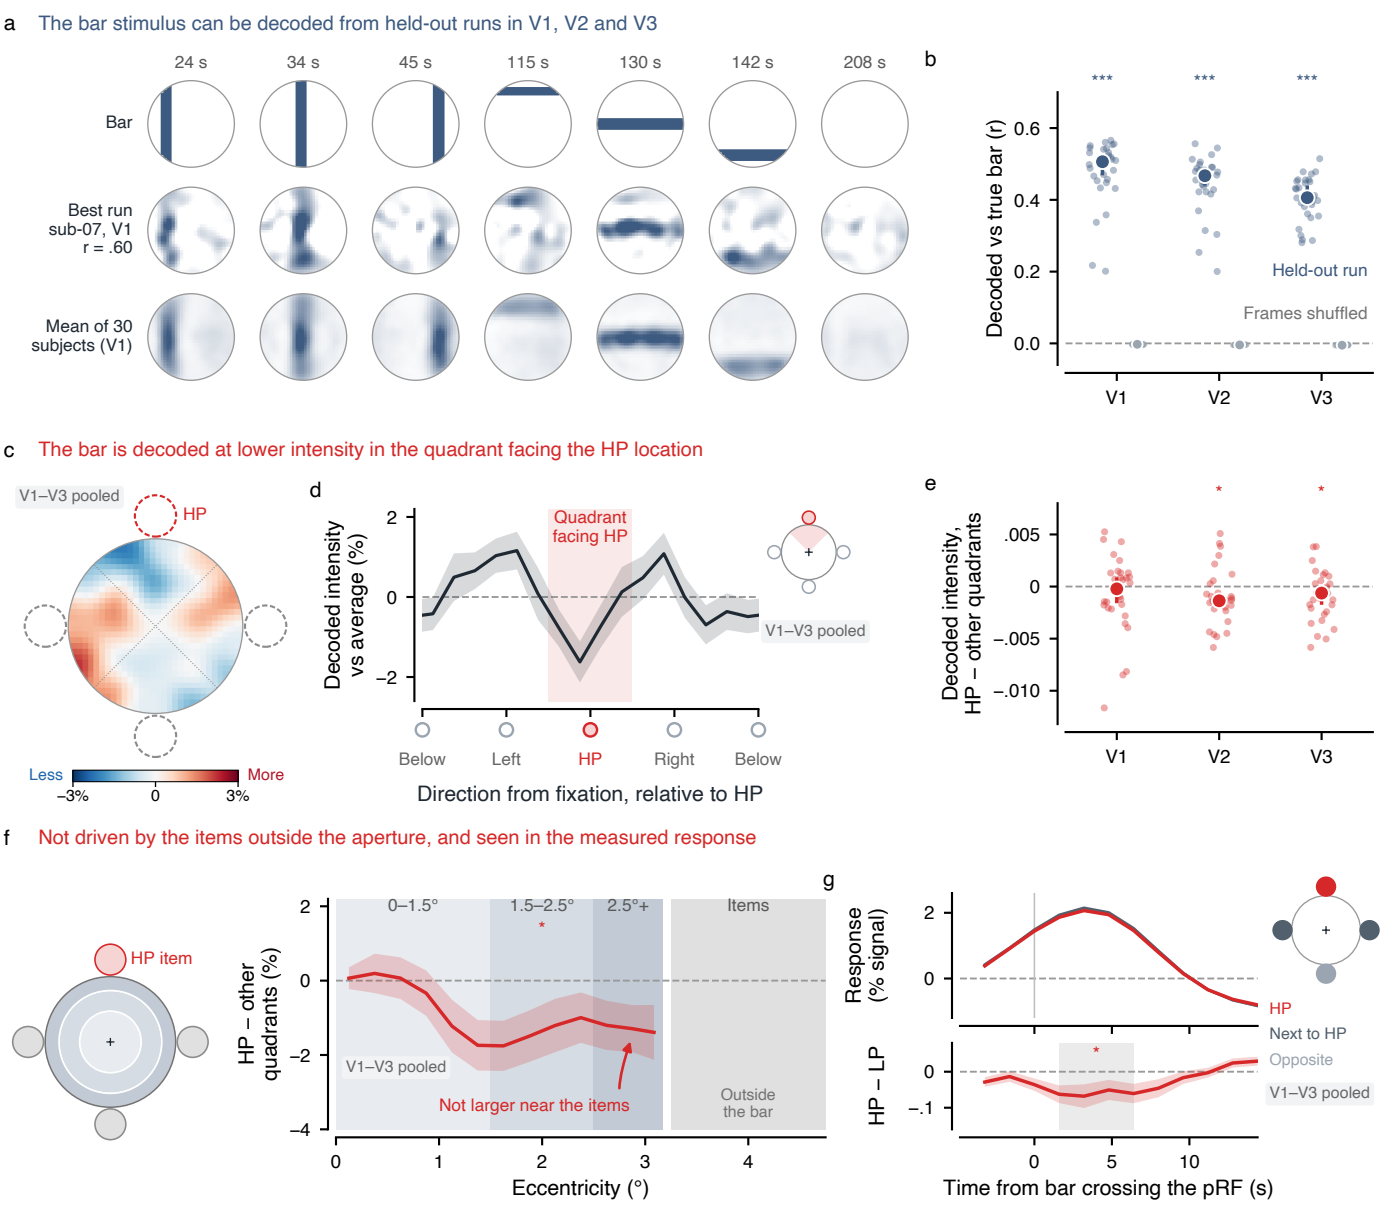

a
The bar stimulus can be decoded from held-out runs in V1, V2 and V3
24 s
34 s
45 s
115 s
130 s
142 s
208 s
Bar
Best run sub-07, V1 r = .60
Mean of 30 subjects (V1)
b
Decoded vs true bar (r)
0.6
0.4
0.2
0.0
***
***
***
Held-out run
Frames shuffled
V1
V2
V3
c
The bar is decoded at lower intensity in the quadrant facing the HP location
V1–V3 pooled
HP
Less
More
–3%
0
3%
d
Decoded intensity vs average (%)
2
0
–2
Quadrant facing HP
V1–V3 pooled
Below
Left
HP
Right
Below
Direction from fixation, relative to HP
e
Decoded intensity, HP – other quadrants
.005
0
–.005
–.010
*
*
V1
V2
V3
f
Not driven by the items outside the aperture, and seen in the measured response
HP item
HP – other quadrants (%)
2
0
–2
–4
0–1.5°
1.5–2.5°
2.5°+
Items
*
V1–V3 pooled
Not larger near the items
Outside the bar
0
1
2
3
4
Eccentricity (°)
g
Response (% signal)
2
0
HP
Next to HP
Opposite
V1–V3 pooled
HP – LP
0
–.1
*
0
5
10
Time from bar crossing the pRF (s)