

Computational Science: Movement of Ants

Georgios Methenitis



UNIVERSITY OF AMSTERDAM

October 22, 2013

Overview

- 1 Introduction
- 2 Approach
- 3 Results
- 4 Demo
- 5 Future Work



- Ants are social insects of the family Formicidae.
- Big ants' average speed is 300 meters per hour. (Human 18 m/h).
- Foraging ants travel distances of up to 200 meters from their nest.
- Ants communicate with each other using **pheromones**, sounds, and touch.

Approach to the problem

- Grid 2D space, 500×500 !
- Nest, Food, points in 2D space.
- Obstacles
- Two kinds of pheromone
- Home, food pheromone
- Ants independent agents
- Random ant movement only to neighbor cells
- ϵ -greedy approach
- Diffusion, evaporation

How the simulation works:

- Initially all ants located at their nest
- Their hunger level is $h = 1.0$, $h \in [0.0, 1.0]$
- $h = 1.0$, means they are starving
- They start a random walk
- They are dropping home pheromone as they are located in their nest:

$$ph_home_t^{i,j} = max_ph_home, \text{ if } i, j = nest \quad (1)$$

- When they move they take with them the pheromone:

$$ph_home_t^{i,j} = \max_{-1 \leq x, y \leq 1} [ph_home_{t-1}^{i+x, j+y}] - \beta, \quad x, y \in \mathbb{R} \quad (2)$$

- instead:

$$ph_home_t^{i,j} = ph_home_{t-1}^{i,j} - \beta \quad (3)$$

- When food is located in the same cell as an ant is:

$$ph_food_t^{i,j} = max_ph_food, \text{ if } i,j = food \quad (4)$$

- Ants leave trails as they move out from the food source, with the same way they do for home. But now they are dropping food pheromone.
- When the ants have $h < hunger_threshold$, 0.3 is used. They want to go back at their nest.
- When the ants have $h \geq hunger_threshold$. They want to go find food again.

Epsilon-greedy action selection:

- The best action is selected for a proportion $1 - \epsilon$ of the trials, and another action is randomly selected for a proportion ϵ .
- A typical parameter that is used is: $\epsilon = 0.2$, but this can vary.
- Depending where they want to go, they follow with ϵ -greedy the pheromone.

Diffusion:

$$ph_t^{i,j} = \max[ph_{t-1}^{i,j}, r_d * \max_{-1 \leq x, y \leq 1} [ph_{t-1}^{i+x, j+y}], x, y \in \mathbb{R} \quad (5)$$


$r_d \in [0.0, 1.0]$, diffusion rate.

Evaporation:


$$ph_t^{i,j} = r_e * ph_{t-1}^{i,j} \quad (6)$$

$r_e \in [0.0, 1.0]$, evaporation rate.


Map:

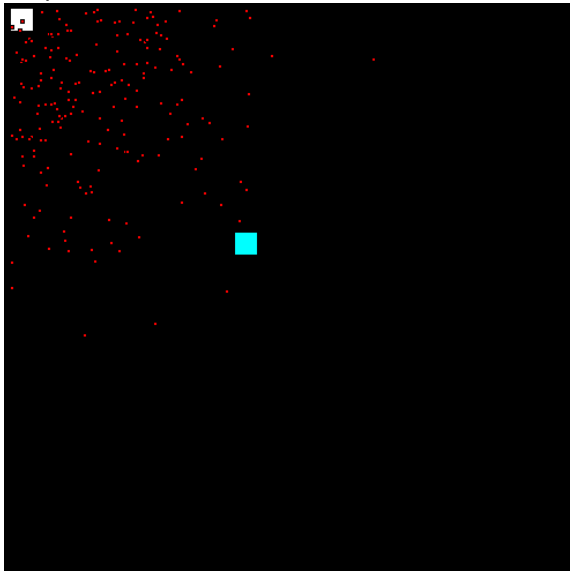


Gui:

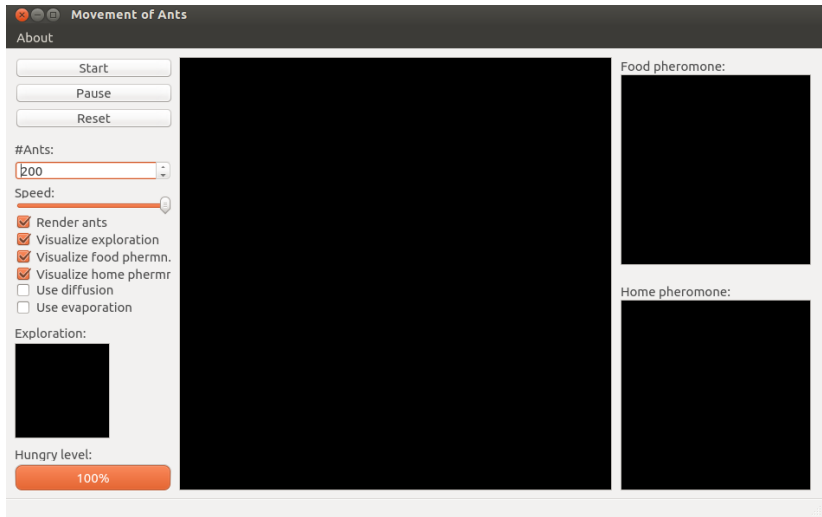

Experiment(No obstacle)

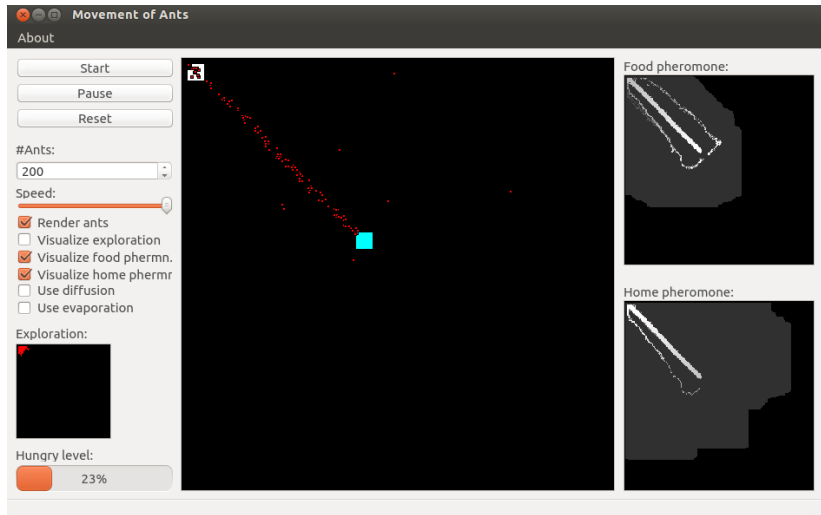

Experiment(With obstacle)

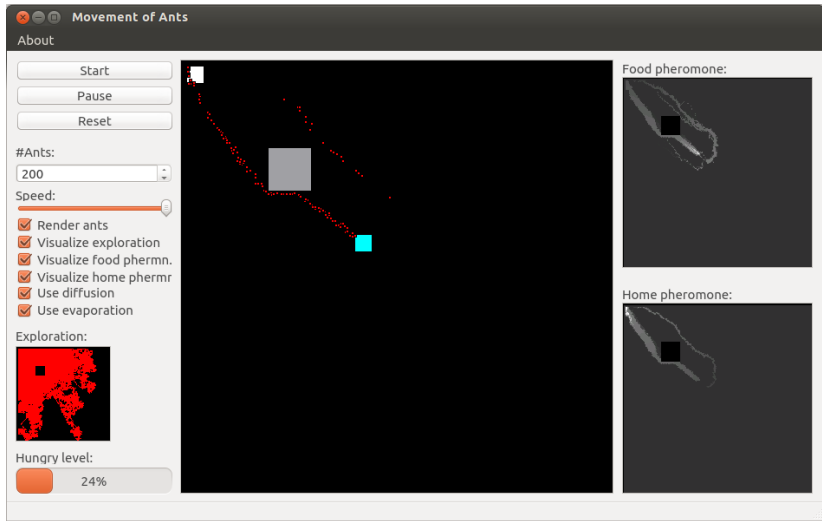

Demo

Future Work:

- Include also death, born rates.
- Make the simulation more realistic, constants, distances, etc..

References



Paulo E. Merloti

Simulation of Artificial Ants Behavior in a Digital Environment.

Department of Computer Science Graduate Seminar in Artificial Intelligence Evolutionary and Adaptive Computation



Liviu A. Panait and Sean Luke

Ant Foraging Revisited

George Mason University, Fairfax, VA 22030 lpanait@cs.gmu.edu, sean@cs.gmu.edu



How Fast Can an Ant Run?



Wiki: Ant



Ant colony optimization algorithms

The End