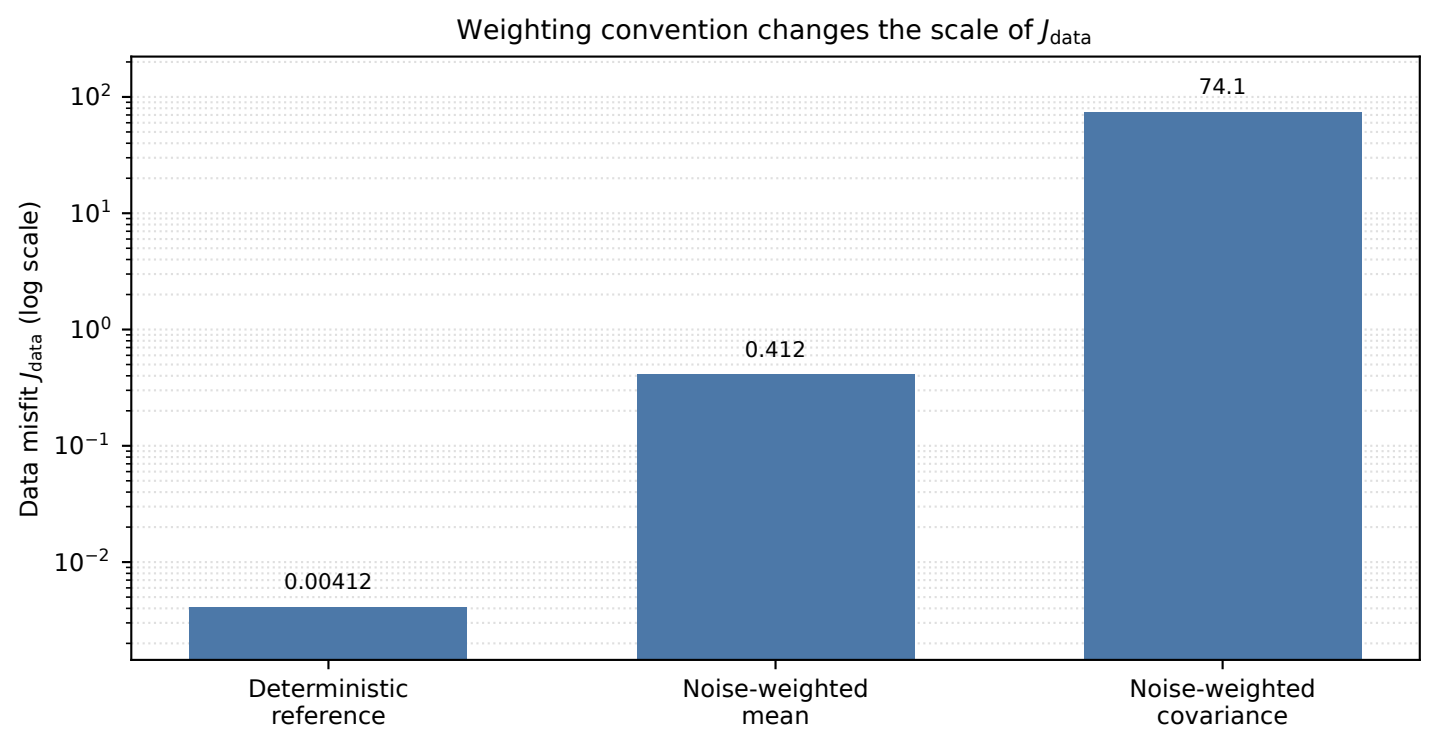
Weighting convention changes the scale of J_{data}
Data misfit J_{data} (log scale)
10^{2}
10^{1}
10^{0}
10^{-1}
10^{-2}
0.00412
0.412
74.1
Deterministic reference
Noise-weighted mean
Noise-weighted covariance