
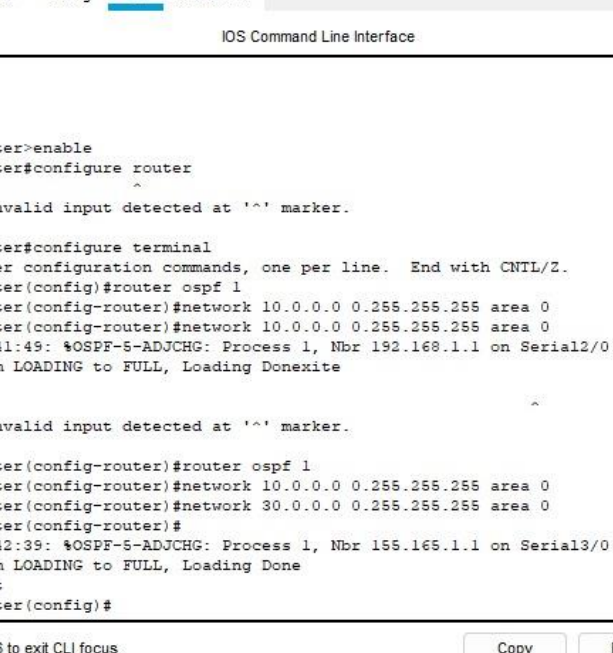


Experiment no. 07

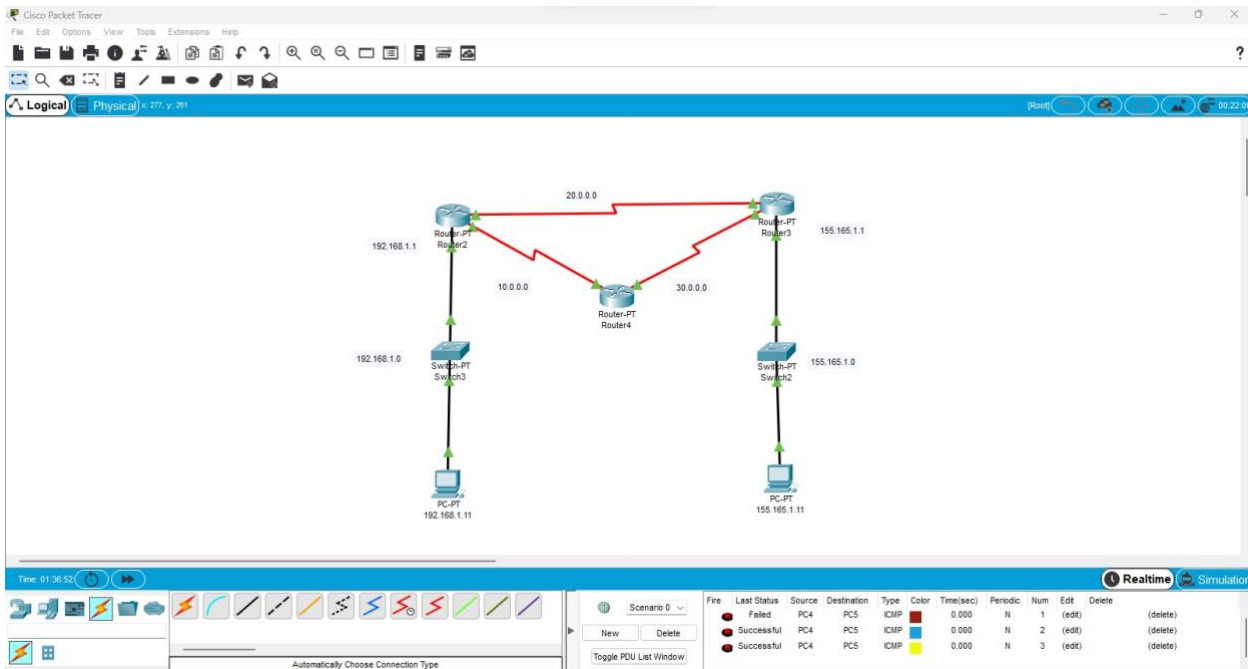

Router4

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Router>enable
Router#configure router
^
% Invalid input detected at '^' marker.

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 1
Router(config-router)#network 10.0.0.0 0.255.255.255 area 0
Router(config-router)#network 10.0.0.0 0.255.255.255 area 0
00:41:49: %OSPF-5-ADJCHG: Process 1, Nbr 192.168.1.1 on Serial2/0
from LOADING to FULL, Loading Done
^
% Invalid input detected at '^' marker.

Router(config-router)#router ospf 1
Router(config-router)#network 10.0.0.0 0.255.255.255 area 0
Router(config-router)#network 30.0.0.0 0.255.255.255 area 0
Router(config-router)#
00:42:39: %OSPF-5-ADJCHG: Process 1, Nbr 192.168.1.1 on Serial3/0
from LOADING to FULL, Loading Done
exit
Router(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

☐ Top

