

```
from google.colab import drive
drive.mount('/content/drive')
```

Mounted at /content/drive

```
import numpy as nm
import matplotlib.pyplot as mtp
import pandas as pd
```

```
file_path = '/content/drive/My Drive/knn_dataset.csv'
data_set = pd.read_csv(file_path)
```

```
pd.set_option('display.max_rows', None)
print("Dataset:")
print(data_set)
```

Dataset:

	User ID	Gender	Age	EstimatedSalary	Purchased
0	15624510	Male	19	19000	0
1	15810944	Male	35	20000	0
2	15668575	Female	26	43000	0
3	15603246	Female	27	57000	0
4	15804002	Male	19	76000	0
5	15728773	Male	27	58000	0
6	15598044	Female	27	84000	0
7	15694829	Female	32	150000	1
8	15600575	Male	25	33000	0
9	15727311	Male	35	65000	0
10	15570769	Female	26	80000	0
11	15606274	Male	26	52000	0
12	15746139	Male	20	86000	0
13	15704987	Male	32	18000	0
14	15628972	Male	18	82000	0
15	15697686	Male	29	80000	0
16	15733883	Male	47	25000	1
17	15617482	Male	45	26000	1
18	15704583	Male	46	28000	1
19	15621083	Female	48	29000	1
20	15649487	Male	47	49000	1
21	15736760	Female	47	41000	1

```
x= data_set.iloc[:, [2,3]].values
y= data_set.iloc[:, 4].values
from sklearn.model_selection import train_test_split
x_train, x_test, y_train, y_test= train_test_split(x, y, test_size= 0.25, random_state=0)
```

```
from sklearn.preprocessing import StandardScaler
st_x= StandardScaler()
x_train= st_x.fit_transform(x_train)
x_test= st_x.transform(x_test)
```

```
from sklearn.neighbors import KNeighborsClassifier
classifier= KNeighborsClassifier(n_neighbors=5, metric='minkowski', p=2 )
classifier.fit(x_train, y_train)
```

KNeighborsClassifier

```
KNeighborsClassifier()
```

```
y_pred= classifier.predict(x_test)
```


```
from sklearn.metrics import confusion_matrix
cm= confusion_matrix(y_test, y_pred)
```


```
from matplotlib.colors import ListedColormap
x_set, y_set = x_train, y_train
x1, x2 = nm.meshgrid(nm.arange(start = x_set[:, 0].min() - 1, stop = x_set[:, 0].max() + 1, step =0.01),
nm.arange(start = x_set[:, 1].min() - 1, stop = x_set[:, 1].max() + 1, step = 0.01))
mtp.contourf(x1, x2, classifier.predict(nm.array([x1.ravel(), x2.ravel()]).T).reshape(x1.shape),
alpha = 0.75, cmap = ListedColormap(('red', 'green' )))
mtp.xlim(x1.min(), x1.max())
mtp.ylim(x2.min(), x2.max())
```

```

for i, j in enumerate(nm.unique(y_set)):mtp.scatter(x_set[y_set == j, 0], x_set[y_set == j, 1],
c = ListedColormap(('red', 'green'))(i), label = j)
mtp.title('K-NN Algorithm (Training set)')
mtp.xlabel('Age')
mtp.ylabel('Estimated Salary')
mtp.legend()
mtp.show()

```


 /tmp/ipython-input-379525191.py:10: UserWarning: \*c\* argument looks like a single numeric RGB or RGBA sequence, which should be avoided for i, j in enumerate(nm.unique(y\_set)):mtp.scatter(x\_set[y\_set == j, 0], x\_set[y\_set == j, 1],

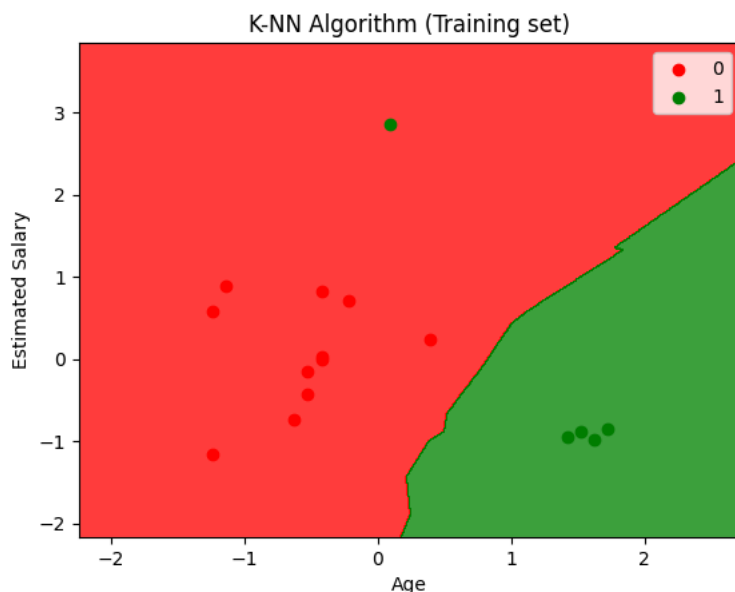

```

from matplotlib.colors import ListedColormap
x_set, y_set = x_test, y_test
x1, x2 = nm.meshgrid(nm.arange(start = x_set[:, 0].min() - 1, stop = x_set[:, 0].max() + 1, step =0.01),
nm.arange(start = x_set[:, 1].min() - 1, stop = x_set[:, 1].max() + 1, step = 0.01))
mtp.contourf(x1, x2, classifier.predict(nm.array([x1.ravel(), x2.ravel()]).T).reshape(x1.shape),
alpha = 0.75, cmap = ListedColormap(('red','green' )))
mtp.xlim(x1.min(), x1.max())
mtp.ylim(x2.min(), x2.max())
for i, j in enumerate(nm.unique(y_set)):mtp.scatter(x_set[y_set == j, 0], x_set[y_set == j, 1],
c = ListedColormap(('red', 'green'))(i), label = j)
mtp.title('K-NN algorithm(Test set)')
mtp.xlabel('Age')
mtp.ylabel('Estimated Salary')
mtp.legend()
mtp.show()

```

 /tmp/ipython-input-573469835.py:10: UserWarning: \*c\* argument looks like a single numeric RGB or RGBA sequence, which should be avoided for i, j in enumerate(nm.unique(y\_set)):mtp.scatter(x\_set[y\_set == j, 0], x\_set[y\_set == j, 1],

