

Bird classification final

by Girish Rane

Submission date: 14-Jul-2021 05:56PM (UTC+0530)

Submission ID: 1619525984

File name: 522_camerar_1.doc (349K)

Word count: 2648

Character count: 13967

Bird Classification based on Bird Sounds

¹ Girish Rane
Department of Electronics and
Telecommunication Engineering
College of Engineering, Pune
Pune, India
raneg119.extc@coep.ac.in

Priti P. Rege
Department of Electronics and
Telecommunication Engineering
College of Engineering, Pune
Pune, India
ppr.extc@coep.ac.in

³ Rashmika Patole
Department of Electronics and
Telecommunication Engineering
College of Engineering, Pune
Pune, India
rkp.extc@coep.ac.in

²⁴
Abstract— Automatic classification of bird calls plays an essential ¹²¹ in monitoring and protecting biodiversity. Classifying bird species is a challenging problem due to variant species present in the world. In this paper, we present the performance of Mel Frequency Cepstral Coefficients and Linear Frequency Cepstral Coefficients as feature ⁹ for classification of bird species. Exhaustive experimentation using Support Vector Machine, Artificial Neural Network and Convolution Neural Network used for classification is also reported. An accuracy of 93.37% is achieved with Convolution Neural Network and using a set of 39 MFCC features.

Keywords—MFCC, LFCC, Deep Convolutional Neural Network(CNN), SVM

I. INTRODUCTION

Acoustic communication is the major mode of communication among birds. Birds are difficult to be traced, and therefore, their sounds are very effective in detecting birds by the humans. Challenges of discriminative region localization make recognition of bird species difficult. It is difficult to identify bird sound without blare.

The significant studies in bird recognition are based on visual inspection of the birds and require a trained observer. Each bird species contain more than one syllabus. Recognition of bird species involves feature extraction and classification. The extraction of features and choice of the classification algorithm affects the performance of the classification system. A variety of methods have been used for the automatic recognition of bird species. The deep learning model has recently attracted a lot of attention due to its high performance in building automatic bird sound classification systems.

II. LITERATURE SURVEY


Authors in [1] ²⁵ have used MFCC for each bird species as features. The Gaussian Mixture Model(GMM) and Vector Quantization(VQ) models are used for identifying the most appropriate GMM component ⁹ and numbered the clusters of VQ for each species. In [2], Dynamic Time Warping (DTW) is utilized to differentiate the spectrograms of birds sound.

For identification of various bird species, different features like sets of Mel Frequency Cepstral Coefficients (MFCC) and Gammatone Frequency Cepstral Coefficients(GFCC) are considered as the features in [3]. Support Vector Machine(SVM), k-nearest neighbour (KNN), Artificial Neural Network(ANN) are used as classifiers. Various techniques employed in classification of speech are explored

for the recognition of bird sound. The researchers also used Hidden Markov Models(HMM) to classify data with the minimum number of training and testing samples [4].

In [5], six different species were compared with three different types of ¹⁸ feature vectors. The classification algorithms used are k-nearest neighbors (KNN) and Support Vector Machine(SVM). In this paper, two types of feature extraction techniques based on MFCC and LFCC are proposed with Artificial Neural Network(ANN) and Support Vector Machine (SVM), and Convolution Neural Network (CNN) as classifiers. A convolution neural network is an efficient way to extract information and classification [6]. Jürgen T. Geiger, Björn Schuller, Gerhard Rigoll [10] used recordings of 10 acoustic environments and a sliding window approach and SVM to classify them. Authors in [13] have created a vector of 13 MFCC features and first three Principal components. Further, they have used Vector Quantization to compress the vector. KNN ²⁰ used as a classifier. P. Jancovic and M. Köküe [14] used Deep Neural Network-Hidden Markov Models(DNN-HMM) to recognize bird species.

III. METHODOLOGY

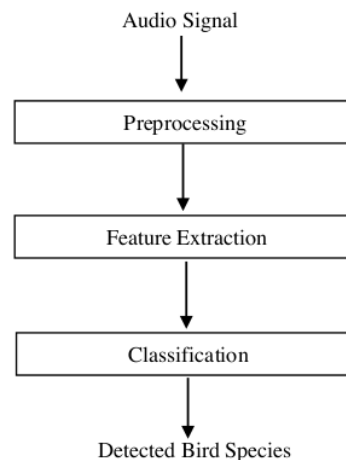

¹⁷
Figure 1: The block diagram of the proposed bird species recognition system

As shown in Figure 1, we have three parent blocks for the bird species recognition system. The blocks are discussed in the following subsections.

A) PREPROCESSING:

In the proposed studies, all bird sound recording files are taken from xeno-canto.com[7]. This website is dedicated to the bird's files dataset. Table 1 contains the list of species with scientific names and the number of files considered for the bird's sound classification. Each audio file is divided into 3 seconds chunk file. Each chunk must contain at least one syllabus of bird species. As the recordings have background noise, the subtraction algorithm [8] is used for noise removal. The sampling frequency is 16000Hz. For framing, we have used a 20 milliseconds window with 50% overlap, and the size of FFT is 512. The overall dataset is split into the training dataset with 70% samples and the testing dataset with the remaining 30 % data.

Table 1 Dataset used

Sr. No.	Bird species	Scientific name	Number of Files
1	Red-whiskered Bulbul(RB)	<i>Pycnonotusjocosus</i>	236
2	Great Tilt(GT)	<i>Parus major</i>	243
3	Willow Warbler(WW)	<i>Phylloscopus trochilus</i>	262
4	European Pied Flycatcher(EF)	<i>Ficedulahypoleuca</i>	264
5	Common Blackbird(CB)	<i>Turdus merula</i>	256
6	Common Redstart(CR)	<i>Phoenicurusphoenicurus</i>	188
7	Greenish Warbler(GW)	<i>phylloscopustorquatus</i>	207
8	Blue Jay(BJ)	<i>Cyanocitta cristata</i>	276
9	Common Snipe(CS)	<i>Gallinagallinago</i>	244
10	Whistling Duck(WD)	<i>Denfrocygnaviduta</i>	182
			Total2358

B) FEATURE EXTRACTION

MFCC and LFCC are usually used for speech recognition. Each speech signal is pre-emphasized and transformed into the frequency domain. The frequency-domain signal is divided into small frames. The normal frequency is converted to Mel scale frequency. The conversion formula is given by,

$$\text{Mel}(f) = S_k = 2595 * \log\left(1 + \frac{f}{700}\right) \quad (1)$$

The spectrum and the Mel scale filter bank are multiplied. Following this, each filter bank's log energy is computed. The Cepstral coefficients are derived using discrete cosine transform. The first thirteen coefficients, delta coefficients (Δ) and double delta coefficients ($\Delta\Delta$), are selected for bird classification.

The main difference between LFCC and MFCC is in the selection of filter banks. LFCC uses a Linear filter bank, while MFCC uses a Mel filter Bank. The use of a linear frequency filter bank is to detect sounds at a higher frequency. The linear frequency cepstral coefficients (LFCC) are calculated as,

$$C_{lm}[n, m] = \frac{1}{R} \sum_{l=0}^{R-1} \left(\log \{E_{lm}(n, l)\} \cos \left(\frac{2\pi}{R} lm \right) \right) \quad (2)$$

Where R is the number of filters, and $E_{lm}(n, l)$ represents the energy of each frame.

C) CLASSIFICATION

For classification, we have use SVM, ANN, and CNN. In the feature extraction method, the Feature vector of each frame is calculated, and each feature vector contains delta coefficient(Δ) and double delta coefficients.

1) SUPPORT VECTOR MACHINE(SVM)

Support Vector Machines are based on structural risk minimization [13]. SVM creates a hyperplane that separates features from two or more classes. The distance between hyperplane and support vector is called marginal distance. The aim is to maximize this marginal distance and minimize training error. It uses kernel version and accurate for classification and rapid learning. The selection of kernel is based on application and performance. The linear kernel used for high-dimensional features. For the SVM classifier, the mean value of each frame is used for the classification of different species. The SVM classifier uses a training set of labels and learns classification functions automatically. Each species represent one class.

2) ARTIFICIAL NEURAL NETWORK(ANN)

ANN models consist of multiple layers viz. the input layer, hidden layer followed by an output layer. Each layer contains nodes, also called neurons, that process data. The accuracy of a neural network depends on the number of hidden layers. In the input layer, set of neuron represents the coefficients, and the output layer represents the number of species. In the ANN network, each hidden layer learns the pattern of the previously selected hidden layer. The hidden layer contains 3 fully connected layers. Each fully connected layer identifies features from the previous layer and correlates them. ReLU activation function gives the best performance of each hidden layer. At the output layer, the softmax activation function predicts the probability of each class. A total of 10 neurons, representing 10 bird classes are used in the output layer. The highest probability out of 10 classes defines the output of the input layer.

22

3) Convolution Neural Network(CNN)

12 Convolution Neural Network model has two convolution layers followed by two dense layers. Each convolution layer contains a filter size of 3x3 with stride 1.. For training data, we used categorical cross-entropy with Adam optimizer. The learning rate is 0.11. The input value of convolution neural network MxN, where M represents the number of frames and N is the number of features present in each bird file. The model is trained and tested on 13, 26, and 39 coefficients.

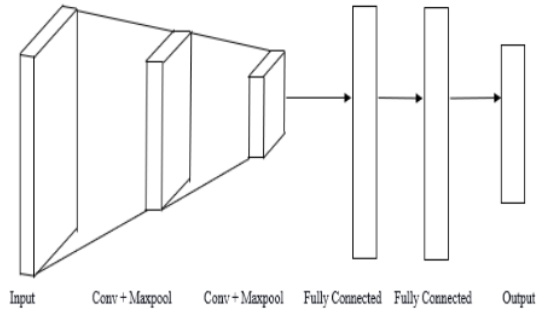


Figure 2 CNN Architecture

As shown in Figure 2, Each convolution layer learns a pattern of data and reduces the dimensions. The first two convolution layers contain 32 and 64 kernel filters, respectively. The number of filters always equals the number of feature maps of the next layer. The filter size of 3x3 with the Max-pool layer brings down the size of the feature map. After two convolution layers, flatten layer is used. Flatten layer converts 2-Dimensional layer to a 1-Dimensional array, also called a fully connected layer. Every neuron from the fully connected layer is coupled with another fully connected layer.

Each fully connected layer uses ReLU as activation functions. We have trained the model for 30 epochs. Categorical cross-entropy is used as a loss function. This loss function summarizes the average value of actual and predicted classes. At the output layer, the softmax activation function calculates the probability of each class.

IV. RESULT AND DISCUSSION

Table 1 depicts the description of species. There are 2358 individual bird files from 10 species. The Species Recognition Accuracy (SRA) is calculated as [8]:

$$SRA = \frac{CS_A}{NS_A} \times 100 \quad (3)$$

CS_A represents the number of correctly classified files representing various bird species. Total number of test files used are NS_A . The Reliability in expressing the species is given by:

$$Rel = \frac{CS_A}{MS_A} \times 100 \quad (4)$$

Here, CS_A represents the number of species that are correctly classified. The total number of test files is MS_A . We calculate the Accuracy of the model as :

$$O.A. = \frac{C_A}{M_A} \times 100 \quad (5)$$

28

Where M_A is the number of test files and C_A represents the correctly classified files.

The OA for MFCC is 82.37% for MFCC and 85.53% for LFCC in SVM. The confusion matrix is shown in Table 2 and Table 3. The maximum accuracy of ANN 91.60% for MFCC (13) features and 92.02% for LFCC (13) features. The OA accuracy of MFCC with 39 features is 93.37%, and LFCC with 39 features is 92.31%. The performance of the result highly depends on the removal of noise.

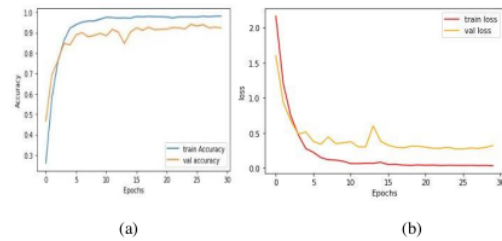


Figure 3. (a) Accuracy curve (b) Loss curve of 39 MFCC Features

Table 4. Comparison of classification accuracies for MFCC and LFCC

Paper	Feature /Classifier used	Accuracy
Bang et al. [13]	MFCC+ PCA/ KNN	82
Patole et al. [9]	MFCC /SVM	91.7
	MFCC/ ANN	91.6
Proposed technique	MFCC (13 coefficients)/ SVM	89.10
	LFCC (13 coefficients)/ SVM	85.87
	MFCC (13 coefficients)/ ANN	91.60
	LFCC (13 coefficients)/ ANN	92.02
	MFCC (13 coefficients)/ CNN	89.68
	LFCC (13 coefficients)/ CNN	89.27
	MFCC (26 coefficients)/ CNN	92.55
	LFCC (26 coefficients)/ CNN	91.50
	MFCC (39 coefficients)/ CNN	93.37
	LFCC (39 coefficients)/ CNN	92.31

27

V. CONCLUSION AND FUTURE WORK

In this paper, three sets of classifiers and feature set selected to classify bird species. CNN with 39 feature coefficients give the highest accuracy with both feature set. An accuracy of 93.37 % has been achieved. The accuracy can be improved by selecting the number of features in the feature set. The performance of the model is enhanced by suppressing background noise in bird sound recordings.

REFERENCES

- [1] M. T. Lopes, L. L. Gioppo, T. T. Higushi, C. A. A. Kaestner, C. N. Silla Jr. and A. L. Koerich, "Automatic Bird Species Identification for Large Number of Species," 2011 IEEE International Symposium on Multimedia, 2011, pp. 117-122, doi: 10.1109/ISM.2011.27
- [2] Anderson SE, Dave AS, Margoliash D. "Template-based Automatic Recognition of Birdsong Syllables from Continuous Recordings." J Acoust Soc Am. 1996 Aug;100(2 Pt 1):1209-19. doi: 10.1121/1.415968. PMID: 8759970.
- [3] Patole R., Rege P. (2021) Acoustic Classification of Bird Species. In: Merchant S.N., Warhade K., Adhikari D. (eds) Advances in Signal and Data Processing. Lecture Notes in Electrical Engineering, vol 703. Springer, Singapore. https://doi.org/10.1007/978-981-15-8391-9_23
- [4] Trifa VM, Kirschel AN, Taylor CE, Vallejo EE. "Automated Species Recognition of Antbirds in a Mexican Rainforest using Hidden Markov Models." J Acoust Soc Am. 2008 Apr;123(4):2424-31. doi: 10.1121/1.2839017. PMID: 18397045.
- [5] Briggs, Forrest & Raich, Raviv & Fern, Xiaoli. (2009). "Audio Classification of Bird Species: A Statistical Manifold Approach." 51-60. 10.1109/ICDM.2009.65.
- [6] Salamon J., & Bello, J.P. (2017). "Deep Convolutional Neural Networks and Data Augmentation for Environmental Sound Classification." IEEE Signal Processing Letters, 24(3)279-283.[7829341]. <https://doi.org/10.1109/LSP.2017.2657381>.
- [7] Xeno-canto.URL :www.xeno-canto.org
- [8] S.F. Boll," Suppression of Acoustic Noise in Speech using Spectral Subtraction," in IEEE Transactions on Acoustics, Speech, and Signal Processing, vol 27,no.2, pp.113-120, April 1979,doi:10.1109/TASSP.1979.1163209,pp.113:120,1979.
- [9] Patole R., Rege P. (2021) Acoustic Classification of Bird Species. In: Merchant S.N., Warhade K., Adhikari D. (eds) Advances in Signal and Data Processing. Lecture Notes in Electrical Engineering, vol 703. Springer, Singapore.
- [10] Geiger J.T., Schuller B., Rigoll G. (2013) "Large-Scale Audio Feature Extraction and SVM for Acoustic Scenes Classification", In: Applications of Signal Processing to Audio and Acoustics (WASPAA)2013 IEEE Workshop on IEEE
- [11] G.P. Zhang, E.B. Patuwo, Y.H. Michael, "Forecasting with Artificial Neural Networks: The State of the Art", Int. J.Forecast. 14 (1) (1998) 3562
- [12] Ekta Gambhir, Ritika Jain, Alankrit Gupta and Uma Tomer "Regression Analysis of COVID-19 using Machine Learning Algorithms" Proceedings of the International Conference on Smart Electronics and Communication (ICOSEC 2020) IEEE Xplore Part Number: CFP20V90-ART; ISBN:978-1-7281-5461-9
- [13] Arti Bang, Priti P.Rege," Recognition of Bird Species from their Sounds using data Reduction Techniques", ACM international proceeding series, ICCCT-2017,November 24-26, Allahabad,India, 2017. ISBN: 978-1-4503-5324-3,DOI:10.1145/3154979.3155002.
- [14] P. Jancovic and M. Köküer, "Bird Species Recognition Using Unsupervised Modeling of Individual Vocalization Elements," in IEEE/ACM Transactions on Audio, Speech, and Language Processing, vol. 27, no. 5, pp. 932-947, May 2019, doi: 10.1109/TASLP.2019.2904790.

Bird classification final

ORIGINALITY REPORT

15%

SIMILARITY INDEX

9%

INTERNET SOURCES

12%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

- | | | |
|--|--|--|
| <div style="background-color: red; color: white; width: 40px; height: 40px; display: flex; align-items: center; justify-content: center; margin: 10px 0;">1</div> | <div style="color: red; margin: 10px 0;">Omkar Prabhune, Priti P. Rege.
"SpeakingEyes: Enabling Paralyzed People to Communicate", 2019 IEEE 16th India Council International Conference (INDICON), 2019
<small>Publication</small></div> | <div style="font-size: 2em; margin: 10px 0;">1</div> <div style="font-size: 0.8em; margin: 0;">%</div> |
| <hr/> | | |
| <div style="background-color: purple; color: white; width: 40px; height: 40px; display: flex; align-items: center; justify-content: center; margin: 10px 0;">2</div> | <div style="color: purple; margin: 10px 0;">www.hindawi.com
<small>Internet Source</small></div> | <div style="font-size: 2em; margin: 10px 0;">1</div> <div style="font-size: 0.8em; margin: 0;">%</div> |
| <hr/> | | |
| <div style="background-color: purple; color: white; width: 40px; height: 40px; display: flex; align-items: center; justify-content: center; margin: 10px 0;">3</div> | <div style="color: purple; margin: 10px 0;">Shreyas Kulkarni, Sarang Junghare, Ashok Sapkal. "PWM controlled independent six wheel drive for an all-terrain robotic vehicle", 2014 IEEE International Conference on Power Electronics, Drives and Energy Systems (PEDES), 2014
<small>Publication</small></div> | <div style="font-size: 2em; margin: 10px 0;">1</div> <div style="font-size: 0.8em; margin: 0;">%</div> |
| <hr/> | | |
| <div style="background-color: teal; color: white; width: 40px; height: 40px; display: flex; align-items: center; justify-content: center; margin: 10px 0;">4</div> | <div style="color: teal; margin: 10px 0;">Nilesh M. Patil, Milind U. Nemade. "Content-based audio classification and retrieval: A novel approach", 2016 International Conference on Global Trends in Signal Processing, Information Computing and Communication (ICGTSPICC), 2016
<small>Publication</small></div> | <div style="font-size: 2em; margin: 10px 0;">1</div> <div style="font-size: 0.8em; margin: 0;">%</div> |
-

5	www.springerprofessional.de Internet Source	1 %
6	Submitted to Higher Education Commission Pakistan Student Paper	1 %
7	indico2.conference4me.psnc.pl Internet Source	1 %
8	www.comp.nus.edu.sg Internet Source	1 %
9	"Advances in Signal and Data Processing", Springer Science and Business Media LLC, 2021 Publication	1 %
10	eprints.whiterose.ac.uk Internet Source	1 %
11	"Pattern Recognition and Machine Intelligence", Springer Science and Business Media LLC, 2017 Publication	<1 %
12	Thomas Schnelldorfer, Matthew P. Ware, Li Ping Liu, Michael G. Sarr, Desmond H. Birkett, Robin Ruthazer. "Can We Accurately Identify Peritoneal Metastases Based on Their Appearance? An Assessment of the Current Practice of Intraoperative Gastrointestinal	<1 %

Cancer Staging", Annals of Surgical Oncology, 2019

Publication

13

avestia.com

Internet Source

<1 %

14

"Computational Intelligence in Pattern Recognition", Springer Science and Business Media LLC, 2020

Publication

<1 %

15

Deepank Verma, Arnab Jana, Krithi Ramamritham. "Classification and mapping of sound sources in local urban streets through AudioSet data and Bayesian optimized Neural Networks", Noise Mapping, 2019

Publication

<1 %

16

Malhotra, B.. "Distributed classification of acoustic targets in wireless audio-sensor networks", Computer Networks, 20080917

Publication

<1 %

17

Mporas, I., T. Ganchev, O. Kocsis, N. Fakotakis, O. Jahn, K. Riede, and K. L. Schuchmann. "Automated Acoustic Classification of Bird Species from Real -Field Recordings", 2012 IEEE 24th International Conference on Tools with Artificial Intelligence, 2012.

Publication

<1 %

18

doctorpenguin.com

Internet Source

<1 %

19	dokumen.pub Internet Source	<1 %
20	pure-oai.bham.ac.uk Internet Source	<1 %
21	www.ijates.com Internet Source	<1 %
22	Anuroop Mishra, Abhyudya Bajpai, Anubhav Mishra, Abhinav Mishra. "Autonomous Defence Vehicle for Precise Targeting and Mission Accomplishment – A Survey of Various Technologies", 2020 International Conference on Smart Electronics and Communication (ICOSEC), 2020 Publication	<1 %
23	Arti V. Bang, Priti P. Rege. "Chapter 35 Automatic Recognition of Bird Species Using Human Factor Cepstral Coefficients", Springer Science and Business Media LLC, 2018 Publication	<1 %
24	Jie Xie, Kai Hu, Mingying Zhu, Jinghu Yu, Qibing Zhu. "Investigation of Different CNN-Based Models for Improved Bird Sound Classification", IEEE Access, 2019 Publication	<1 %
25	Silla, Carlos N., and Celso A.A. Kaestner. "Hierarchical Classification of Bird Species Using Their Audio Recorded Songs", 2013 IEEE	<1 %

International Conference on Systems Man and Cybernetics, 2013.

Publication

26

Steen, Kim Arild, Ole Roland Therkildsen, Henrik Karstoft, and Ole Green. "A Vocal-Based Analytical Method for Goose Behaviour Recognition", Sensors, 2012.

Publication

<1 %

27

doi.org

Internet Source

<1 %

28

pdfs.semanticscholar.org

Internet Source

<1 %

29

usir.salford.ac.uk

Internet Source

<1 %

30

Arti V. Bang, Priti P. Rege. "Recognition of Bird Species from their Sounds using Data Reduction Techniques", Proceedings of the 7th International Conference on Computer and Communication Technology - ICCCT-2017, 2017

Publication

<1 %

31

Fatima Es-Sabery, Abdellatif Hair, Junaid Qadir, Beatriz Sainz-De-Abajo, Begona Garcia-Zapirain, Isabel Torre-Diez. "Sentence-Level Classification Using Parallel Fuzzy Deep Learning Classifier", IEEE Access, 2021

Publication

<1 %

Exclude quotes Off

Exclude matches

< 7 words

Exclude bibliography On