

Bird Classification based on Bird Sounds

Abstract--Automatic classification of bird calls plays an essential role in monitoring and protecting biodiversity. Clasifiying bird species is a challenging problem due to variant species present in the world. In this paper, we present the performance of Mel Frequency Cepstral Coefficients and Linear Frequency Cepstral Coefficients with Support Vector Machine(SVM), Artificial Neural Network(ANN) and Convolution Neural Network(CNN) used for classification. An accuracy of 93.37% is achieved with Convolution Neural Network and using a set of 39 MFCC features.

Keywords—MFCC, LFCC, Deep convolutional Neural Network(CNN),SVM

I. INTRODUCTION

Acoustic communication is the major mode of communication among birds. Birds are difficult to be traced, and therefore, their sounds are very effective in detecting birds by the humans. Recognizing bird species is difficult due to the challenges of discriminative region localization. It is difficult to identify bird sound without blare.

The significant studies in bird recognition are based on visual inspection of the birds and require a trained observer. Each bird species contain more than one syllabus. Recognition of bird species involves feature extraction and classification. The extraction of features and choice of the classification algorithm affects the performance of the classification system A variety of methods have been used for the automatic recognition of bird species. The deep learning model has recently attracted a lot of attention due to its high performance in building automatic bird sound classification systems.

II. LITERATURE SURVEY

Authors in [1], have used MFCC for each bird species as features. The Gaussian Mixture Model(GMM) and Vector Quantization(VQ) models are used for identifying the most appropriate GMM component and cluster number of VQ for each species. In[2], Dynamic Time Warping (DTW) is utilized to differentiate the spectrograms of birds sound.

For identification of various bird species, different features like sets of Mel Frequency Cepstral Coefficients (MFCC) and Gammatone Frequency Cepstral Coefficients(GFCC) are considered as the features in [3]. Support Vector Machine(SVM), k-nearest neighbour (KNN), Artificial Neural Network(ANN) are used as classifiers. Various approaches that are widely used in

speech classification are explored for the recognition of bird sound. The researchers also used Hidden Markov Models(HMM) to classify data with the minimum number of training and testing samples[4].

In [5], six different species were compared with three different types of feature vectors. The classification algorithms used are k-nearest neighbours (KNN) and Support Vector Machine(SVM).In this paper, two types of feature extraction techniques based on MFCC and LFCC are proposed with Support Vector Machine (SVM), Artificial Neural Network(ANN) and Convolution Neural Network (CNN) as classifiers. A convolution neural network is an efficient way to extract information and classification [6]. Jürgen T. Geiger, Björn Schuller, Gerhard Rigoll [10] used 30 second long recording of 10 different acoustic scenes and used a sliding window approach and SVM to classify them.

III. METHODOLOGY

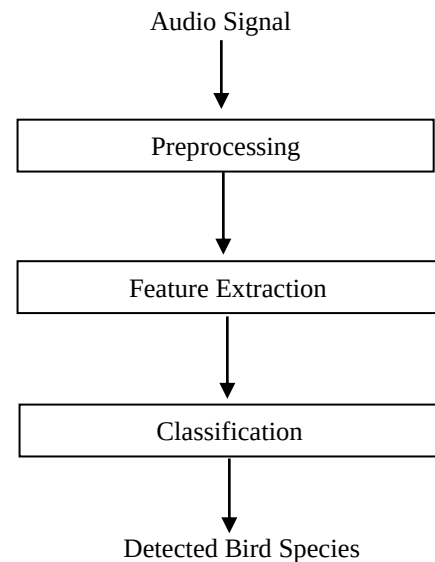


Figure 1:The block diagram of the proposed bird species recognition system

As shown in Figure 1, we have three parent blocks for the bird species recognition system. The blocks are discussed in the following subsections.

A) PREPROCESSING:

In the proposed studies, all bird sound recording files are taken from Xeno-canto.com[7]. This website is dedicated to the bird's files dataset. Table 1 contains the list of species with scientific names and the number of files considered for the bird's sound classification. Each audio file is divided

into 3 seconds chunk file. Each chunk must contain at least one syllabus of bird species. As the recordings have background noise, the subtraction algorithm [8] is used for noise removal. The sampling frequency is 16000Hz. For framing, we have used a 20 milliseconds window with 50% overlap, and the size of FFT is 512. The overall dataset is divided into two parts, i.e., the training dataset and the testing dataset. 70 % of the dataset is used for training data, and the remaining 30 % testing data.

Table 1 Dataset used

Sr. No.	Bird species	Scientific name	Number of Files
1	Red-whiskered Bulbul(RB)	<i>Pycnonotusjocosus</i>	236
2	Great Tilt(GT)	<i>Parus major</i>	243
3	Willow Warbler(WW)	<i>Phylloscopus trochilus</i>	262
4	European Pied Flycatcher(EF)	<i>Ficedulahypoleuca</i>	264
5	Common Blackbird(CB)	<i>Turdus merula</i>	256
6	Common Redstart(CR)	<i>Phoenicurusphoenicurus</i>	188
7	Greenish Warbler(GW)	<i>phylloscopustor-chiloidesviridatus</i>	207
8	Blue Jay(BJ)	<i>Cyanocitta cristata</i>	276
9	Common Snipe(CS)	<i>Gallinagogallinago</i>	244
10	Whistling Duck(WD)	<i>Denfrocygnaviduta</i>	182
			Total2358

B) FEATURE EXTRACTION

MFCC and LFCC are usually used for speech recognition. Each speech signal is pre-emphasized and transformed into the frequency domain. The frequency-domain signal is divided into small frames. The normal frequency is converted to Mel scale frequency. The conversion formula is given by,

$$\text{Mel}(f) = S_k = 2595 * \log(1 + \frac{f}{700}) \quad (1)$$

The spectrum is then multiplied by the Mel scale filter bank, and each filter bank's log energy is computed. The discrete cosine transform is calculated for cepstral coefficients. The first thirteen coefficients, delta coefficients (Δ) and double delta coefficients ($\Delta\Delta$), are selected for bird classification.

The main difference between LFCC and MFCC is in the selection of filter banks. LFCC uses a Linear filter bank, while MFCC uses a Mel filter Bank. The use of a linear frequency filter bank is to detect sounds at a higher frequency. The linear frequency cepstral coefficients (LFCC) are calculated as,

$$C_{in}[n, m] = \frac{1}{R} \sum_{l=0}^{R-1} \left(\log \{E_{in}(n, l)\} \cos \left(\frac{2\pi}{R} lm \right) \right) \quad (2)$$

Where R is the number of filters, and $E_{in}(n, l)$ represents the energy of each frame.

C) CLASSIFICATION

For classification, we use Support Vector Machine (SVM), Convolutional Neural Network (CNN), and Artificial Neural Network (ANN). In the feature extraction method, the Feature vector of each frame is calculated, and each feature vector contains delta coefficient(Δ) and double delta coefficients

1) SUPPORT VECTOR MACHINE(SVM)

Support Vector Machines are based on structural risk minimization [13]. SVM is a supervised machine learning algorithm used for classification and regression. SVM creates a hyperplane that separates features from two or more classes. The distance between hyperplane and support vector is called marginal distance. The aim is to maximize this marginal distance and minimize training error. It uses kernel version and accurate for classification and rapid learning. The selection of kernel is based on application and performance. The linear kernel used for high-dimensional features. For the SVM classifier, the mean value of each frame is used for the classification of different species.

2) ARTIFICIAL NEURAL NETWORK(ANN)

ANN models consist of multiple layers viz. the input layer, hidden layer followed by an output layer. Each layer contains nodes, also called neurons, that process data. The accuracy of a neural network depends on the number of hidden layers. In the input layer, each neuron represents the number of coefficients, and the output layer represents the number of species. In the ANN network, each hidden layer

learns the pattern of the previously selected hidden layer. ReLU activation function gives the best performance of each hidden layer. At the output layer, the softmax activation function predicts the probability of each class.

3) Convolution Neural Network(CNN)

For Convolution Neural Network model has two convolution layers followed by two dense layers. Each convolution layer contains a filter size of 3x3 with stride 1.. For training data, we used categorical cross-entropy with Adam optimizer. The learning rate is 0.001. The input value of convolution neural network MxN, where M represents the number of frames and N is the number of features present in each bird file. The model is trained and tested on 13, 26, and 39 coefficients.

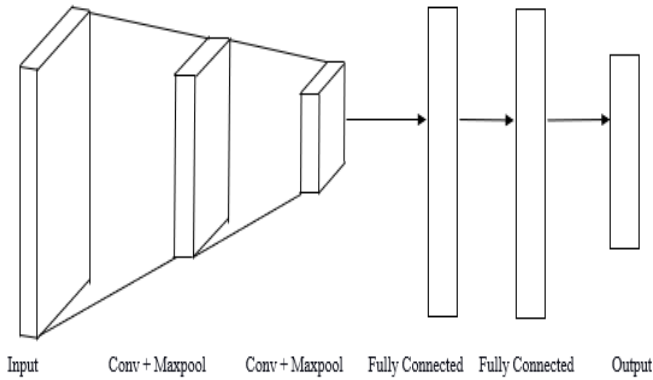


Figure 2 CNN Architecture

As shown in Figure 2, Each convolution layer learns a pattern of data and reduces the dimensions. The first two convolution layers contain 32 and 64 kernel filters, respectively. The number of filters always equals the number of feature maps of the next layer. The filter size of 3x3 with the Max-pool layer reduces the size of the feature map. After two convolution layers, flatten layer used. Each fully connected layer uses ReLU as activation functions. We have trained the model for 30 epochs. Categorical cross-entropy is used as a loss function. This loss function summarizes the average value of actual and predicted classes. At the output layer, the softmax activation function calculates the probability of each class.

IV. RESULT AND DISCUSSION

Table 1 shows the description of species with scientific names. There are 2358 individual bird files from 10 species.

The Species Recognition Accuracy (SRA) is calculated as [8]:

$$SRA = \frac{CS_A}{NS_A} \times 100 \quad (3)$$

CS_A represents the number of correctly classified files representing various bird species. Total number of test files used are NS_A . The Reliability in expressing the species is given by:

$$Rel = \frac{CS_A}{MS_A} \times 100 \quad (4)$$

Here, CS_A represents the number of species that are correctly classified. The total number of test files is MS_A . We calculate the Overall Accuracy of the system as :

$$O.A. = \frac{C_A}{M_A} \times 100 \quad (5)$$

Where M_A is the total number of test files and C_A is the total number of correctly classified files.

The OA for MFCC is 82.37% for MFCC and 85.53% for LFCC in SVM. The confusion matrix is shown in Table 2 and Table 3. The maximum accuracy of ANN 91.60% for MFCC (13) features and 92.02% for LFCC (13) features. The OA accuracy of MFCC with 39 features is 93.37%, and LFCC with 39 features is 92.31%. The performance of the result highly depends on the removal of noise.

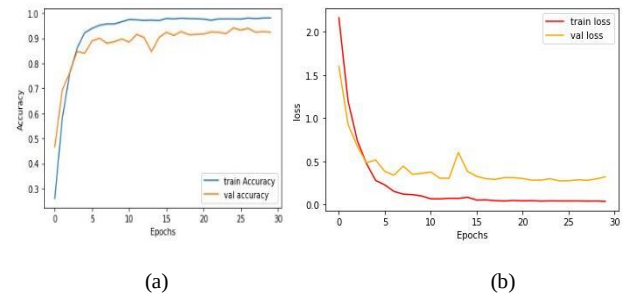


Figure 3. (a) Accuracy curve (b) Loss curve of 39 MFCC Features

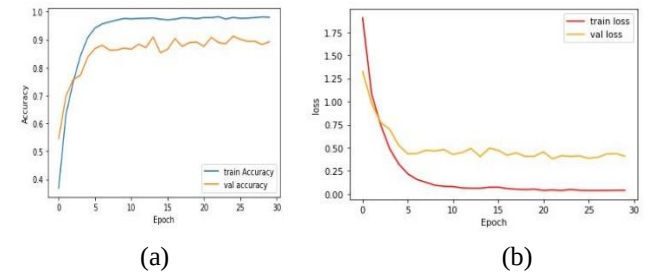


Figure 4. (a) Accuracy curve (b) Loss curve of 39 LFCC Features

The accuracy and loss curve of both MFCC and LFCC features shown in Figure 3 and Figure 4

Table 2: Confusion matrix for bird classification using 13 MFCCs

	Number of correctly recognized birds in the specific class										Acc(%)
	RB	GT	WW	EF	CB	CR	GW	BJ	CS	WD	
RB	36	1	2	0	0	0	0	1	4	0	82
GT	3	45	0	1	0	0	2	0	0	0	88
WW	2	0	37	4	0	0	1	4	0	0	77
EF	0	0	9	47	1	0	0	1	0	0	81
CB	0	0	2	6	43	2	0	0	0	0	81
CR	1	0	5	0	0	19	0	0	0	0	76
GW	4	1	3	0	0	0	48	1	0	0	84
BJ	0	0	0	0	0	0	4	43	8	6	70
CS	1	0	0	0	0	0	0	0	39	1	95
WD	1	0	0	0	0	0	0	2	0	36	92
%Rel.	75	96	64	81	98	90	87	83	76	84	
Overall Accuracy: 82.38 %											

Table 3: Recognition result with LFCC (13) features

	Number of correctly recognized birds in the specific class										Acc(%)
	RB	GT	WW	EF	CB	CR	GW	BJ	CS	WD	
RB	50	0	1	0	0	0	0	2	3	0	89
GT	1	38	0	1	2	0	0	0	0	0	90
WW	0	0	37	9	0	1	2	0	0	3	71
EF	0	2	1	54	0	0	0	0	0	0	95
CB	0	0	1	5	42	0	1	0	0	0	86
CR	0	0	3	2	0	23	0	2	0	0	77
GW	0	0	3	0	0	0	57	1	0	0	93
BJ	2	0	0	0	0	0	4	39	1	3	80
CS	4	0	0	0	0	0	0	8	34	0	74
WD	0	0	0	0	1	0	0	0	0	34	97
%Rel.	88	95	80	76	93	96	89	75	89	85	
Overall Accuracy: 85.53%											

Table 4. Comparison of classification accuracies for MFCC and LFCC

Classifier/ Feature	MFCC	LFCC
SVM (13 coefficients)	89.10	85.87
ANN(13 coefficients)	91.60	92.02
CNN with 13 coefficients	89.68	89.27
CNN with 26 coefficients	92.55	91.50
CNN with 39 coefficients	93.37	92.31

V. CONCLUSION AND FUTURE WORK

In this paper, three sets of classifiers and feature set selected to classify bird species. CNN with 39 feature coefficients give the highest accuracy with both feature set. An accuracy of 93.37 % has been achieved. The accuracy can be improved by selecting the number of features in the feature set. The performance of a system is enhanced by suppressing background noise in bird sound recordings.

REFERENCES

- [1] M. T. Lopes, L. L. Gioppo, T. T. Higushi, C. A. A. Kaestner, C. N. Silla Jr. and A. L. Koerich, "Automatic Bird Species Identification for Large Number of Species," 2011 IEEE International Symposium on Multimedia, 2011, pp. 117-122, doi: 10.1109/ISM.2011.27
- [2] Anderson SE, Dave AS, Margoliash D. Template-based automatic recognition of birdsong syllables from continuous recordings. *J Acoust Soc Am.* 1996 Aug;100(2 Pt 1):1209-19. doi: 10.1121/1.415968. PMID: 8759970.
- [3] Patole R., Rege P. (2021) Acoustic Classification of Bird Species. In: Merchant S.N., Warhade K., Adhikari D. (eds) *Advances in Signal and Data Processing. Lecture Notes in Electrical Engineering*, vol 703. Springer, Singapore. https://doi.org/10.1007/978-981-15-8391-9_23
- [4] Trifa VM, Kirschel AN, Taylor CE, Vallejo EE. Automated species recognition of antbirds in a Mexican rainforest using hidden Markov models. *J Acoust Soc Am.* 2008 Apr;123(4):2424-31. doi: 10.1121/1.2839017. PMID: 18397045.
- [5] Briggs, Forrest & Raich, Raviv & Fern, Xiaoli. (2009). Audio Classification of Bird Species: A Statistical Manifold Approach. 51-60. 10.1109/ICDM.2009.65.
- [6] Salamon, J., & Bello, J.P. (2017). Deep Convolutional Neural Networks and Data Augmentation for Environmental Sound Classification. *IEEE Signal Processing Letters*, 24(3), 279-283. [7829341]. <https://doi.org/10.1109/LSP.2017.2657381>.
- [7] Xeno-canto. URL : www.xeno-canto.org
- [8] S.F. Boll, "Suppression of acoustic noise in speech using spectral subtraction," in *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol 27, no. 2, pp. 113-120, April 1979, doi: 10.1109/TASSP.1979.1163209.
- [9] Arti Bang, Priti P. Rege, "Recognition of Bird Species from their Sounds using data Reduction Techniques", *ACM international proceeding series, ICCCT-2017*, November 24-26, Allahabad, India, 2017. ISBN: 978-1-4503-5324-3, DOI: 10.1145/3154979.3155002
- [10] Geiger J.T., Schuller B., Rigoll G. (2013) Large-Scale Audio Feature Extraction and SVM for Acoustic Scenes Classification, In: *Applications of Signal Processing to Audio and Acoustics (WASPAA)*, 2013 IEEE Workshop on IEEE
- [11] G.P. Zhang, E.B. Patuwo, Y.H. Michael, Forecasting with artificial neural networks: the state of the art, *Int. J. Forecast.* 14 (1) (1998) 3562
- [12] Ekta Gambhir, Ritika Jain, Alankrit Gupta and Uma Tomer "Regression Analysis of COVID-19 using Machine Learning Algorithms" *Proceedings of the International Conference on Smart Electronics and Communication (ICOSEC 2020) IEEE Xplore Part Number: CFP20V90-ART; ISBN: 978-1-7281-5461-9*