



CHIAROSCURO

A Marp theme in light and shadow
One slide per layout

Contents

1

Fourteen layouts, one slide each

2

Modifiers, named as they come up

3

Nothing here you have to write CSS for

**What is this
subject about?**



Titles go here

Default



The everyday slide: title at the left margin, body hanging to the right of it. `no-indent` pulls the body back, `no-rule` drops the red bar, `centered` centres both, `mirror` moves all three to the other side. A **word** can be picked out of a sentence. And a **test link**.



```
// Code is set in the theme palette, not highlight.js defaults.  
int main() { return 0; }
```

Layout	Takes an image	Title sits
half	on the right half	top left
duo	two, side by side	bottom left
band	one to four	bottom left

Columns

`columns-2` ... `columns-6` set the body of an everyday slide in columns, with the title spanning them and the indent taken off. The same modifier counts text columns on `comparison`, photographs on `trio` and panels on `band` — one name, one variable, four things to count.

The sixth heading level is the eyebrow above: caps, letter-spaced, in the secondary ink. It is the

only place the theme uses capitals other than a cover title.

```
// --fs-code reaches a fence
// a class cannot.
int median(std::vector<int>& v) {
    auto m = v.begin() + v.size() / 2;
    std::nth_element(v.begin(), m, v.end());
    return *m;
}
```

The content **series**

`--red` is the theme's own — the rule under this title, the dash in front of a list row, the bars of `agenda` — and `.accent-1` is that same red under a second name. The four beside it are yours, a ramp running from it to blue:

1 2 3 4 5

No rule in the theme reads one of them, so nothing on any other slide moves if you replace all five. They colour text; for a shape — a bar, a cell, a path of an inline SVG — read `var(--accent-3)` straight.

Maths

An equation set on its own line takes more air above and below than a paragraph does — it is a block the eye stops on, not another row of the argument:

$$T(n) = 2T\left(\frac{n}{2}\right) + O(n) = O(n \log n)$$

Set inline, as $O(b^{d/2})$ is here, it stays inside the line and does not open it. Marp reaches for MathJax unless the deck asks for `math: katex`; the theme spaces the two identically, and `--font-math` is a KaTeX-only knob — MathJax writes outlines, and an outline has no typeface to set.

Half

Title and body on the left half, the right half free for a photo. Write `![bg right]` with no percentage: the split is forced to 50/50, and a different percentage only narrows the text box without moving the photo.



Half, free field

For something other than a photo, wrap it in `<div class="right">`. The field carries no type style of its own; compose it with `symbol`, `red` or `pale` when you want one.

```
// A free field: it takes a code
// block, a list, a table, an
// inline SVG – whatever you put
// in the div.
int main() {
    return 0;
}
```

Half, few glyphs

The same field at the top of the scale. **symbol** is the display step, 384 px, and the name is the instruction: a few glyphs or a number, never a sentence. **pale** takes it down to a tint of the page.

Together they turn the subject of the slide into the illustration of it — something to look at while the body is read, rather than one more thing to read.

o(n)



placeholder text

Half, mirrored

Nothing to switch on: write `![bg left]` and the layout follows the photo. The title and its rule move to the outer edge, the body keeps its ranging and hugs the same one. For a field rather than a photo, say it yourself with `<div class="left">`.


Where a side is a real choice and no photo implies it, that is what `mirror` is for: it flips `split`, `comparison`, `board` and the everyday slide.

Side


Same idea as **half**, with the whole block dropped to the middle of the page. Bullets come out as dashes:

- first point
- second point
- third point



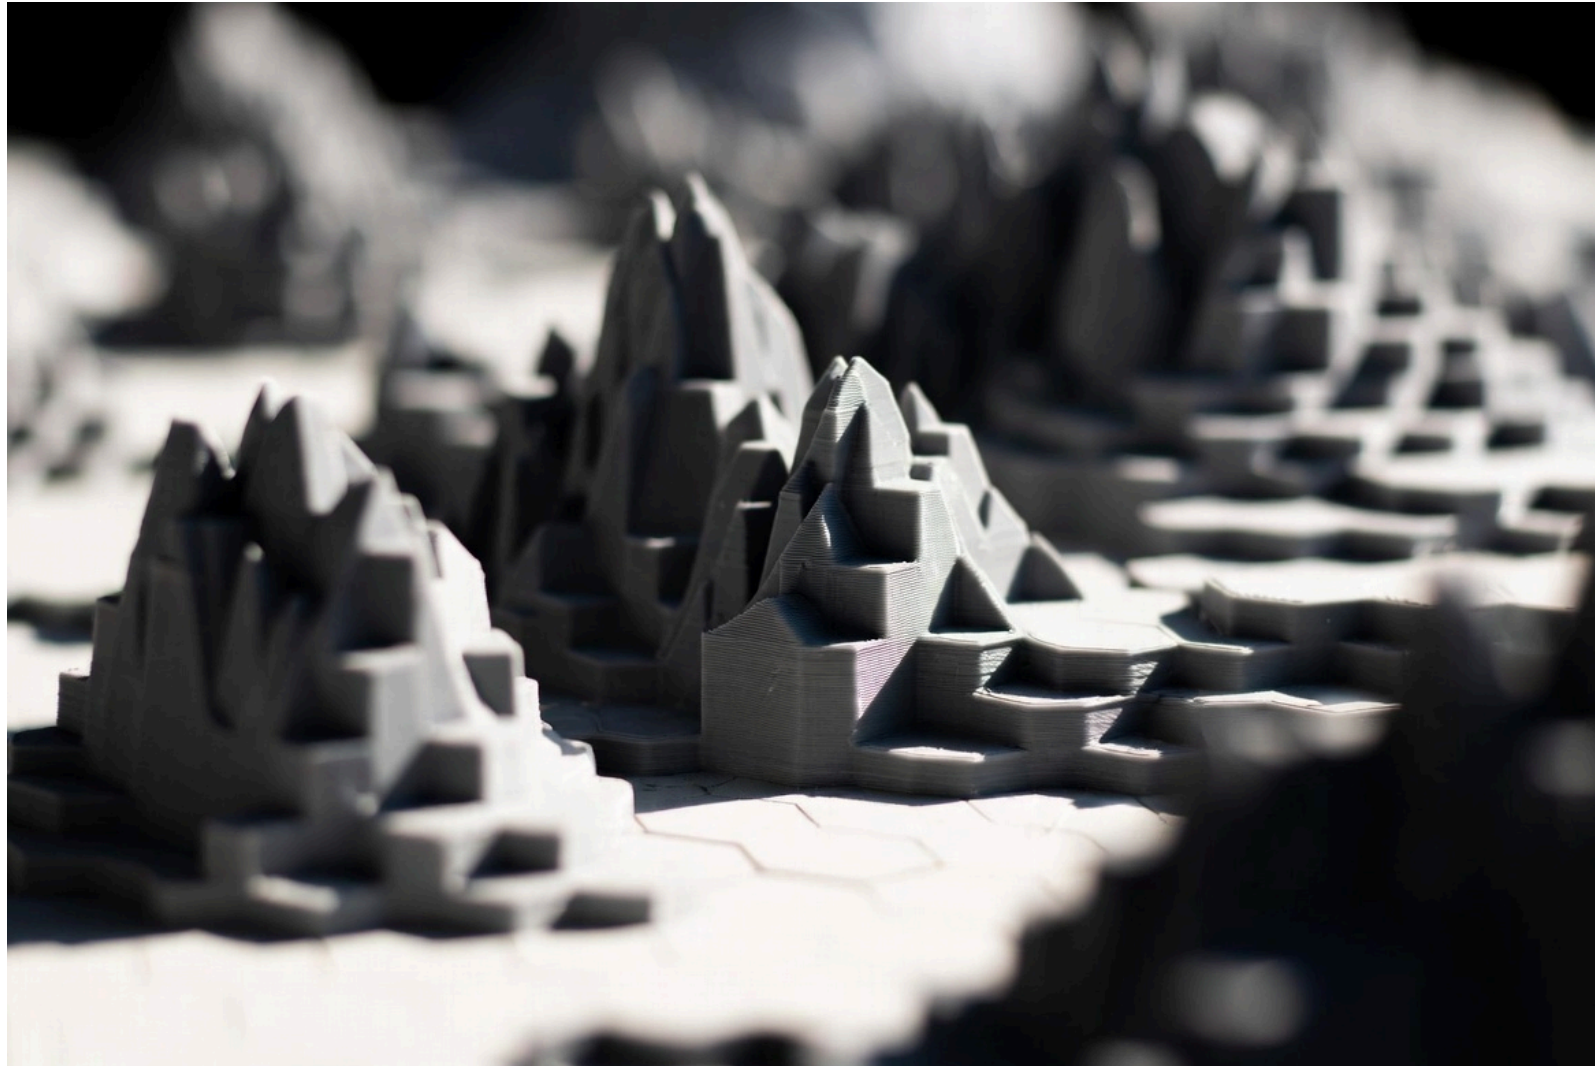

Something in **light**

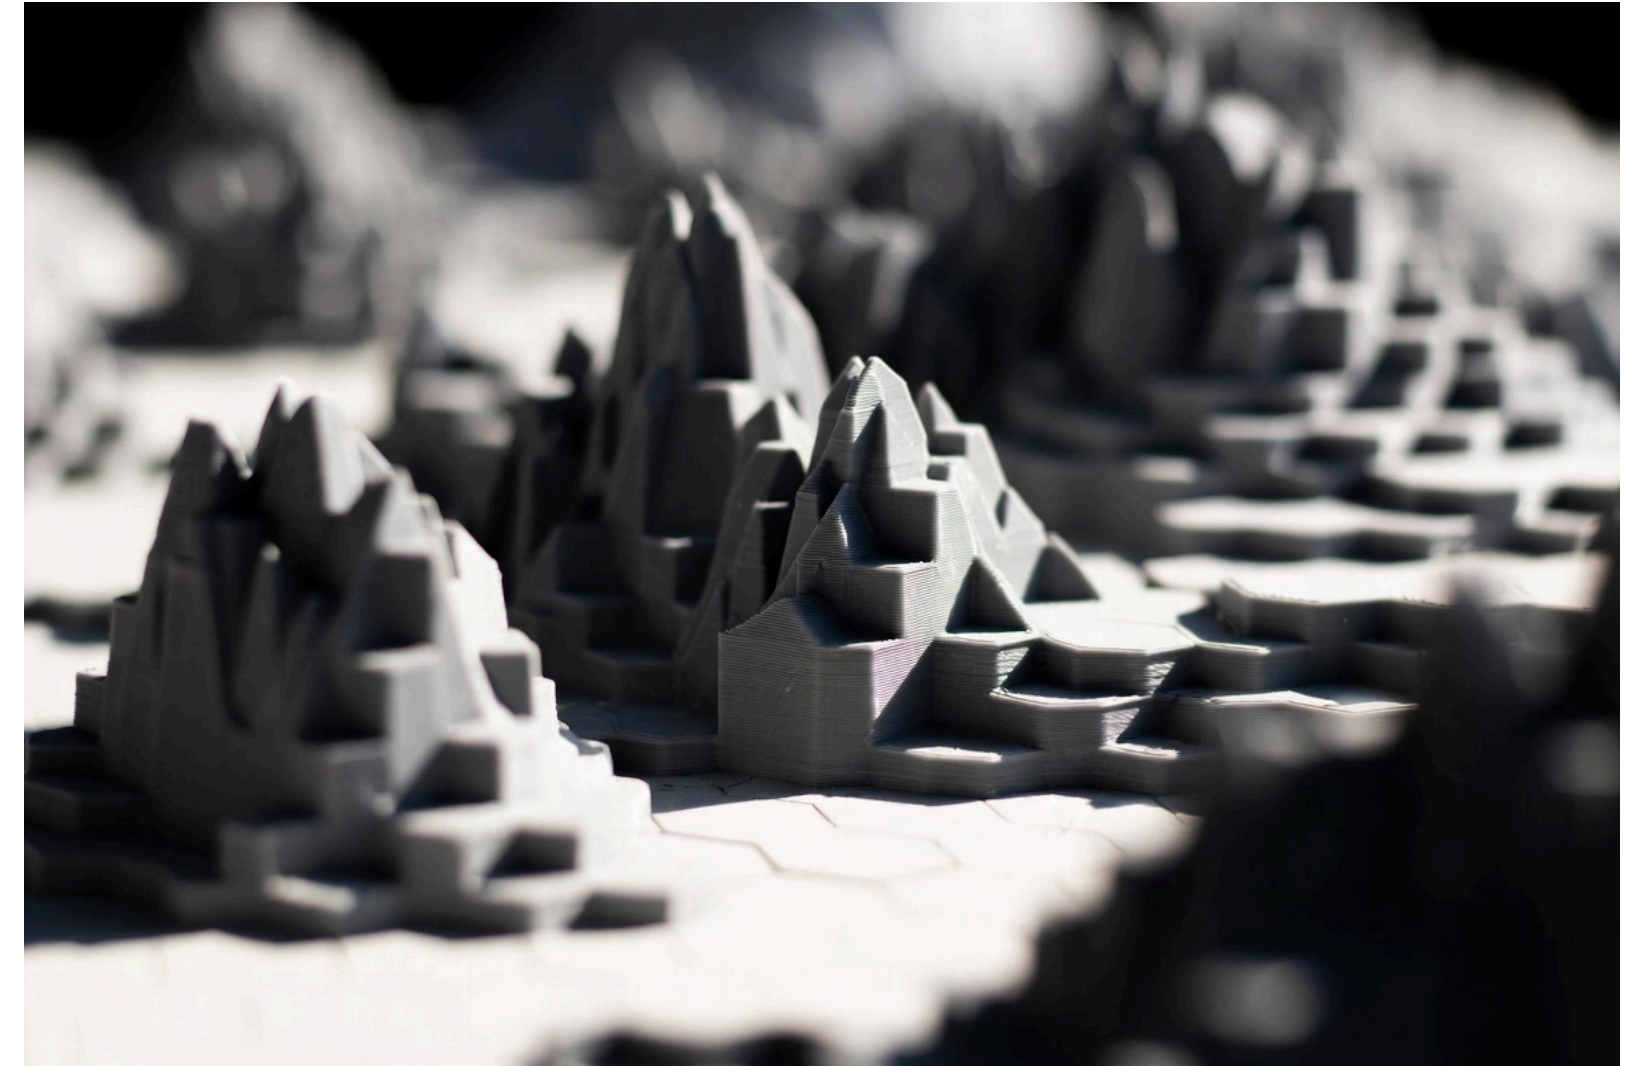

Something in **shadow**

Duo

Two photos, a rule and a caption each. The line beside the title is an `h2`, and it lands in the bottom strip whatever order you write it in.



First



Second



Third

Trio

Three photos in a row, written the same way as `duo`. With `columns-2` the photos widen and their rules follow.

Band

A full-bleed band of image across the top, and the same footing as **duo** and **trio** below it. With **columns-2** ... **columns-4** the band is shared edge to edge, with no gutter.

Image

Light

Columns hang from a full-bleed line, with a dot each. Two of them by default — write one h3 per column, then its text and its list.

- code in a list
- comes out underlined

Shadow

The h1 goes last and lands at the **bottom left**, with its rule bleeding off that edge — the same corner as every other title in the theme.

- a point
- another one

Comparison

An `h2` lands beside the title, in the same strip `duo`, `trio` and `band` use.

One

`columns-3` ... `columns-6`
for more than two.

- a point
- another one

Two

The gutter stays at
70.5 px throughout.

- fixed
- gutter

Three

Only the column
width is recomputed.

- width
- scales

Four

Past four, prefer bare
lists to prose. This slide
is **mirror**ed, so the
title is on the right.

- terse
- items

Four columns

Edge

left and right

top and bottom

Borrowed from

the left margin of **half**, and its mirror

the band of photograph on **band**

Board

One free field, with the title of **comparison** under it and an **h2** beside it. The table keeps its own width — **wide** would stretch it to the field's.

Dark

`dark` turns any layout black. It has no rules of its own: the page, the ink, the code panel, the rules of a table and the slide number are all one set of variables, redefined once.

```
// The listing is recoloured by the palette, not by a second theme.  
std::vector<int> v{3, 1, 2}; // strings and numbers shift with it  
std::sort(v.begin(), v.end());
```

Reads	From
the panel	<code>--pre-bg</code>
the table rule	<code>--gray-rule</code>

Light

What the deck says out loud.

Shadow

What it leaves for the room to fill in.

chiaroscuro