



Module 2: Case Study - 1

1. Launched Linux instance in the US-East-1 (N. Virginia) region.

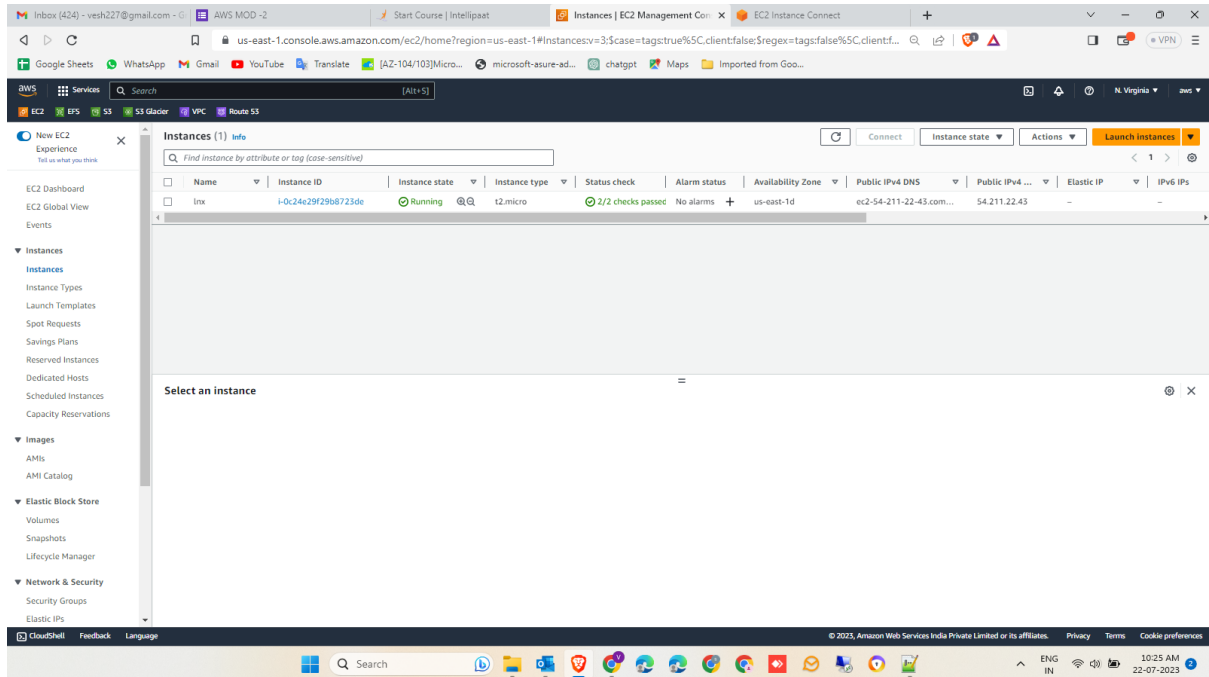


2. Took AMI out of it from the Linux instance.

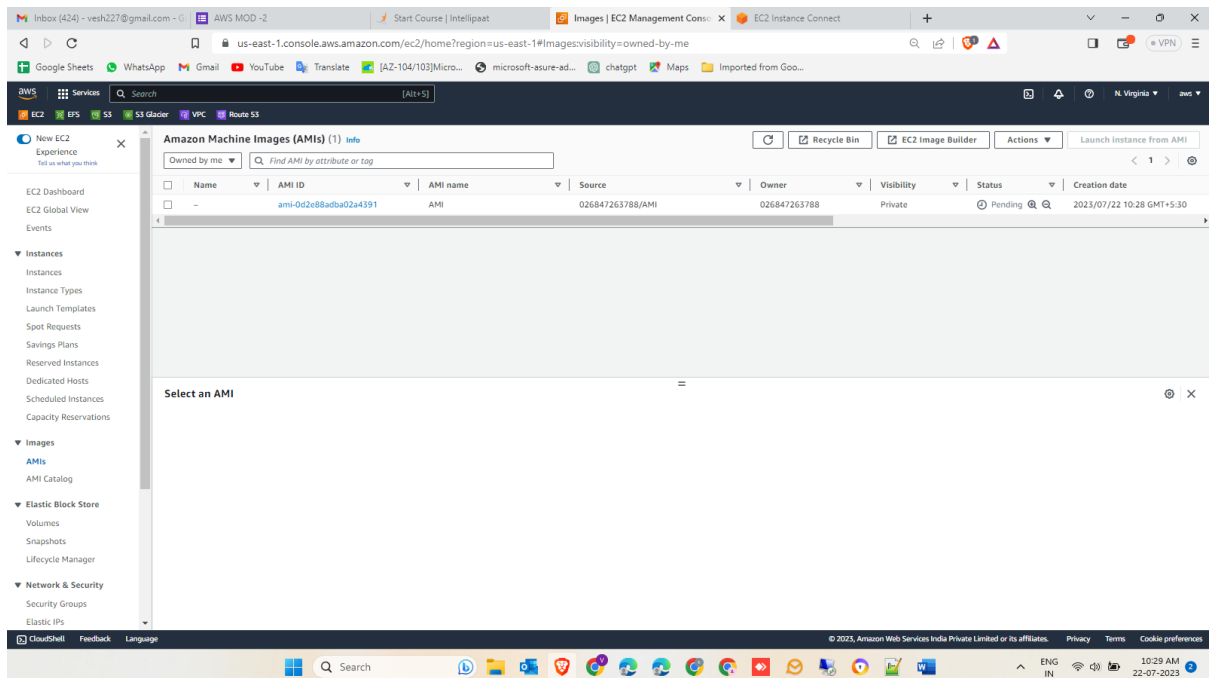


Module 2: Case Study - 1

3. Copy AMI.

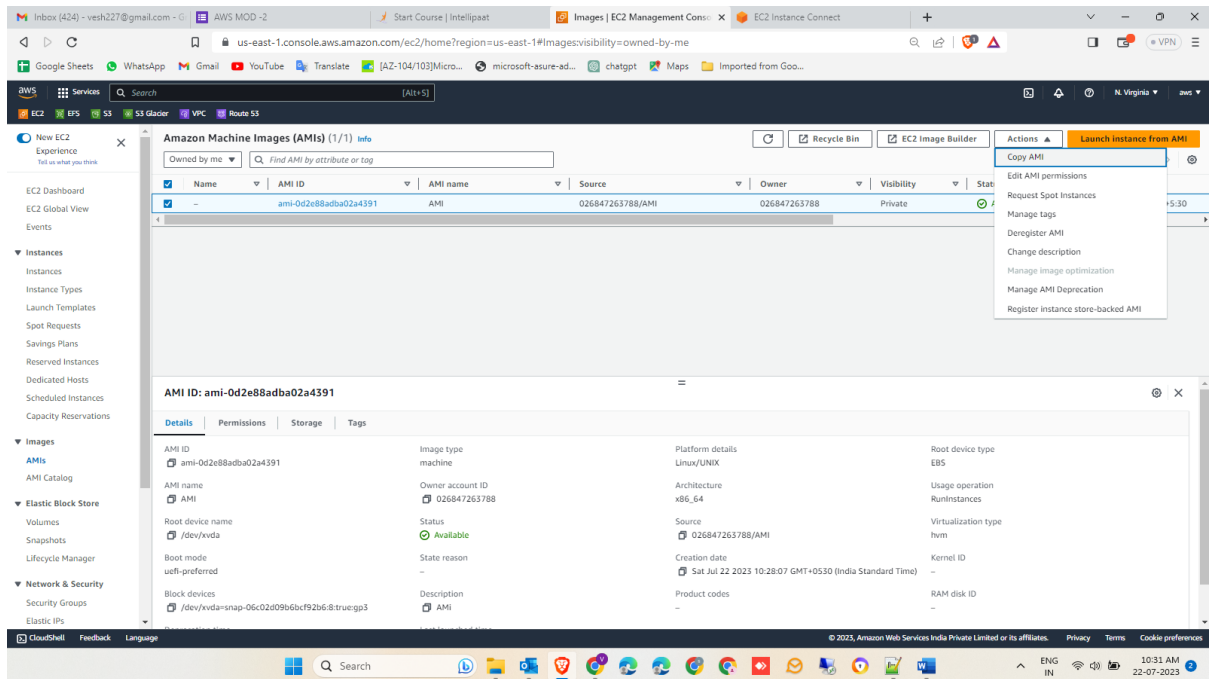


4. Copied AMI launched to Oregon Region.

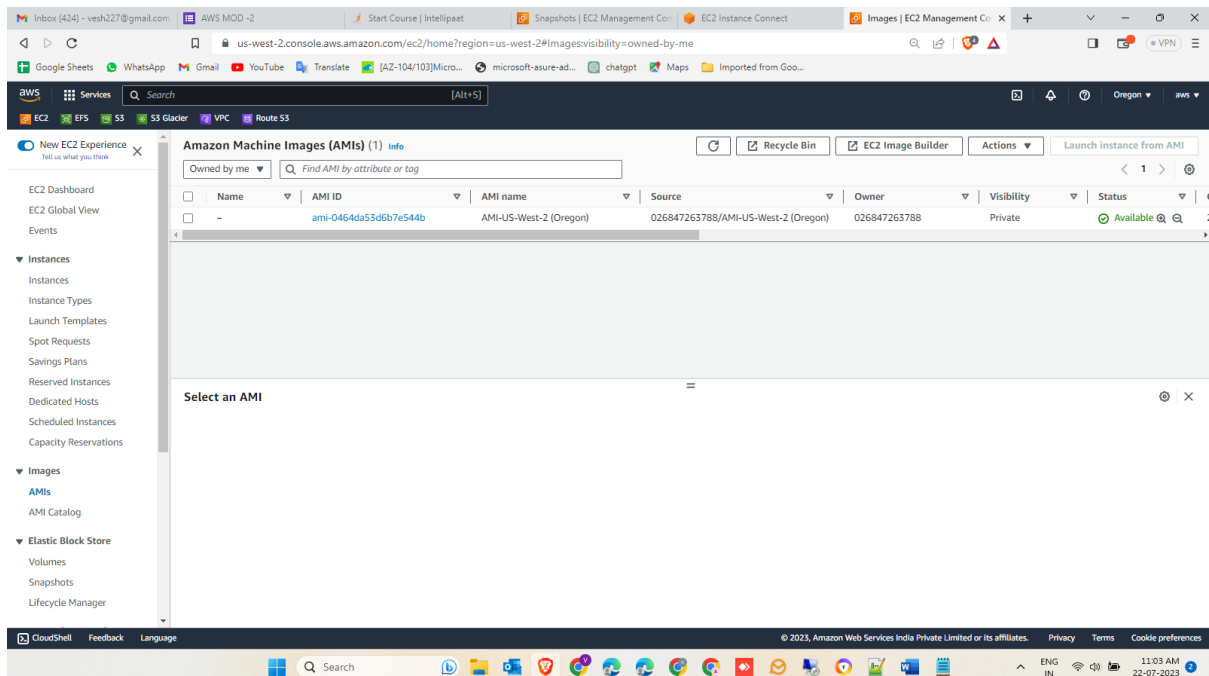


Module 2: Case Study - 1

5. Launched instance from the AMI (Oregon).

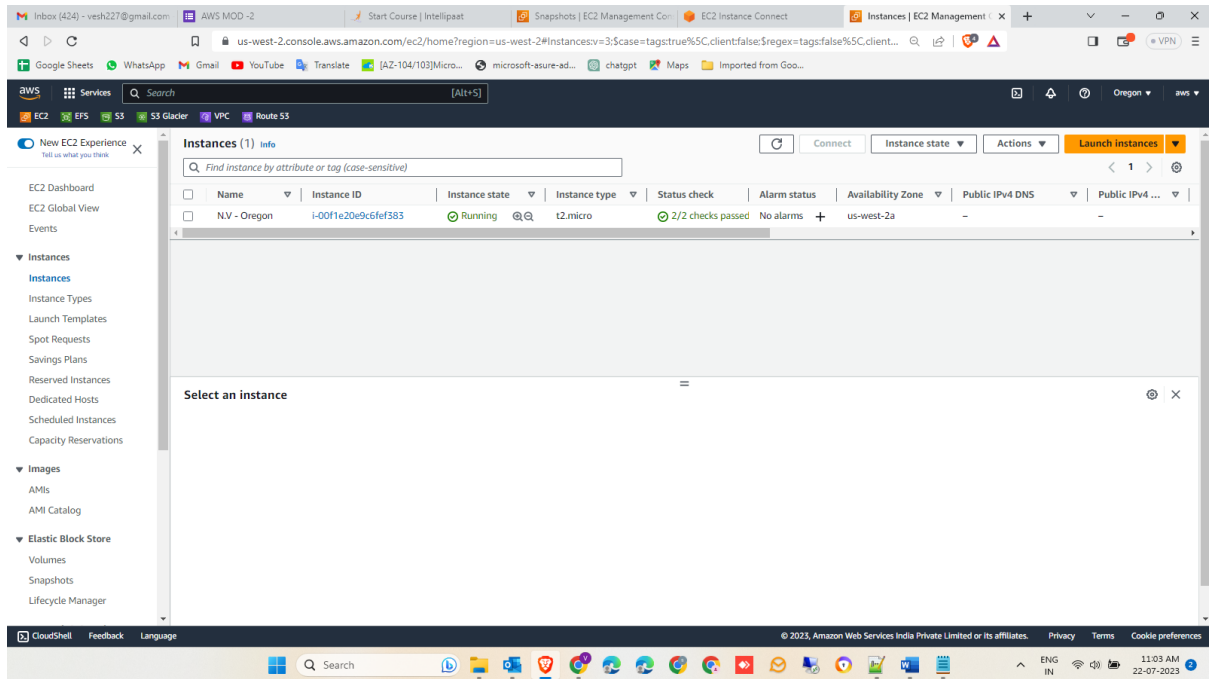


6. Go back to the N.Virginia. Created 2 volumes(1 GB).

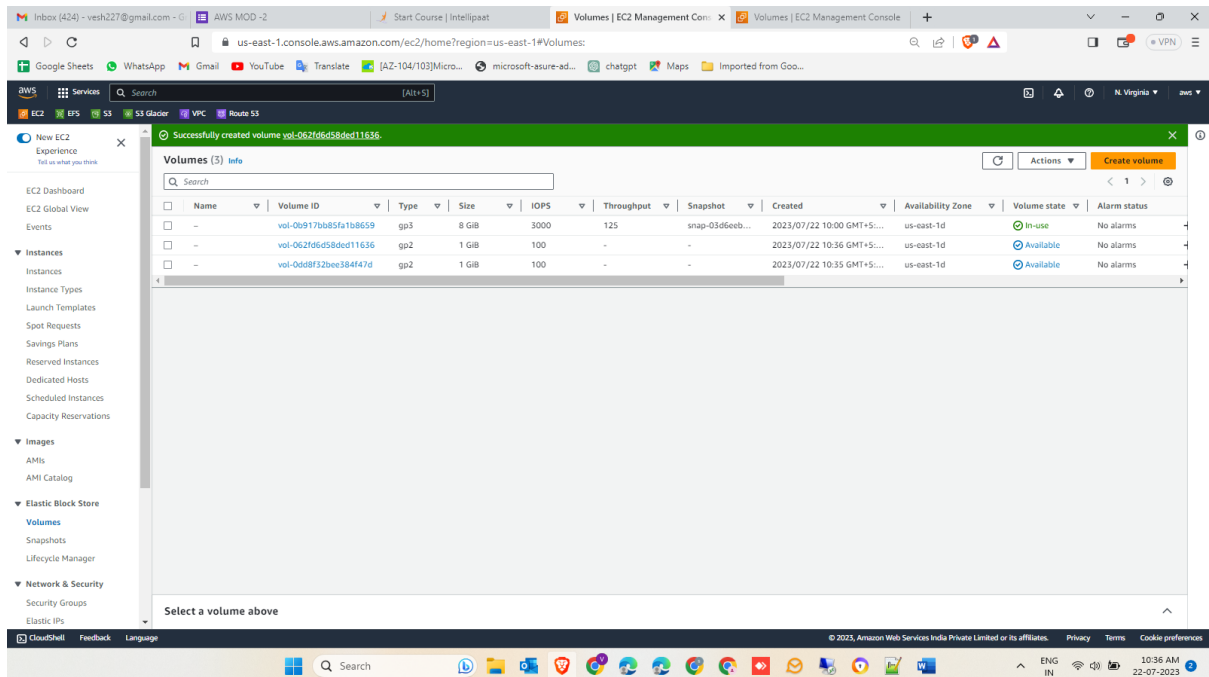


Module 2: Case Study - 1

7. Both volumes(xvdf, xvdg) mounted to the Linux machine.

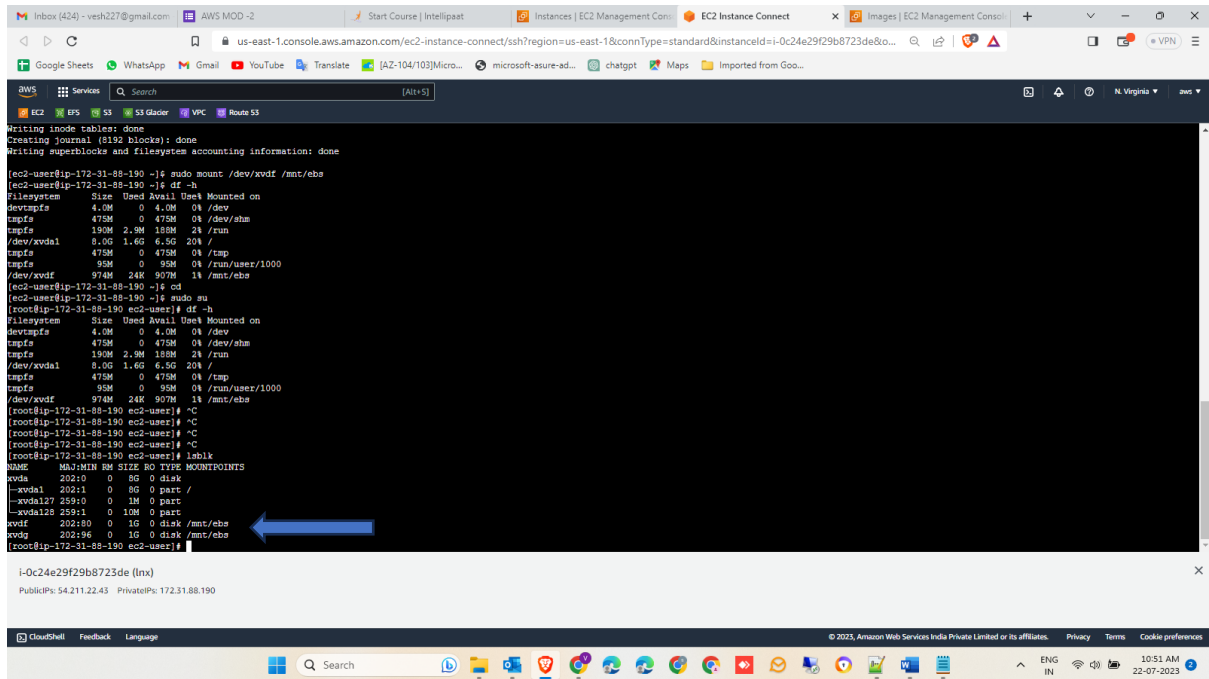


8. Detached one volume(xvdf).

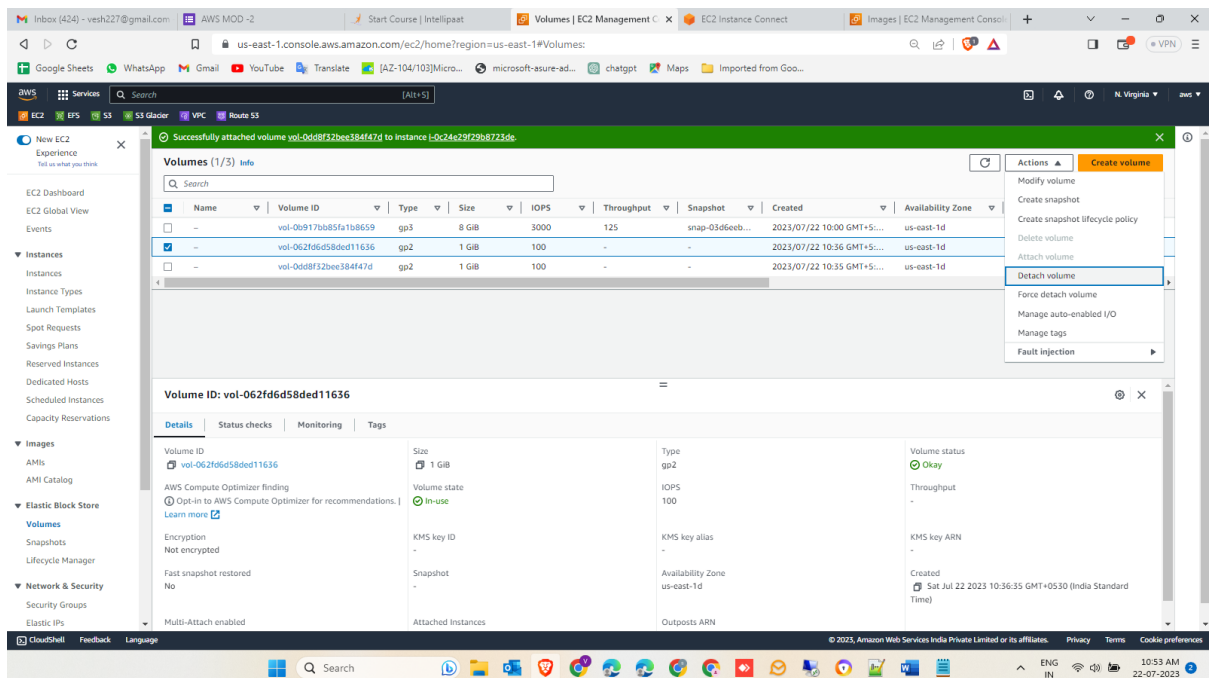


Module 2: Case Study - 1

9. Deleted the detached volume(xvdf).

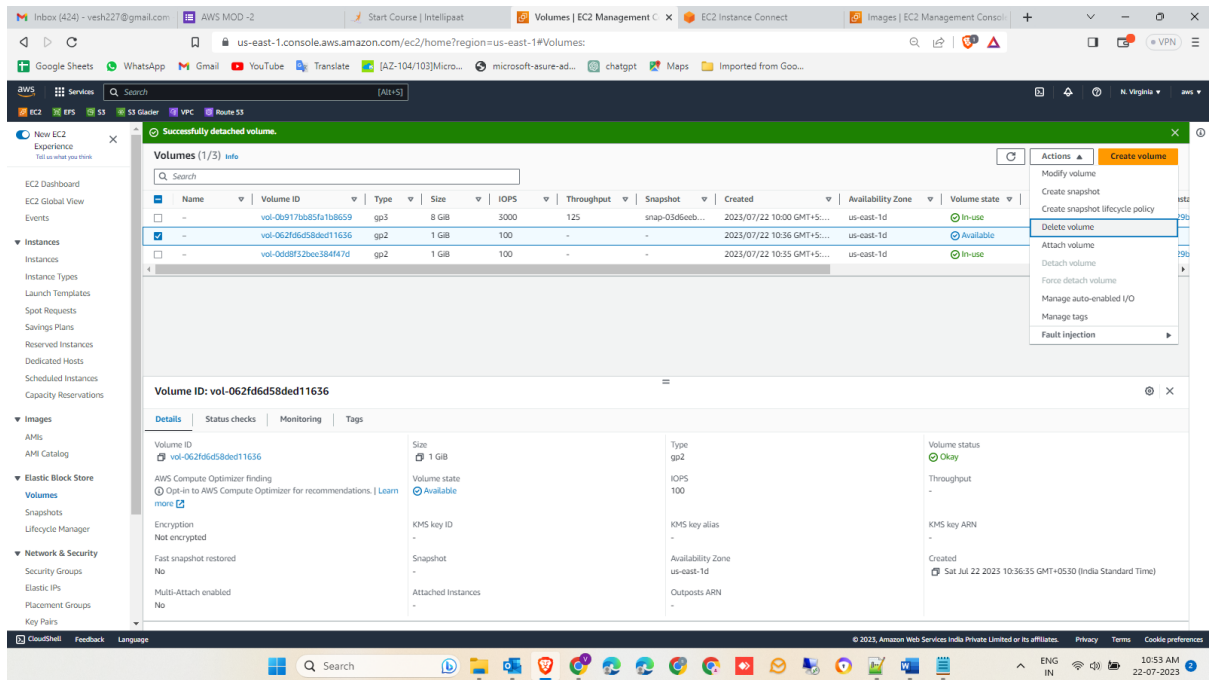


10. Go back to the Linux machine. Enter lsblk. Only one attached volume(xvda) is there another one(xvdf) has been deleted.

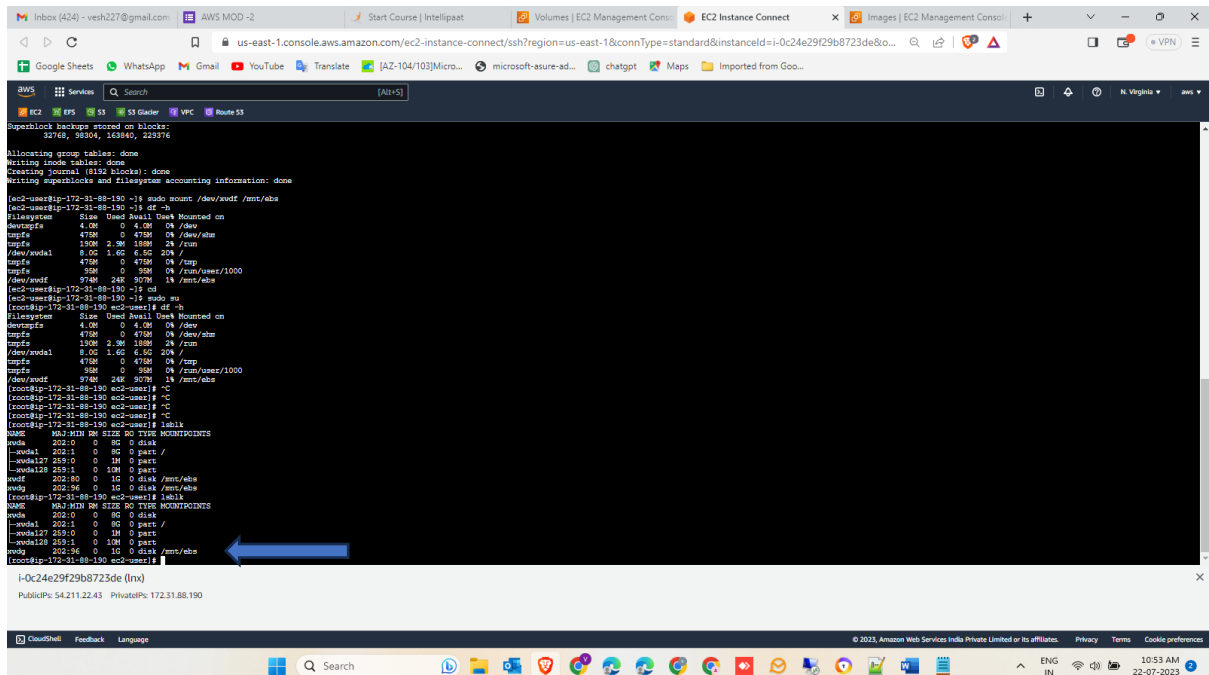

Module 2: Case Study - 1

11. Extended the size(2GB) of attached volume.

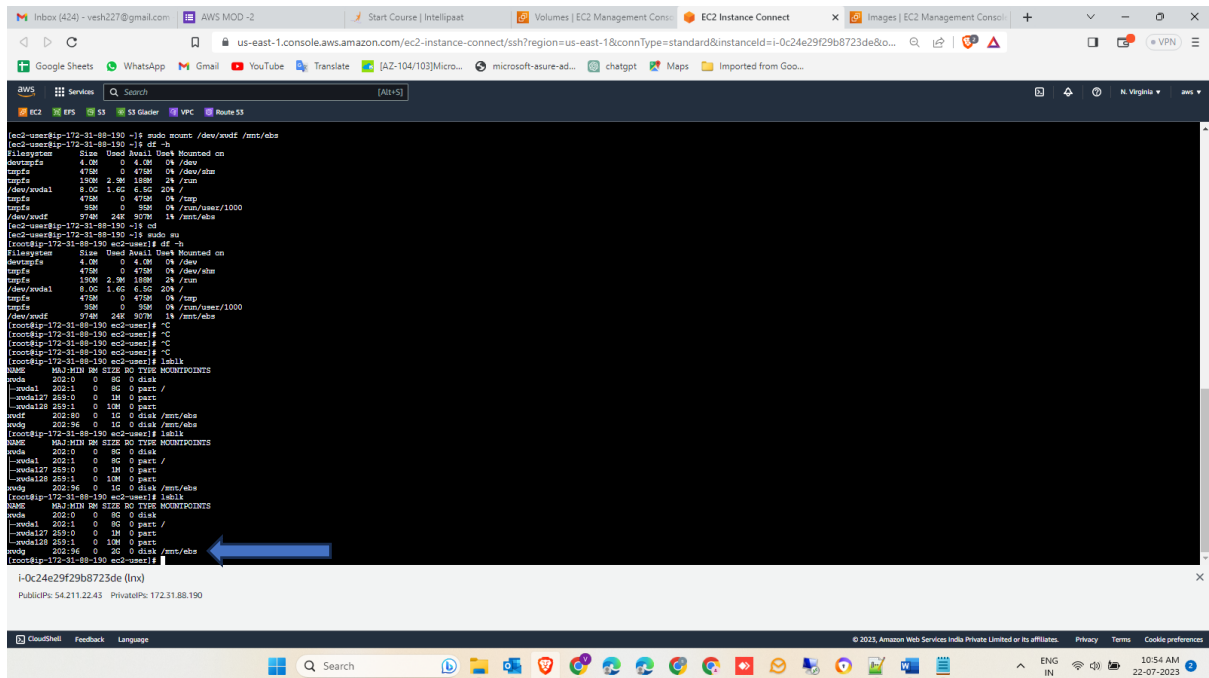

12. I took backup of this EBS Volume.

