


EXAMEN PRÁCTICO MÓDULO 1

En esta práctica, debe crear su propio servidor web.


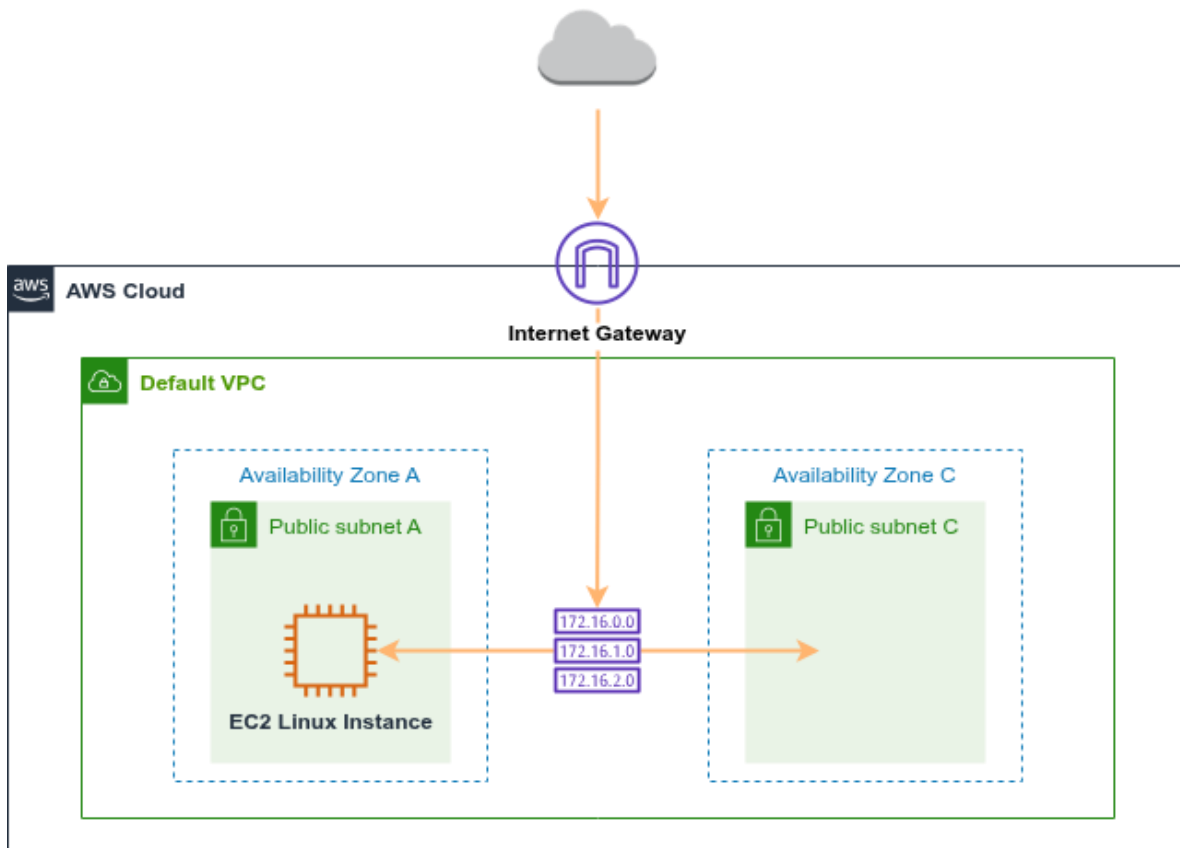


Realice el examen en el siguiente orden:

1. Crear un par de claves nuevo
2. Lanzar una instancia de servidor web
3. Conectarse a la instancia de Linux via SSH
4. Crear un EBS con TAGS y asociarlo a la instancia
5. Crear un bucket (S3) con TAGs y subir un archivo .TXT básico
6. Subir las evidencias a su repositorio de GitHub

1. Crear un par de claves (keypair) nuevo .pem

Indispensable para poder conectarse a la instancia

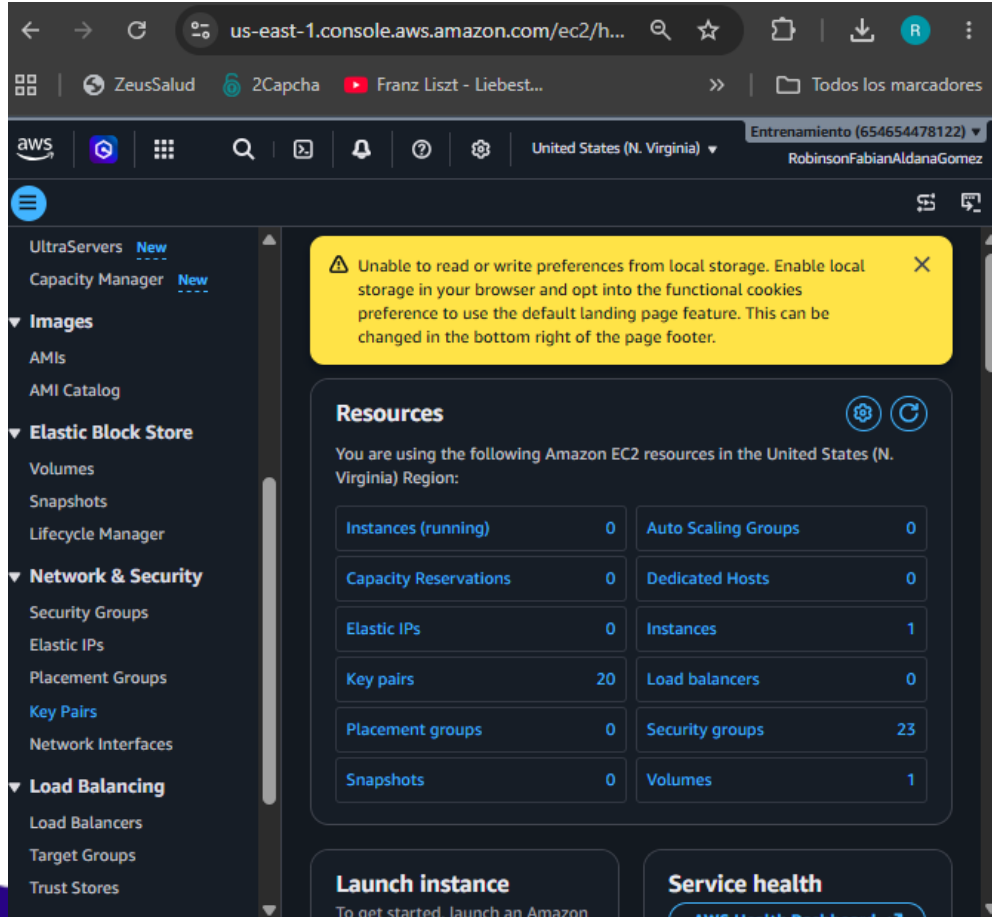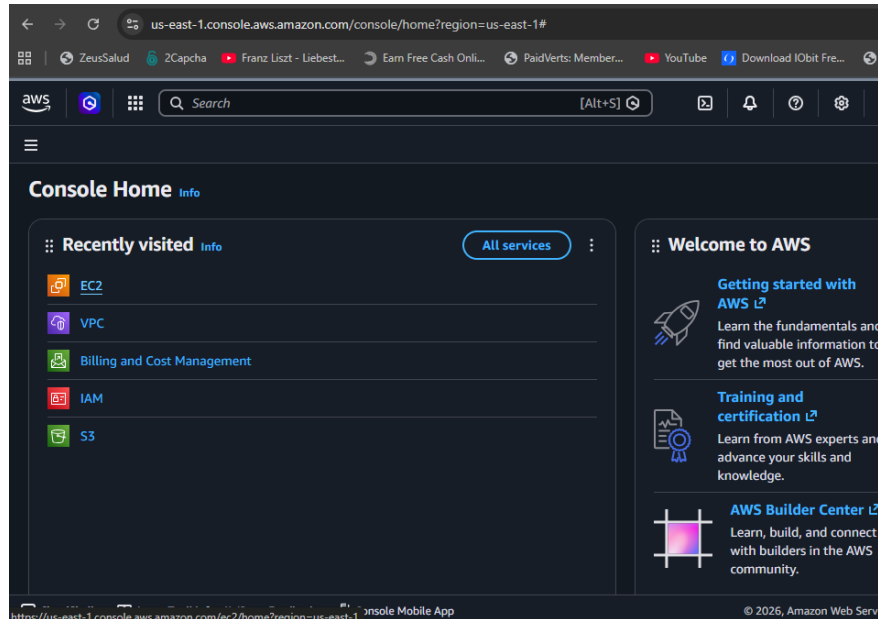

Create key pair Info

Key pair

A key pair, consisting of a private key and a public key, is a set of security credentials that you use to prove your identity when connecting to an instance.

Name

The name can include up to 255 ASCII characters. It can't include leading or trailing spaces.

Key pair type Info

☒ RSA ☐ ED25519

Private key file format

☒ .pem
For use with OpenSSH


☐ .ppk
For use with PuTTY

Tags - optional

No tags associated with the resource.

[Add new tag](#)

You can add up to 50 more tags.

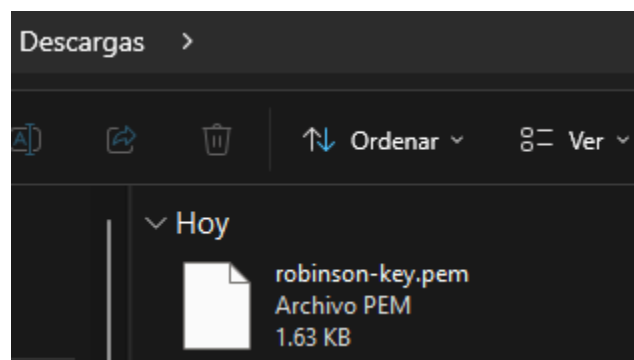

2. Lanzar una instancia de servidor web

IMPORTANTE: Compruebe la VPC predeterminada y la subred. Auto-assign public IP (Asignar automáticamente la IP pública) está configurada en **Enable (Habilitar)**. Justo debajo, crea grupos de seguridad para que actúen como un firewall de la red. Para el grupo de seguridad que está creando en este momento, habilite el tráfico para el puerto 22 desde su servidor y el 80 desde cualquier origen:

Puerto : 22 Seleccionará My IP

Puerto 80: Escribe 0.0.0.0/0

Para todo lo demás, acepte los valores predeterminados.

Ingrese los siguientes valores en el campo **Datos de usuario (User Data)** en la parte **de lanzar instancia en avanzado** :

```
#!/bin/bash

# Update system
dnf update -y

# Install required packages
dnf install -y httpd wget php php-fpm php-mysqli php-json php-devel
php-mbstring mariadb105 unzip

# Enable and start Apache
systemctl enable httpd
systemctl start httpd

# Install web app
cd /var/www/html

if [ ! -f immersion-day-app-php7.zip ]; then
    Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina
    701.
    Medellín, Colombia
```

```
wget -O immersion-day-app-php7.zip
https://static.us-east-1.prod.workshops.aws/public/0cf8e0cc-9aa4-41b3-aa
e7-ea46d24b239e/assets/immersion-day-app-php7.zip

unzip immersion-day-app-php7.zip

fi

# Install AWS SDK

if [ ! -d /var/www/html/vendor ]; then


    mkdir vendor

    cd vendor

    wget https://docs.aws.amazon.com/aws-sdk-php/v3/download/aws.zip

    unzip aws.zip

fi
```

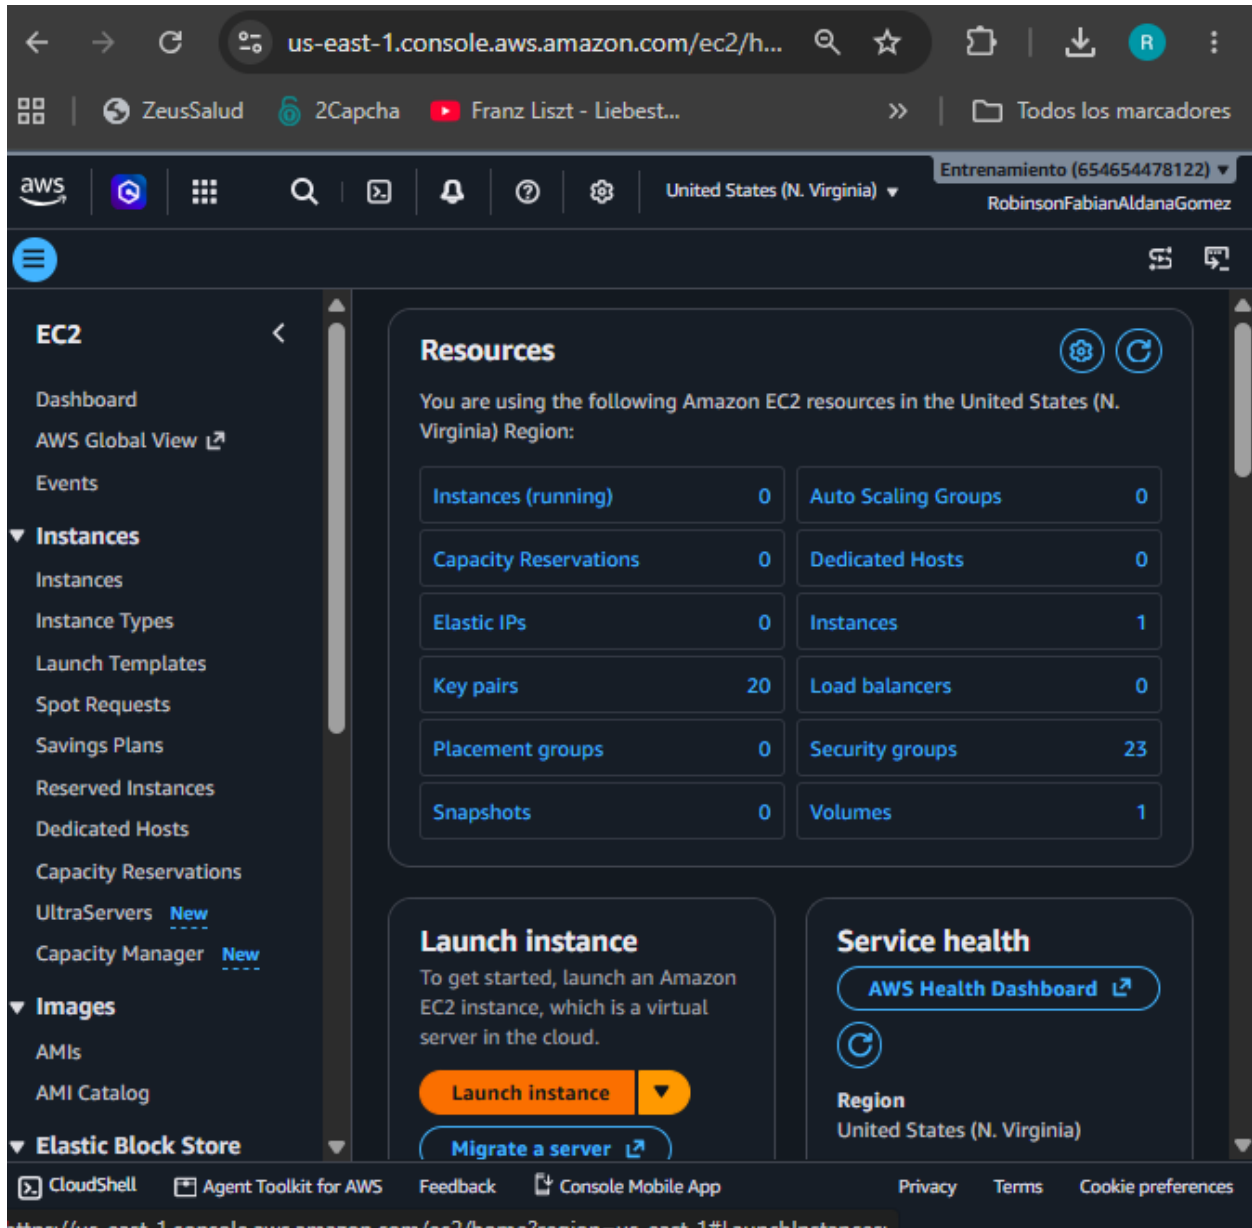

The screenshot displays the AWS Management Console for the 'us-east-1' region. The left sidebar shows the navigation menu with categories like EC2, Images, and Elastic Block Store. The main content area is titled 'Resources' and lists various EC2 resources and their counts. Below this, there are sections for 'Launch instance' and 'Service health'.

Resource	Count
Instances (running)	0
Capacity Reservations	0
Elastic IPs	0
Key pairs	20
Placement groups	0
Snapshots	0
Auto Scaling Groups	0
Dedicated Hosts	0
Instances	1
Load balancers	0
Security groups	23
Volumes	1

Launch instance
To get started, launch an Amazon EC2 instance, which is a virtual server in the cloud.
[Launch instance](#)


Service health
[AWS Health Dashboard](#)
Region: United States (N. Virginia)

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la

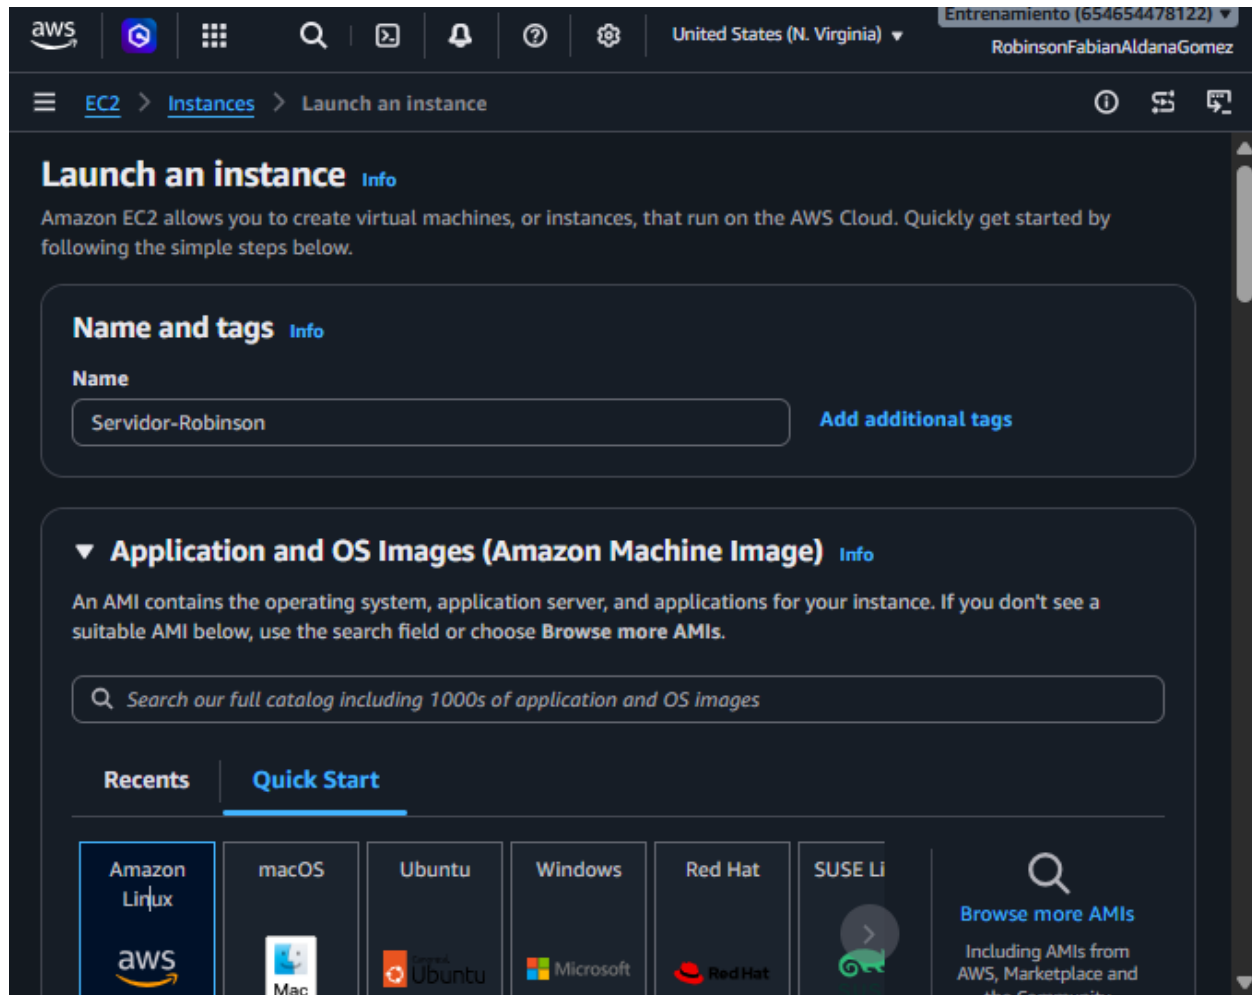

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name

Servidor-Robinson [Add additional tags](#)

▼ **Application and OS Images (Amazon Machine Image)** [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Recents **Quick Start**

 Amazon Linux	 macOS	 Ubuntu	 Windows	 Red Hat	 SUSE LI	 Browse more AMIs Including AMIs from AWS, Marketplace and Amazon Community AMIs
---	--	---	--	--	--	--

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la

Recents

Quick Start

Amazon Linux

aws

macOS

Mac

Ubuntu

Canonical Ubuntu

Windows

Microsoft

Red Hat

Red Hat

SUSE Li

SUSE Linux

Q

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.18 AMI

Free tier eligible

ami-0b245cc5f82576748 (64-bit (x86), uefi-preferred) / ami-00f80eba068753881 (64-bit (Arm), uefi)

Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Amazon Linux 2023 (kernel-6.18) is a modern, general purpose Linux-based OS that will be supported until June 2029. It is optimized for AWS and designed to provide a secure, stable and high-performance execution environment to develop and run your cloud applications.

Amazon Linux 2023 AMI 2023.12.20260928.0 x86_64 HVM kernel-6.18

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la










United States (N. Virginia)
Entrenamiento (654654478122)
RobinsonFabianAldanaGomez

EC2

Instances

Launch an instance

2029. It is optimized for AWS and designed to provide a secure, stable and high-performance execution environment to develop and run your cloud applications.

Amazon Linux 2023 AMI 2023.12.20260928.0 x86_64 HVM kernel-6.18

Architecture	Boot mode	AMI ID	Creation Date	Username
64-bit...	uefi-preferred	ami-0b245cc5f82576748	2026-09-24	ec2-user

Verified provider

▼ Instance type

Info | Get advice

Instance type

t3.micro
Family: t3 2 vCPU 1 GiB Memory Current generation: true
On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour
On-Demand RHEL base pricing: 0.0392 USD per Hour

Free tier eligible

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

▼ Key pair (login)

Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

robinson-key

Create new key pair

▼ Network settings

Info

VPC - required

Info

vpc-0b53ba6f921095c2b

(default) ▼

↻

172.31.0.0/16

Subnet

Info

No preference ▼

↻ Create new subnet ↗

Availability Zone

Info

No preference ▼

↻ Enable additional zones ↗

Auto-assign public IP

Info

Enable ▼

Additional charges apply ↗ when outside of free tier allowance ↗

Firewall (security groups)

Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group

☐ Select existing security group

Security group name - required

launch-wizard-6

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and . _ - / () # . @ [] + = & ; () ! \$ *

Description - required

Info

launch-wizard-6 created 2026-09-30T01:16:20.550Z

CloudShell

Agent Toolkit for AWS

Feedback

Console Mobile App

Privacy

Terms

Cookie preferences

© 2026 Amazon Web Services, Inc. or its affiliates

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la

Description - **required**
Info

launch-wizard-6 created 2026-09-30T01:16:20.550Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 186.28.79.36/32)
Remove

Type
Info

ssh
▼

Protocol
Info

TCP

Port range
Info

22

Source type
Info

My IP
▼

Name
Info

Add CIDR, prefix list or security g

186.28.79.36/32 ✕

Description - **optional**
Info

e.g. SSH for admin desktop

▼ Security group rule 2 (TCP, 80, 0.0.0.0/0)
Remove

Type
Info

HTTP
▼

Protocol
Info

TCP

Port range
Info

80

Source type
Info

Anywhere
▼

Source
Info

Add CIDR, prefix list or security g

0.0.0.0/0 ✕

Description - **optional**
Info

e.g. SSH for admin desktop

⚠ Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security
✕

CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
Privacy
Terms
Cookie preferences

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la

User data - optional [Info](#)

Upload a file with your user data or enter it in the field.

 Choose file

```
#!/bin/bash
# Update system
dnf update -y
# Install required packages
dnf install -y httpd wget php php-fpm php-mysql php-json php-devel
php-mbstring mariadb105 unzip
# Enable and start Apache
systemctl enable httpd
systemctl start httpd
# Install web app
cd /var/www/html
if [ ! -f immersion-day-app-php7.zip ]; then
  wget -O immersion-day-app-php7.zip https://static.us-east-
  1.prod.workshops.aws/public/0cf8e0cc-9aa4-41b3-aae7-
  ea46d24b239e/assets/immersion-day-app-php7.zip
```

☐ User data has already been base64 encoded

▼ Summary

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina
701.

Medellín, Colombia

Summary

Number of instances

Info

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.12.....read more

ami-0b245cc5f82576748

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Free tier: In your first year of opening an AWS account, you get 750 hours per month of t2.micro instance usage (or t3.micro where t2.micro isn't available) when used with free tier AMIs, 750 hours per month of public IPv4 address usage, 30 GiB of EBS storage, 2 million I/Os, 1 GB of snapshots, and 100 GB of bandwidth to the internet. Data transfer charges are not included as part of the free tier allowance. Charges may apply depending on your account's free tier status.

Cancel

Launch instance

Preview code

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina
701.

Medellín, Colombia


Success
 Successfully initiated launch of instance (i-09221510d644f571a)

▶ Launch log

Next Steps

< 1 2 3 4 5 6 7 8 >

Create billing and free tier usage alerts

To manage costs and avoid surprise bills, set up email notifications for billing and free tier usage thresholds.

Create billing alerts ↗

Connect to your instance

Once your instance is running, log into it from your local computer.

Connect to instance ↗
[Learn more ↗](#)

Connect an RDS database

Configure the connection between an EC2 instance and a database to allow traffic flow between them.

Connect an RDS database ↗
[Create a new RDS database ↗](#)
[Learn more ↗](#)

Create EBS snapshot policy

Manage detailed

Create Load Balancer

CloudShell
 Agent Toolkit for AWS
 Feedback
 Console Mobile App
 Privacy
 Terms
 Cookie preferences

© 2026 Amazon Web Services, Inc. or its affiliates


☐	andres-pinzon	i-02823faf036ae812c	Running			t3.mic
☐	Servidor-Robi...	i-09221510d644f571a	Running			t3.mic

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la

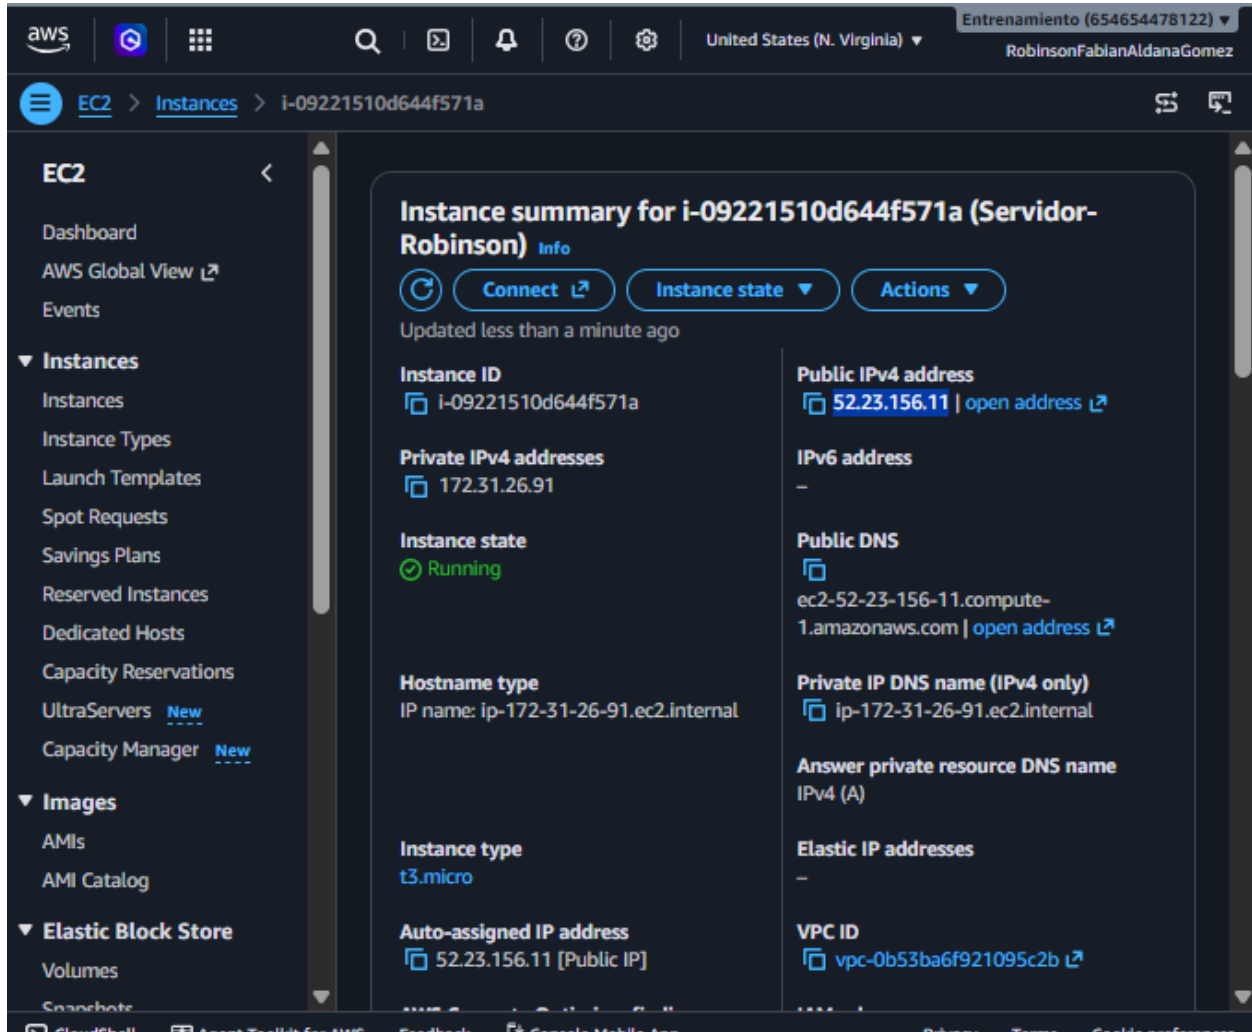

The screenshot displays the AWS Management Console interface for an EC2 instance. The left sidebar shows the navigation menu with categories like EC2, Images, and Elastic Block Store. The main content area shows the 'Instance summary for i-09221510d644f571a (Servidor-Robinson)'. The instance is in a 'Running' state. Key details include the Instance ID, Public IPv4 address (52.23.156.11), Private IPv4 addresses (172.31.26.91), Hostname type (IP name: ip-172-31-26-91.ec2.internal), Instance type (t3.micro), Auto-assigned IP address (52.23.156.11 [Public IP]), and VPC ID (vpc-0b53ba6f921095c2b).


Property	Value
Instance ID	i-09221510d644f571a
Public IPv4 address	52.23.156.11 open address
Private IPv4 addresses	172.31.26.91
IPv6 address	-
Instance state	Running
Public DNS	ec2-52-23-156-11.compute-1.amazonaws.com open address
Hostname type	IP name: ip-172-31-26-91.ec2.internal
Private IP DNS name (IPv4 only)	ip-172-31-26-91.ec2.internal
Answer private resource DNS name	IPv4 (A)
Instance type	t3.micro
Elastic IP addresses	-
Auto-assigned IP address	52.23.156.11 [Public IP]
VPC ID	vpc-0b53ba6f921095c2b

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la

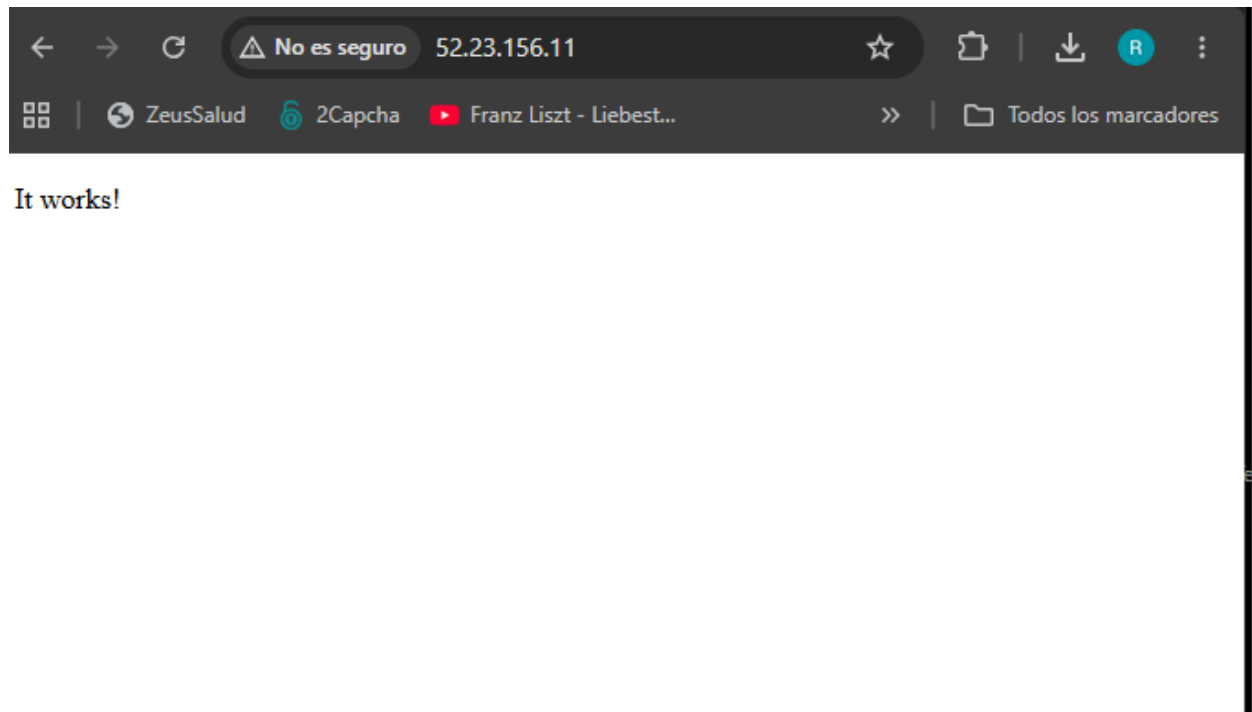


3. Conectarse a la instancia vía SSH si hace falta comprobar algún servicio

[illegible]

[illegible]

4. Crear un EBS con TAGS y asociarlo a la instancia, máximo de 3GiB

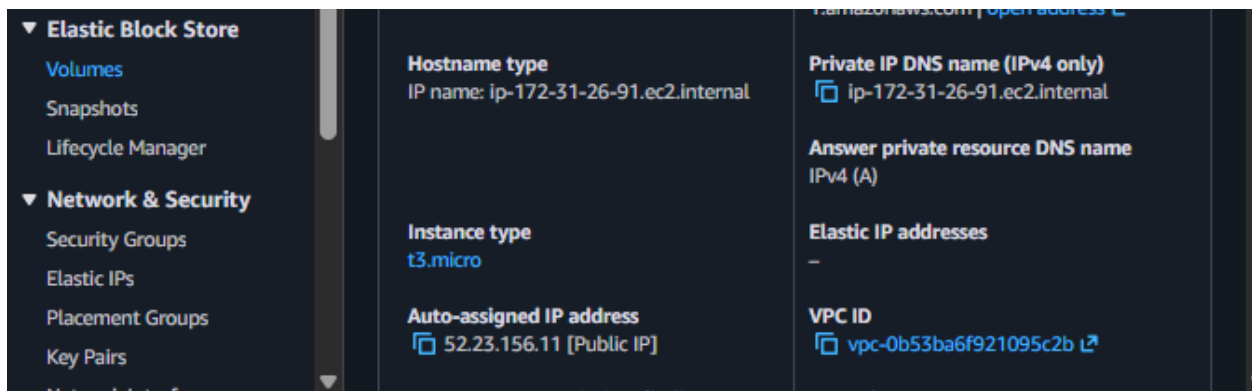

Volumes (27) Info

Last updated less than a minute ago

Recycle Bin

Actions

Create volume

Saved filter sets

Choose filter set

Search

< 1 >

	Name	Volume ID	Type	Size
☐		vol-02fb734d5161febbd	gp3	8 GiB
☐		vol-01c2ce07f52f3a257	gp3	8 GiB
☐		vol-081e8da9ef95eee63	gp3	3 GiB

Fault tolerance for all volumes in this Region

Snapshot summary

Last updated on Tue, Sep 29, 2026, 08:58:16 PM (GMT-05:00)

Snapshots to back up volumes can be manually created, or created through automation such as Amazon Data Lifecycle Manager, AWS Backup, custom scripts, or third-party tools.

Volumes backed up in the last 24 hours / Total # volumes

0 / 27

Data Lifecycle Manager default policy for EBS Snapshots status

No default policy set up | Create policy

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

www.betek.la

@betek.la

[EC2](#) > [Volumes](#) > Create volume

Volume settings

Volume type | [Info](#)

General Purpose SSD (gp3)

Size (GiB) | [Info](#)

3

Min: 1 GiB, Max: 65536 GiB.

IOPS | [Info](#)

3000

Min: 3000 IOPS, Max: 80000 IOPS.

Throughput (MiB/s) | [Info](#)

125

Min: 125 MiB, Max: 2000 MiB, Baseline: 125 MiB/s.

Availability Zone | [Info](#)

use1-az4 (us-east-1c)

Snapshot ID - optional | [Info](#)

Don't create volume from a snapshot

Encryption | [Info](#)

Use Amazon EBS encryption as an encryption solution for your EBS resources associated with your EC2 instances.

☐ Encrypt this volume

Tags - optional

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.


Key	Value - optional	
name	EBS-Robinson	Remove

Add new tag

You can add up to 49 more tags.

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

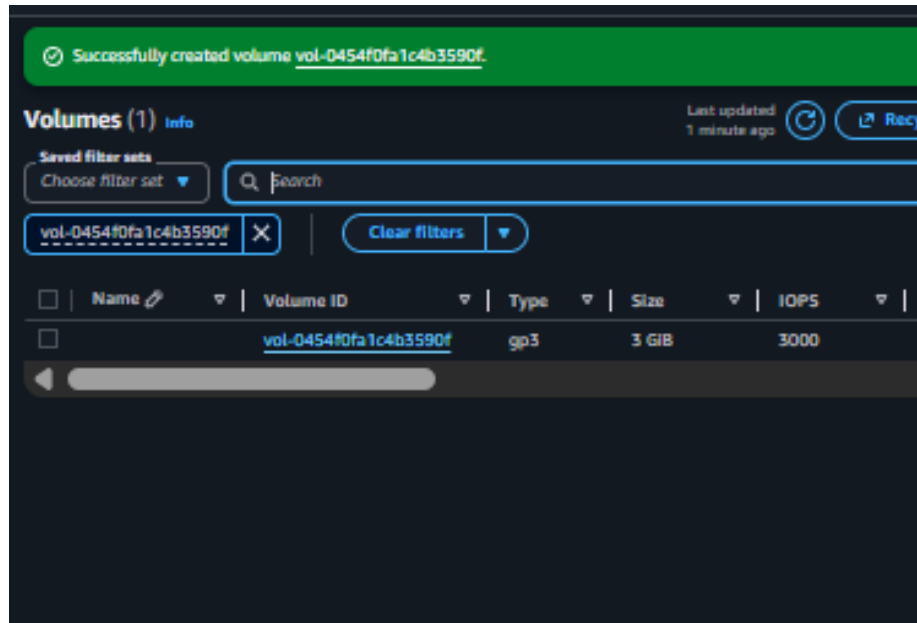

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

vol-0454f0fa1c4b3590f

Last updated 1 minute ago

Actions

Delete

Modify

Details

Volume ID  vol-0454f0fa1c4b3590f	Size  3 GiB	Type gp3	Status check  Okay
Owner ID  654654478122 (This account)	Volume state  Available	IOPS 3000	Throughput 125
Fast snapshot restored No	Availability Zone use1-az4 (us-east-1c)	Created  Tue Sep 29 2026 21:21:27 GMT-0500 (hora estándar de Colombia)	Multi-Attach enabled No
Attached resources -	Outposts ARN -	Managed false	Operator -

AWS Compute Optimizer finding
 Opt-in to AWS Compute Optimizer for recommendations. | [Learn more](#)

Source

Snapshot ID -	Source volume ID -
-------------------------	------------------------------

Encryption

Encryption Not encrypted	KMS key ID -	KMS key alias -	KMS key ARN -
------------------------------------	------------------------	---------------------------	-------------------------

Status checks

Monitoring

Volume sharing - new

Tags

Tags

Manage tags

Key	Value
name	EBS-Robinson

vol-0454f0fa1c4b3590f

Last updated less than a minute ago

Actions

Delete

Modify

Details

Volume ID  vol-0454f0fa1c4b3590f	Size  3 GiB	Type gp3	Create snapshot Create snapshot lifecycle policy Attach volume Detach volume Force detach volume Manage auto-enabled I/O Copy volume - updated Share volume - new Resilience testing Previously fault injection
Owner ID  654654478122 (This account)	Volume state  Available	IOPS 3000	
Fast snapshot restored No	Availability Zone use1-az4 (us-east-1c)	Created  Tue Sep 29 2026 21:21:27 GMT-0500 (hora estándar de Colombia)	
Attached resources -	Outposts ARN -	Managed false	
Operator -			


AWS Compute Optimizer finding
 Opt-in to AWS Compute Optimizer for recommendations. | [Learn more](#)

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

www.betek.la

@betek.la

Medellín, Colombia

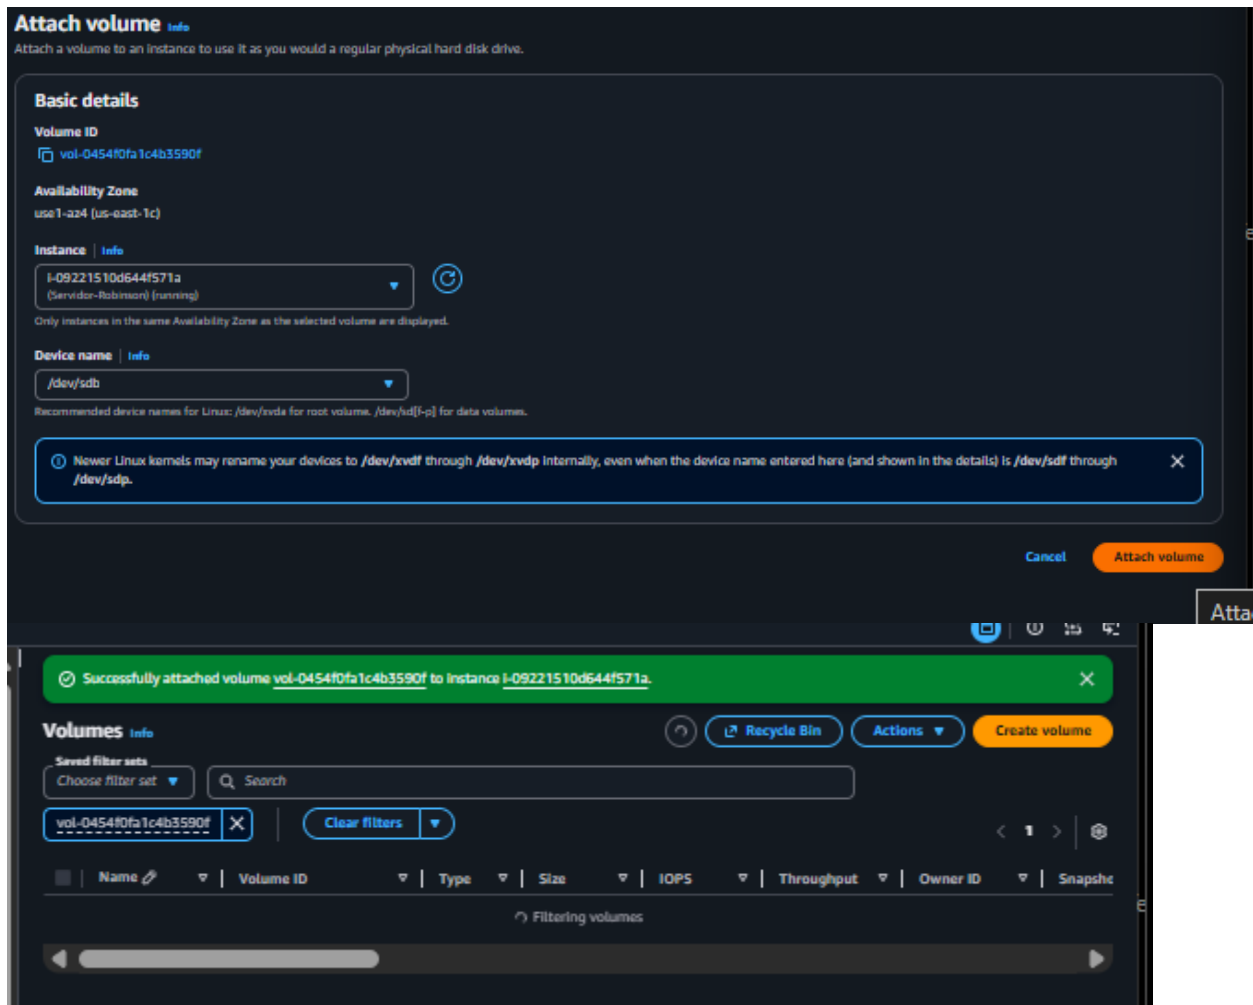


5. Crea un bucket (S3), asignarle TAGs y subir un archivo .TXT básico

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

www.betek.la

@betek.la

Medellín, Colombia

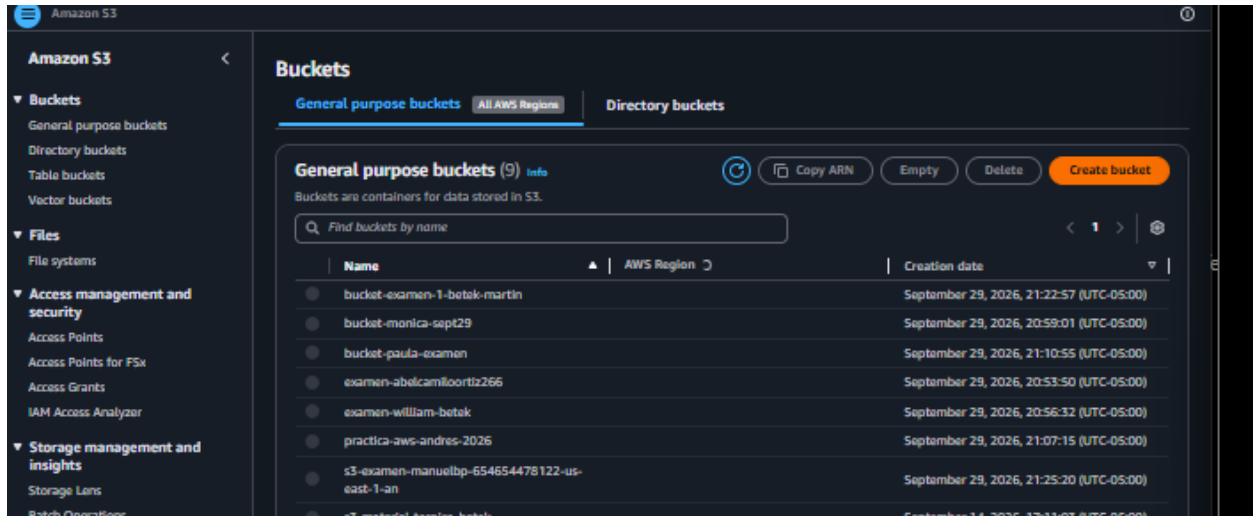

Amazon S3

- Buckets**
 - General purpose buckets
 - Directory buckets
 - Table buckets
 - Vector buckets
- Files**
 - File systems
- Access management and security**
 - Access Points
 - Access Points for FSx
 - Access Grants
 - IAM Access Analyzer
- Storage management and insights**
 - Storage Lens
 - Batch Operations

Buckets


General purpose buckets All AWS Regions Directory buckets

General purpose buckets (9) [Info](#)

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	Creation date
bucket-examen-1-betek-martin		September 29, 2026, 21:22:57 (UTC-05:00)
bucket-monica-sept29		September 29, 2026, 20:59:01 (UTC-05:00)
bucket-paula-examen		September 29, 2026, 21:10:55 (UTC-05:00)
examen-abelcamiloortiz266		September 29, 2026, 20:53:50 (UTC-05:00)
examen-william-betek		September 29, 2026, 20:56:32 (UTC-05:00)
practica-aws-andres-2026		September 29, 2026, 21:07:15 (UTC-05:00)
s3-examen-manuelbp-654654478122-us-east-1-an		September 29, 2026, 21:25:20 (UTC-05:00)
s3-material-topico-betek		September 14, 2026, 17:11:01 (UTC-05:00)

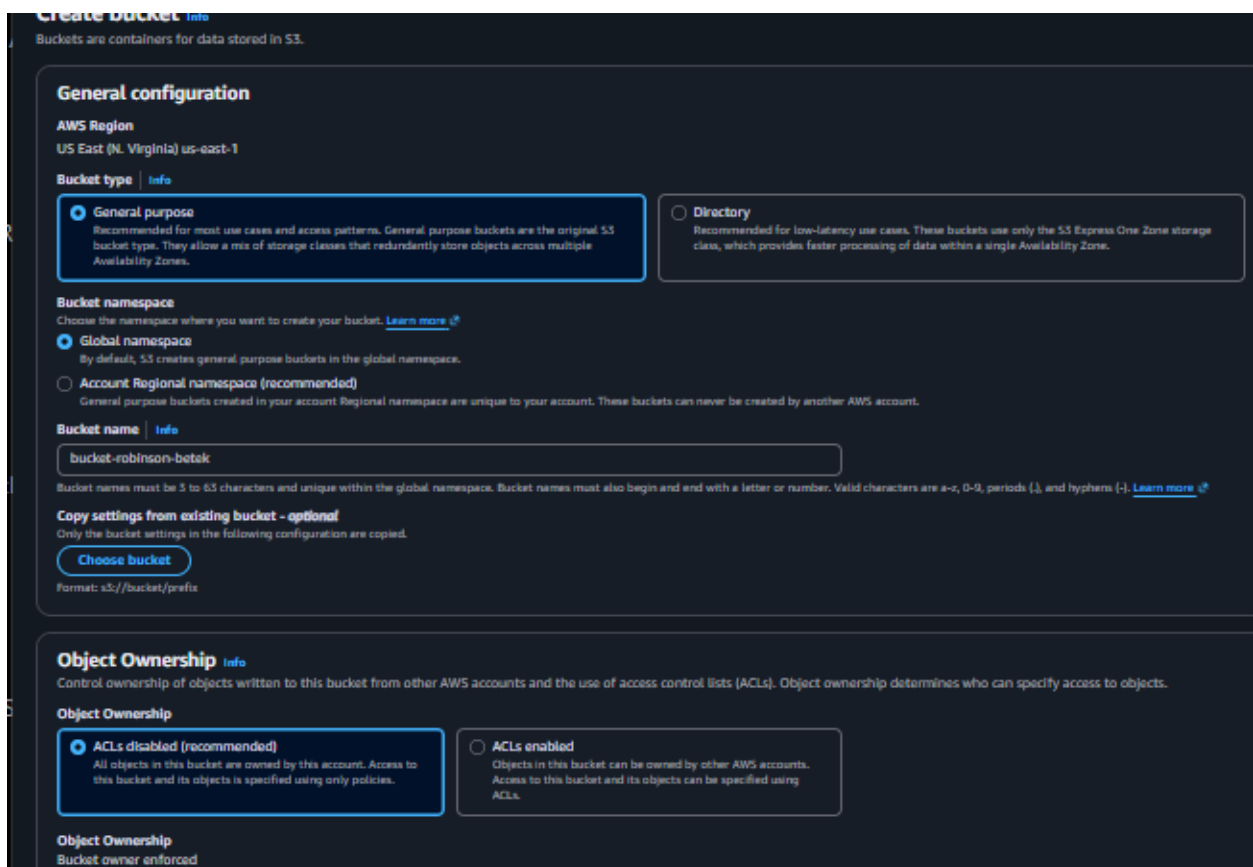

Create bucket

Buckets are containers for data stored in S3.

General configuration

AWS Region
US East (N. Virginia) us-east-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace
Choose the namespace where you want to create your bucket. [Learn more](#)

☒ **Global namespace**
By default, S3 creates general purpose buckets in the global namespace.

☐ **Account Regional namespace (recommended)**
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)
bucket-robinson-betek

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☒ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership
Bucket owner enforced

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

www.betek.la

@betek.la

Medellín, Colombia

Tags - optional

You can use bucket tags to analyze, manage and specify permissions for a bucket. [Learn more](#)

1

You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. [Learn more](#)

Key

name

Value - optional

PracticaS3Robinson

Remove

Add new tag

You can add up to 49 more tags

Default encryption

info

Server-side encryption is automatically applied to new objects stored in this bucket.

Key

name

Value - optional

PracticaS3Robinson

Remove

Add new tag

You can add up to 49 more tags

Default encryption

info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

info

Secure your objects with two separate layers of encryption. For details on pricing, see [D SSE-KMS pricing on the Storage tab of the Amazon S3 pricing page](#).

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

► Advanced settings

1 After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

✔ Successfully created bucket "bucket-robinson-betek"

bucket-robinson-betek

info

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems

Access Points

Upload Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the [AWS CLI](#), [AWS SDKs](#) or [Amazon S3 REST API](#). [Learn more](#) ↗

Drag and drop files and folders you want to upload here, or choose [Add files](#) or [Add folder](#).

Files and folders (1 total, 0 B)

All files and folders in this table will be uploaded.

< 1 >

☐	Name	Folder	Type	Size
☐	evidencia.txt	-	text/plain	0 B

Destination Info

Destination
[s3://bucket-robinson-betek](#) ↗

► **Destination details**
 Bucket settings that impact new objects stored in the specified destination.

► **Permissions**
 Grant public access and access to other AWS accounts.

► **Properties**
 Specify storage class, encryption settings, tags, and more.

[Cancel](#)
[Upload](#)

Amazon S3

✓ **Upload succeeded**
 For more information, see the [Files and folders table](#).

Upload: status Close

ⓘ After you navigate away from this page, the following information is no longer available.

Summary

Destination s3://bucket-robinson-betek	Succeeded ✓ 1 file, 0 B (0%)	Failed ✗ 0 files, 0 B (0%)
--	---	---

Files and folders

Configuration

Files and folders (1 total, 0 B)

< 1 >

Name	Folder	Type	Size	Status	Error
evidencia.txt ↗	-	text/plain	0 B	✓ Succeeded	-

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.


Medellín, Colombia

www.betek.la


[@betek.la](https://twitter.com/betek.la)

6. Subir a su repositorio:

- Print Screen de resumen de configuración de lanzamiento de EC2

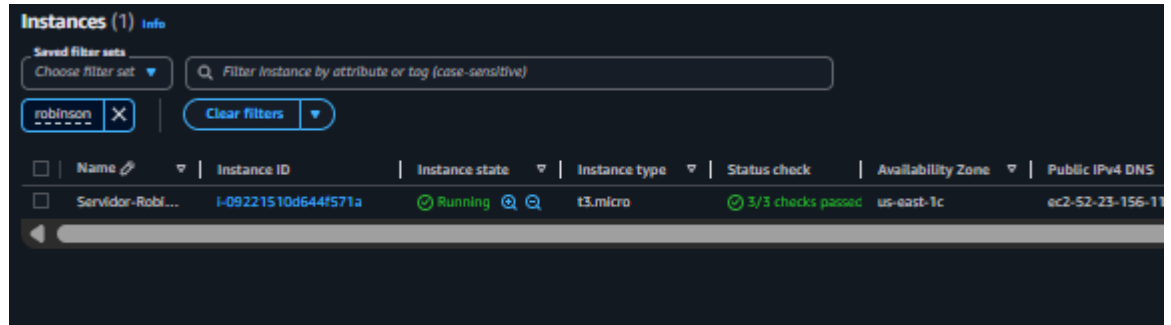

- Print screen de la URL (IP Pública) de su EC2 una vez esta esté corriendo

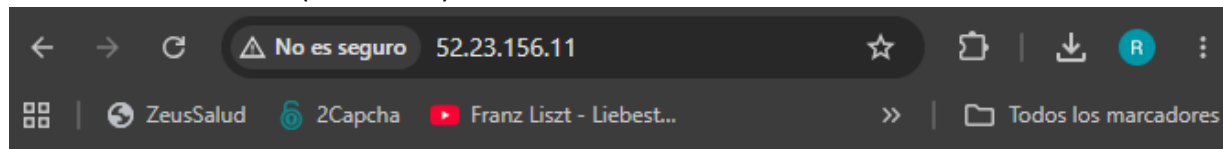

It works!

- Print Screen donde se vean los dos discos (EBS). el principal y el que creen en el paso 4 asignados a su instancia

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina
701.


Medellín, Colombia



- Print screen donde se evidencia el archivo subido al S3 después de crearlo.

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina 701.

Medellín, Colombia

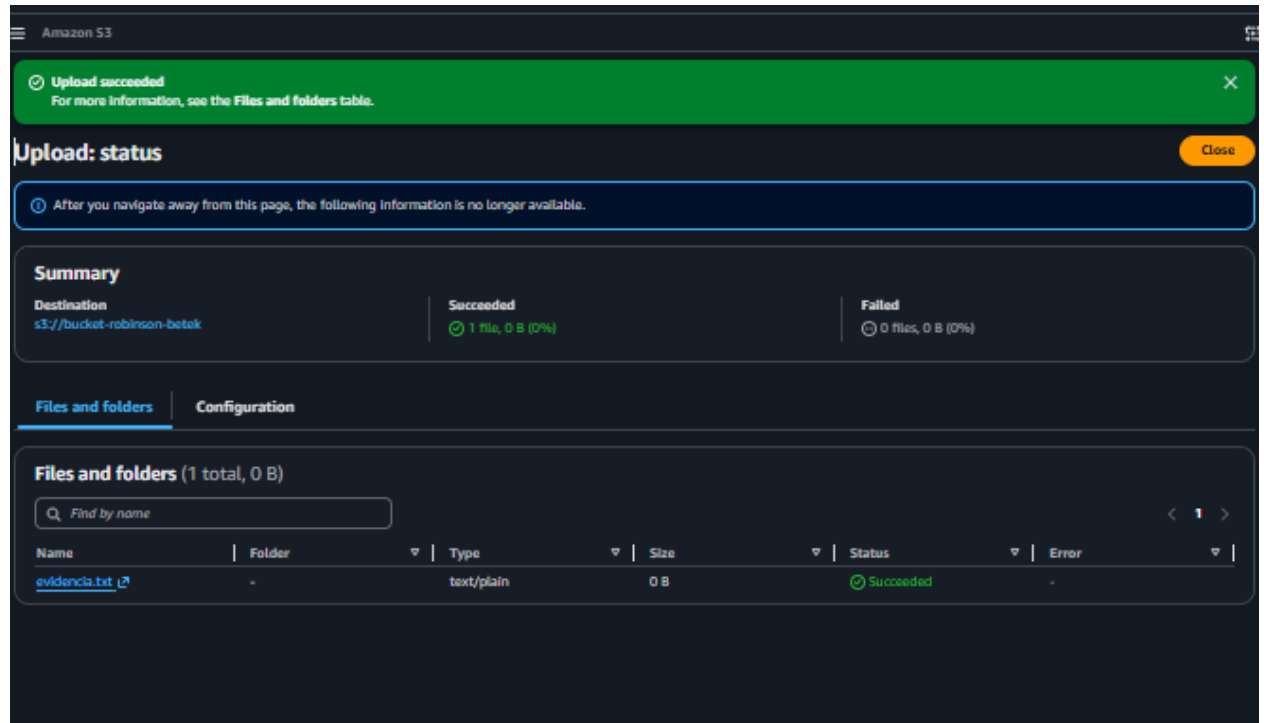

- Subirlo en un solo archivo ya sea PDF nombrarlo

<Su_Nombre>-Modulo1-Examen.

ejemplo: PepitoPerez-Modulo1-ExamenPractico

Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina
701.

Medellín, Colombia



Carrera 43 A # 34 – 155. Torre Norte, Almacentro. Oficina
701.

Medellín, Colombia