
PRÁCTICA MÓDULO 2 - PRIMERA PARTE

En esta práctica, debe crear su propio servidor web:

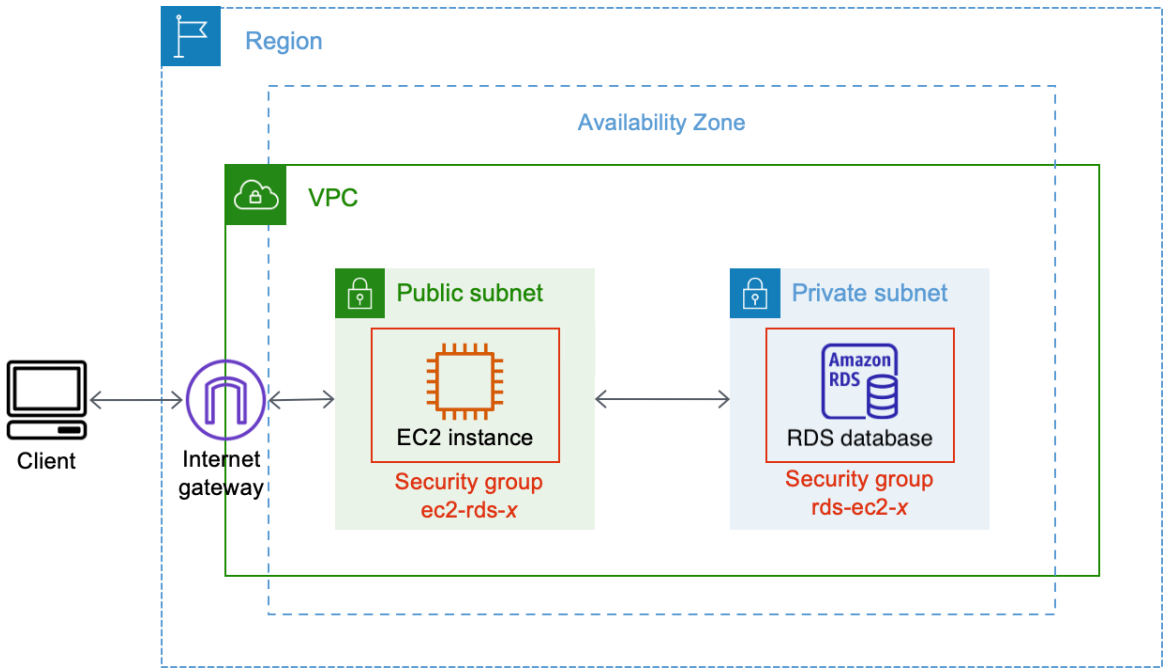



EC2: subnet-00227b47a5f26ec04 public EC2 EC2-GrupodeSeguridad-AWS ID sg-0af17416a233137b2

RDS: subnet-056e633061b55dcbe private RDS sg-0abdd59dea4acc995


Realice el exámen en el siguiente orden:


1. Crear un par de claves nuevo para poder conectarse a su servidor vía SSH

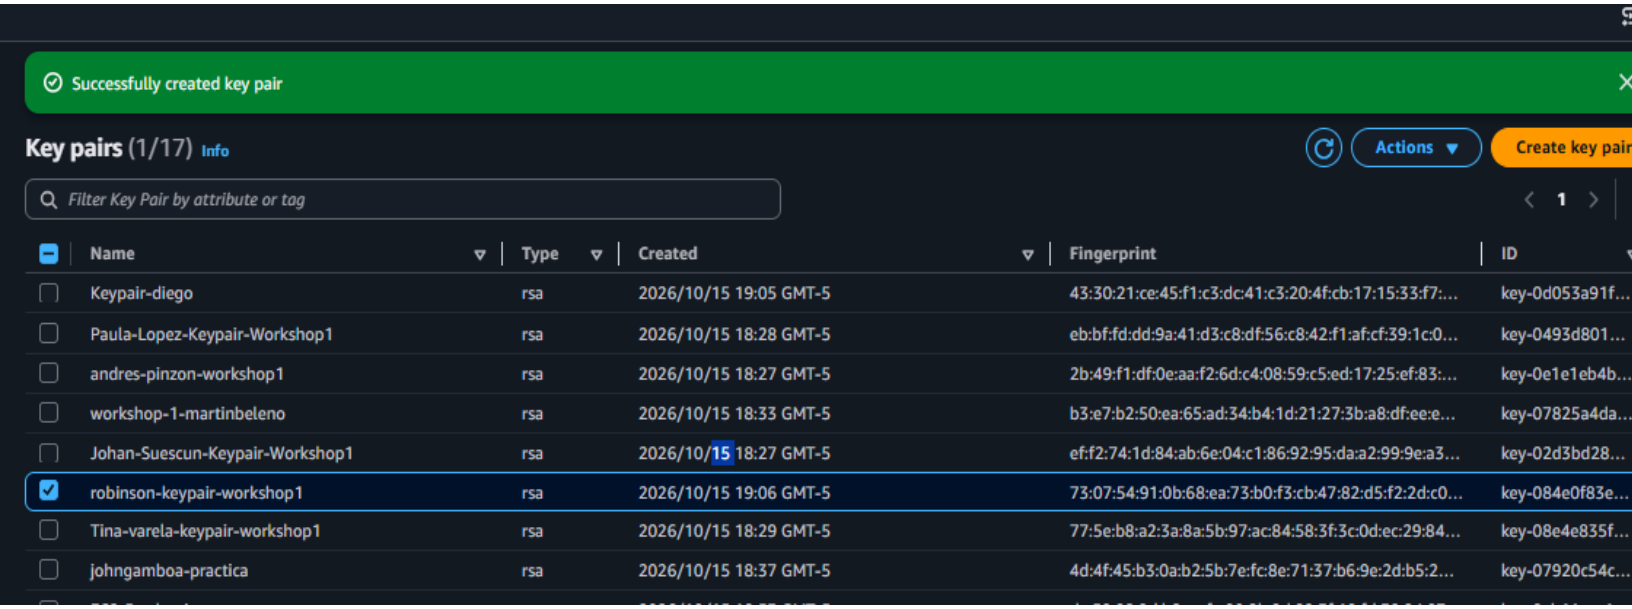

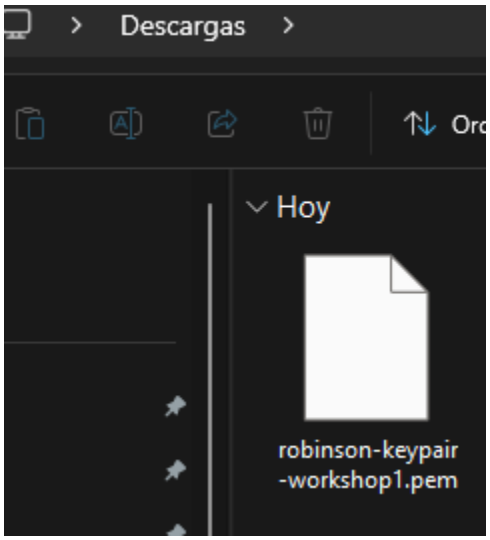


2. Crear dos grupos de seguridad uno para la EC2 y otro para la RDS

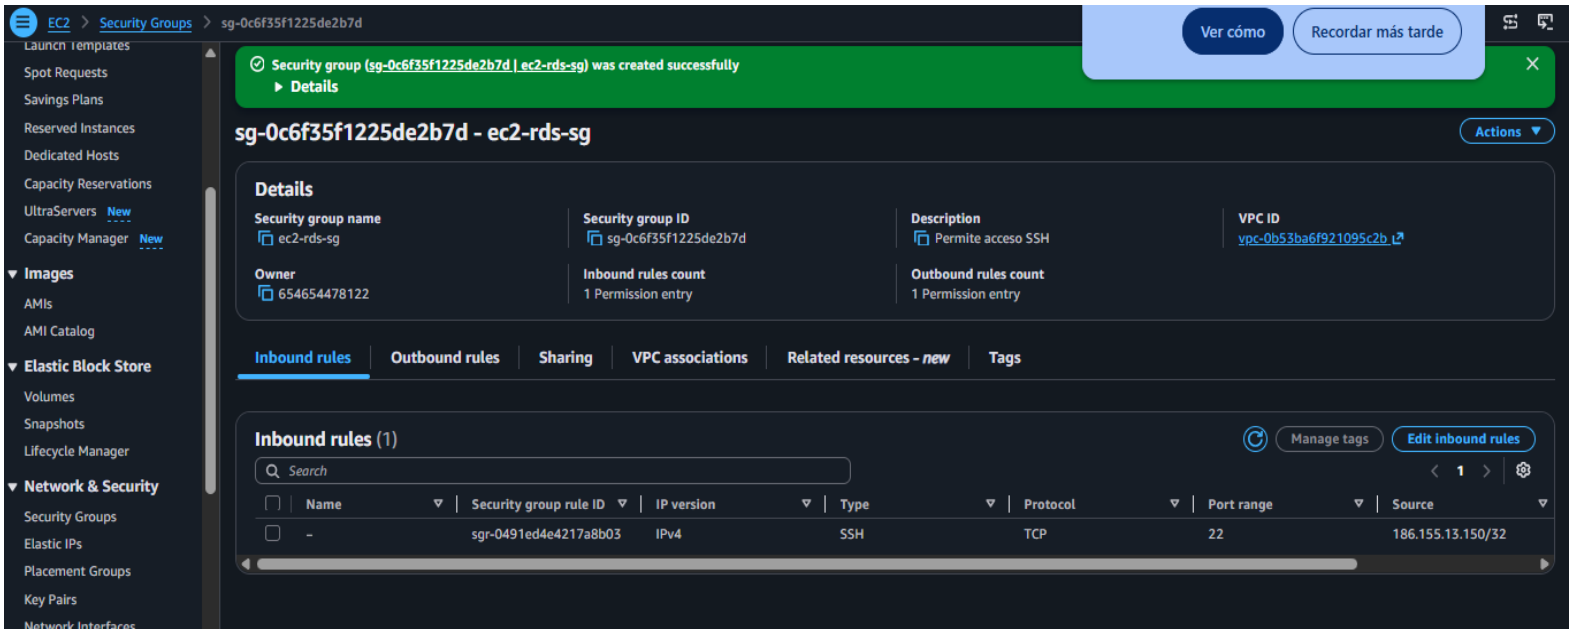


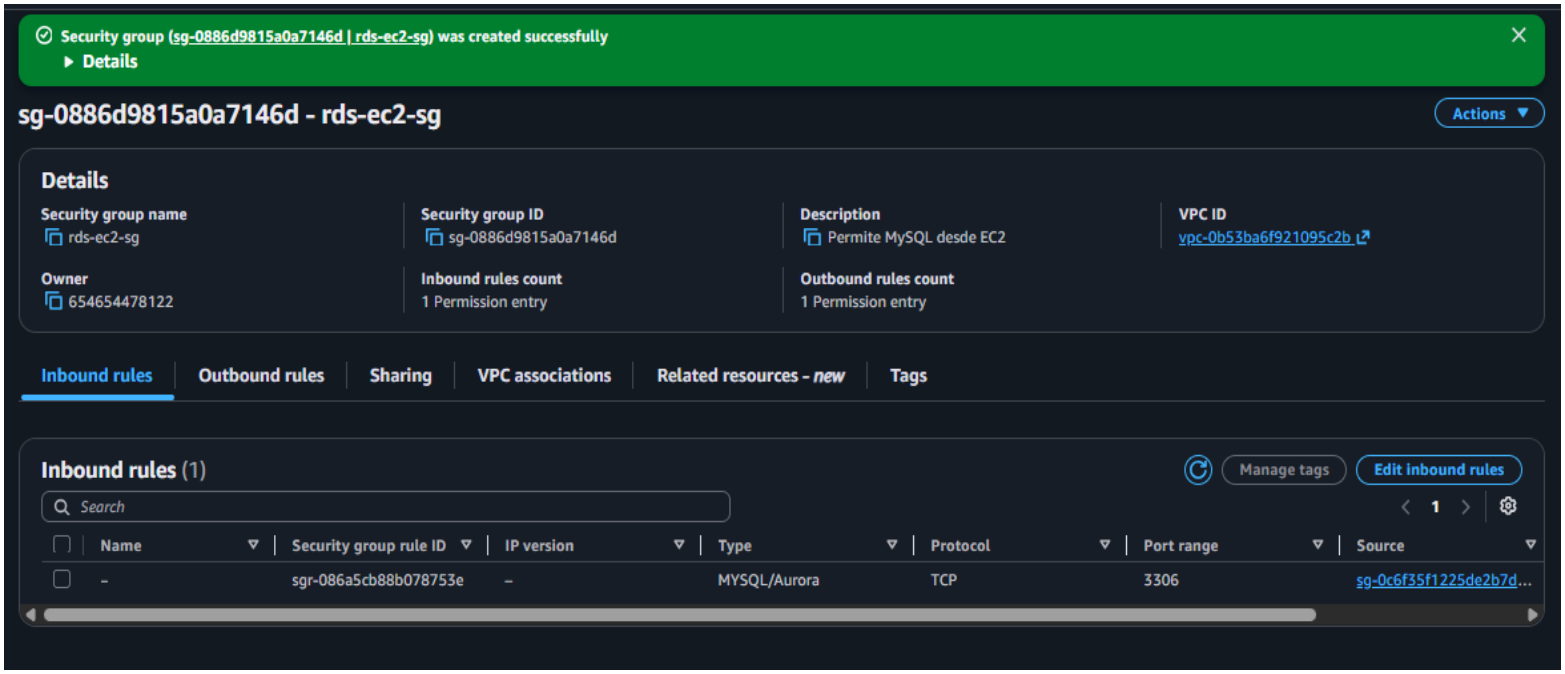



3. Lanzar una instancia de servidor web **Amazon EC2 - t2.micro 8GB de almacenamiento , solo escoger el de capa gratuita**

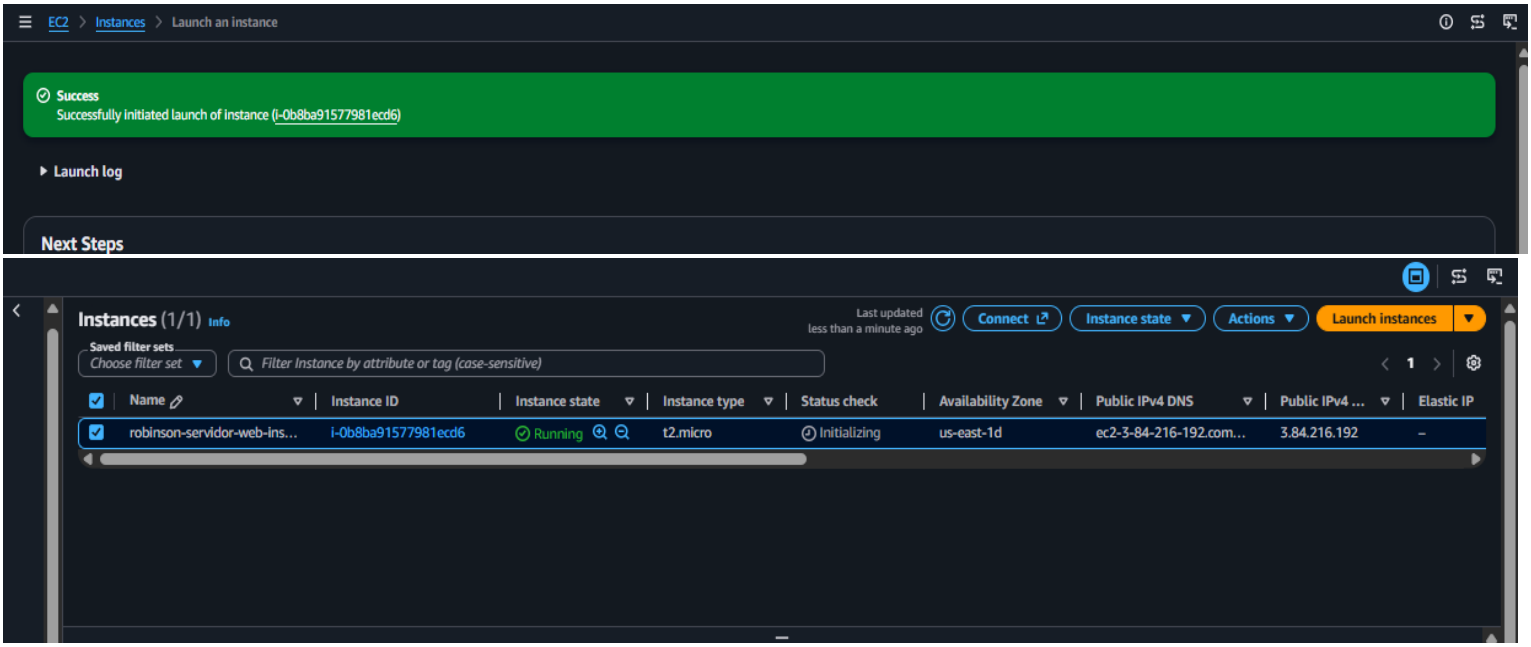

4. Lanzar una RDS **Amazon RDS - db.t3.micro 5GB de almacenamiento tipo mysql no aurora mysql, solo escoger el de capa gratuita**, configurar usuario y contraseña para conectarse.

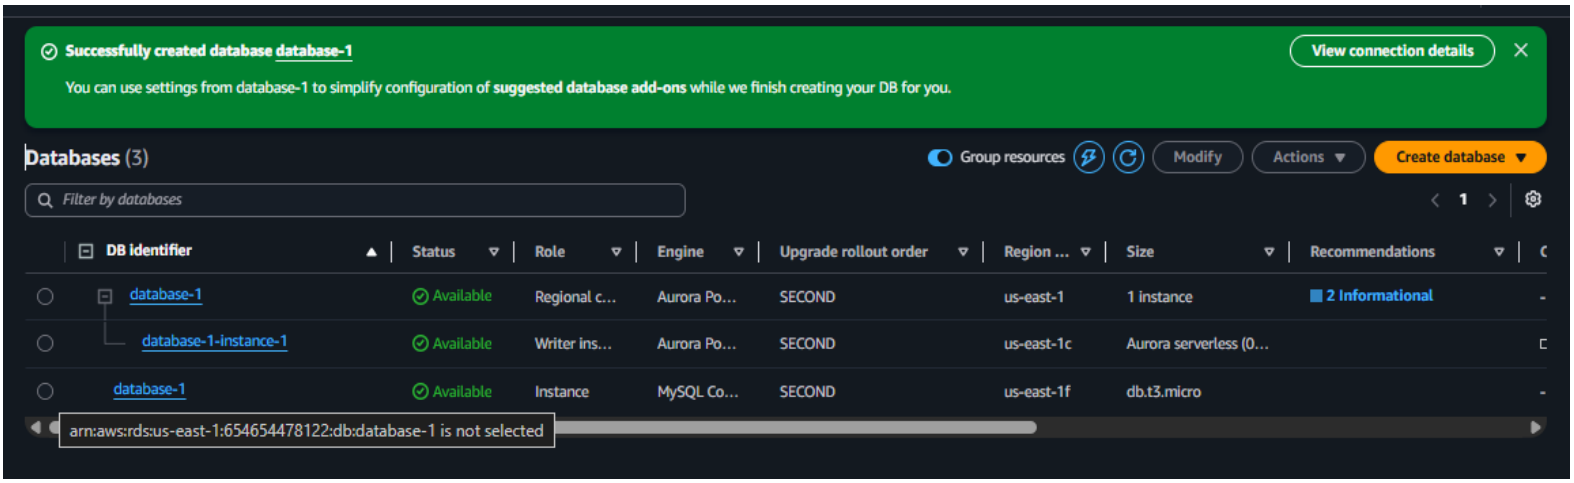

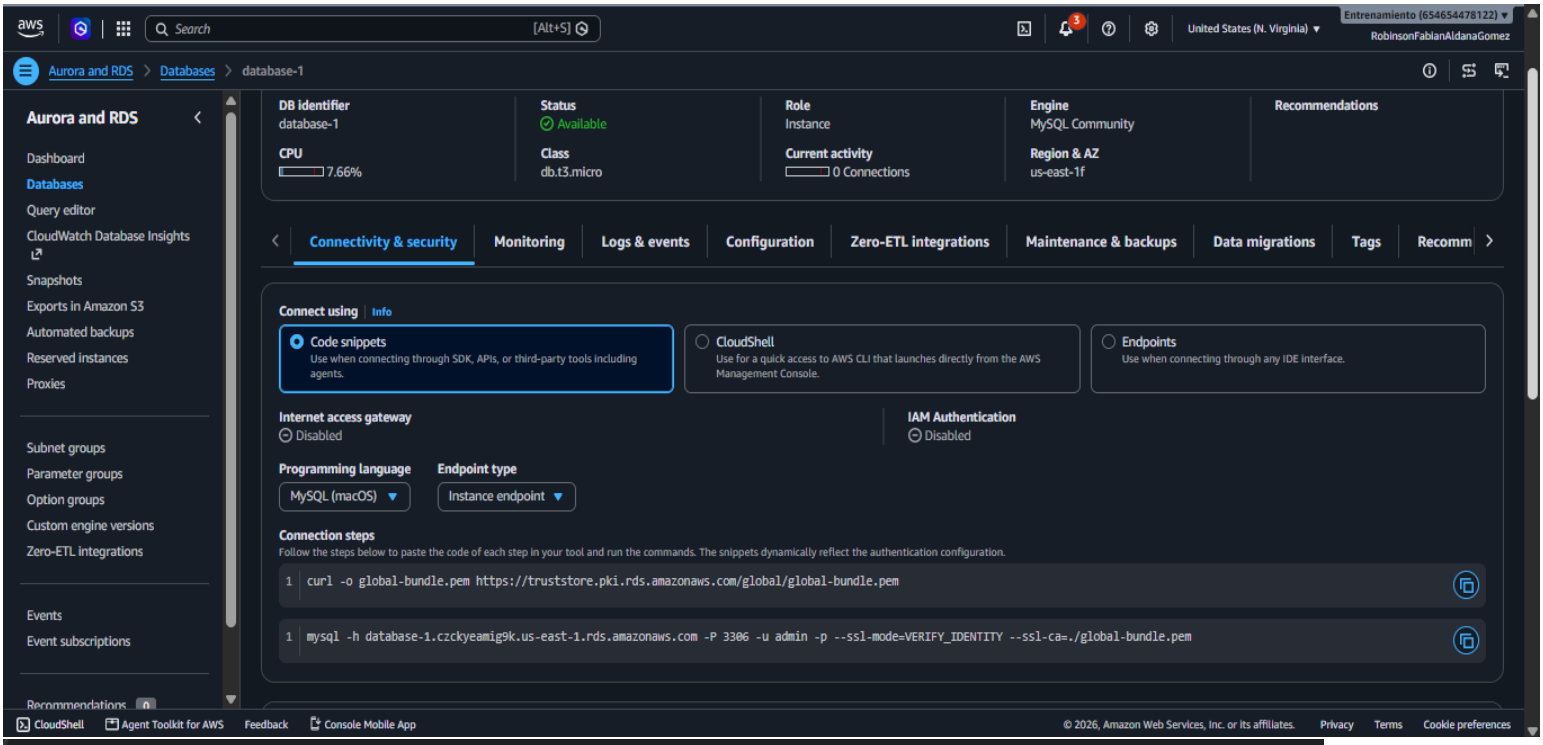
Search
[Alt+S]
United States (N. Virginia)
Entrenamiento (654654478122)
RobinsonFabianAldanaGomez
Aurora and RDS > Databases > database-1
Aurora and RDS
Dashboard
Databases
Query editor
CloudWatch Database Insights
Snapshots
Exports in Amazon S3
Automated backups
Reserved instances
Proxies
Subnet groups
Parameter groups
Option groups
Custom engine versions
Zero-ETL integrations
Events
Event subscriptions
DB identifier
database-1
Status
Available
Role
Instance
Engine
MySQL Community
Recommendations
CPU
7.66%
Class
db.t3.micro
Current activity
0 Connections
Region & AZ
us-east-1f
Connectivity & security
Monitoring
Logs & events
Configuration
Zero-ETL integrations
Maintenance & backups
Data migrations
Tags
Recomm
Connect using
Info
Code snippets
Use when connecting through SDK, APIs, or third-party tools including agents.
CloudShell
Use for a quick access to AWS CLI that launches directly from the AWS Management Console.
Endpoints
Use when connecting through any IDE interface.
Internet access gateway
Disabled
IAM Authentication
Disabled
Programming language
MySQL (macOS)
Endpoint type
Instance endpoint
Connection steps
Follow the steps below to paste the code of each step in your tool and run the commands. The snippets dynamically reflect the authentication configuration.
1 curl -o global-bundle.pem https://truststore.pki.rds.amazonaws.com/global/global-bundle.pem
1 mysql -h database-1.czckyeamig9k.us-east-1.rds.amazonaws.com -P 3306 -u admin -p --ssl-mode=VERIFY_IDENTITY --ssl-ca=./global-bundle.pem
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

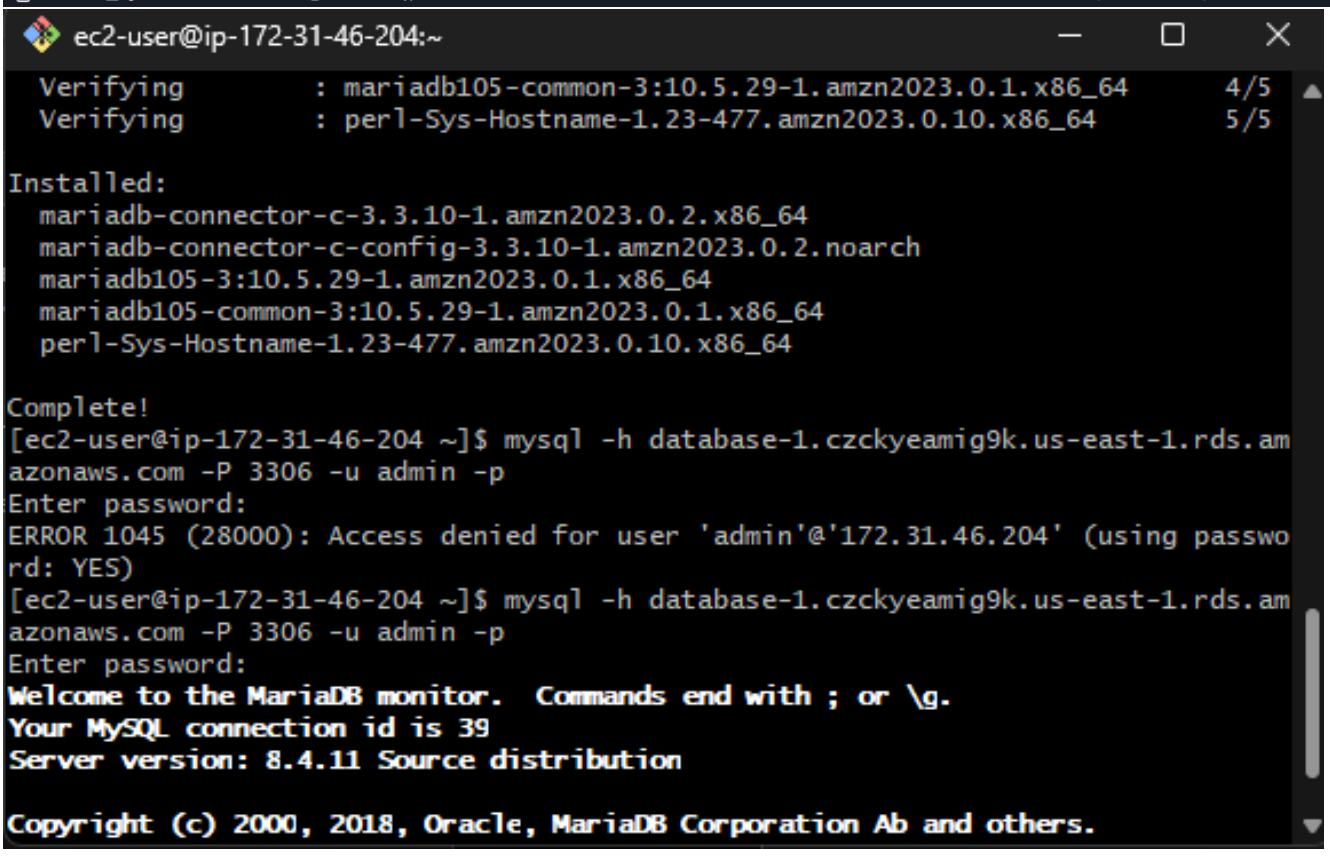
ec2-user@ip-172-31-46-204:~
Verifying : mariadb105-common-3:10.5.29-1.amzn2023.0.1.x86_64 4/5
Verifying : perl-Sys-Hostname-1.23-477.amzn2023.0.10.x86_64 5/5
Installed:
mariadb-connector-c-3.3.10-1.amzn2023.0.2.x86_64
mariadb-connector-c-config-3.3.10-1.amzn2023.0.2.noarch
mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-common-3:10.5.29-1.amzn2023.0.1.x86_64
perl-Sys-Hostname-1.23-477.amzn2023.0.10.x86_64
Complete!
[ec2-user@ip-172-31-46-204 ~]$ mysql -h database-1.czckyeamig9k.us-east-1.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
ERROR 1045 (28000): Access denied for user 'admin'@'172.31.46.204' (using password: YES)
[ec2-user@ip-172-31-46-204 ~]$ mysql -h database-1.czckyeamig9k.us-east-1.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MySQL connection id is 39
Server version: 8.4.11 Source distribution
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

```
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 39
Server version: 8.4.11 Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MySQL [(none)]>
```

```
ec2-user@ip-172-31-46-204:~
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MySQL connection id is 39
Server version: 8.4.11 Source distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MySQL [(none)]> CREATE DATABASE examen_db;
Query OK, 1 row affected (0.042 sec)

MySQL [(none)]> SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| examen_db          |
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
5 rows in set (0.013 sec)

MySQL [(none)]>
```

```
MySQL [(none)]> EXIT;
Bye
[ec2-user@ip-172-31-46-204 ~]$ exit
logout
Connection to 3.84.216.192 closed.

Robinosn@DESKTOP-BUQQM82 MINGW64 ~/Downloads
$
```


¡Has completado con éxito la configuración de la instancia EC2, la base de d
conectividad entre ambas y la validación final!

PASOS:

1. Crear un par de claves (keypair) nuevo .pem

   Indispensable para poder conectarse a la instancia

2. Crear los grupos de seguridad :
   - El grupo de seguridad del EC2 debe tener permitido el puerto 22 desde tu instancia para hacer SSH
   - El grupo de seguridad que vas a usar en la RDS debe permitir el tráfico por 3306 o mysql al grupo de seguridad de la instancia, el de la imagen es solo un ejemplo pero le estas permitiendo el trafico a el grupo de la EC2 para que pueda entrar el SG de la RDS.




3. Lanzar la RDS: RECUERDA **anotar el usuario y contraseña** en algún lugar, tiene que ser **MySQL NO AuroraMySQL**, adicional tiene que ser en la **capa gratuita**.

4. Lanzar la EC2, permitir el tráfico SSH desde tu dirección IP.


5. Conectate a la EC2, instala el MariaDB
   - Si es Amazon Linux con el comando **sudo dnf install mariadb105**

mysql -h database-aws-example.czckyeamig9k.us-east-1.rds.amazonaws.com


6. Posteriormente conectate al la RDS desde la EC2 con el comando:
   - **mysql -h database-1.czckyeamig9k.us-east-1.rds.amazonaws.com \ -u admin \ -p**
   - El endpoint lo encontrarás en tu RDS y el usuario fue el que se configuró al momento de lanzar la RDS junto con la contraseña que se le asignó al momento de lanzarla

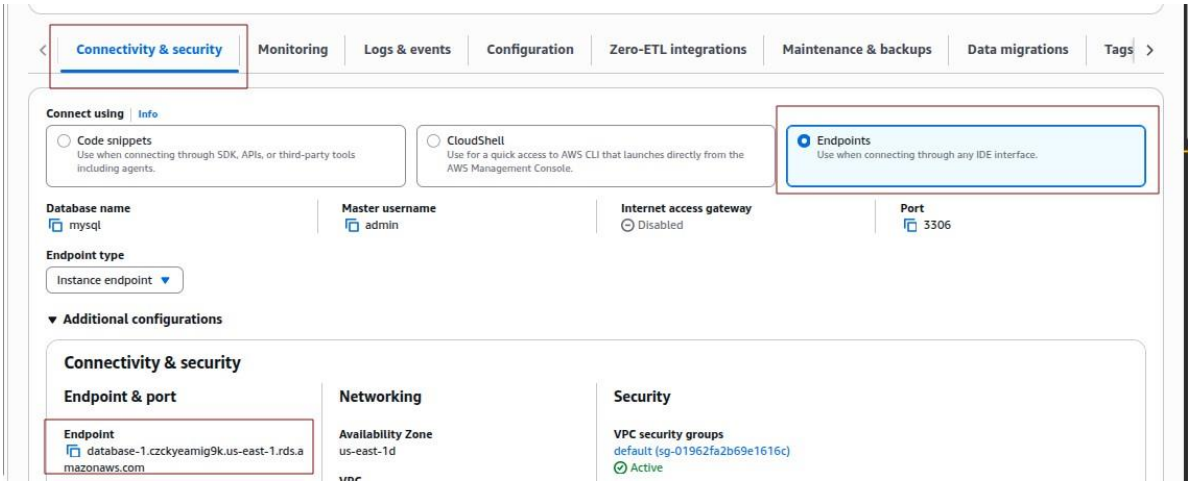


7. Ya conectado a la RDS, crear una Base de datos:
    - **CREATE DATABASE laboratoriotunombre;** para crear una base de datos que se llame laboratorio
    - SHOW DATABASES; Mostrar las bases de datos creadas
    - Para asegurar que se conectó correctamente su consola se deberá ver así:

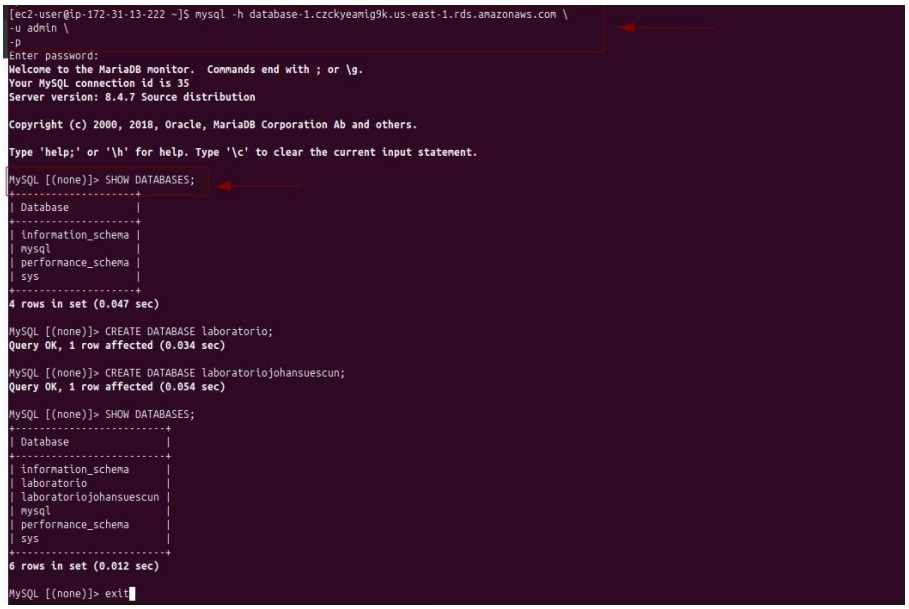



8. Subir evidencia
    - Print Screen de resumen de configuración de lanzamiento de EC2

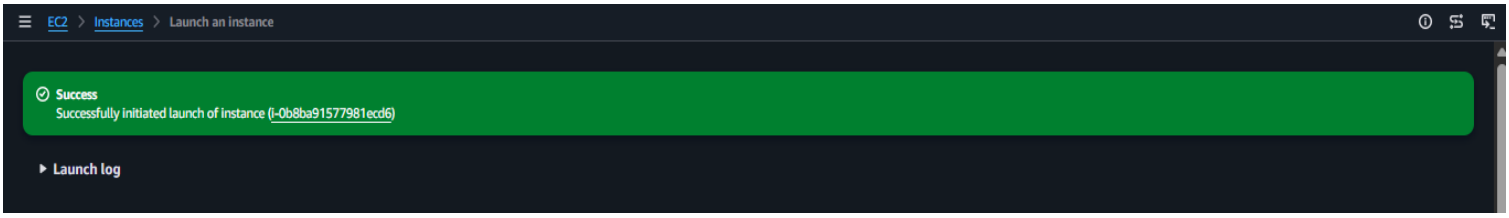

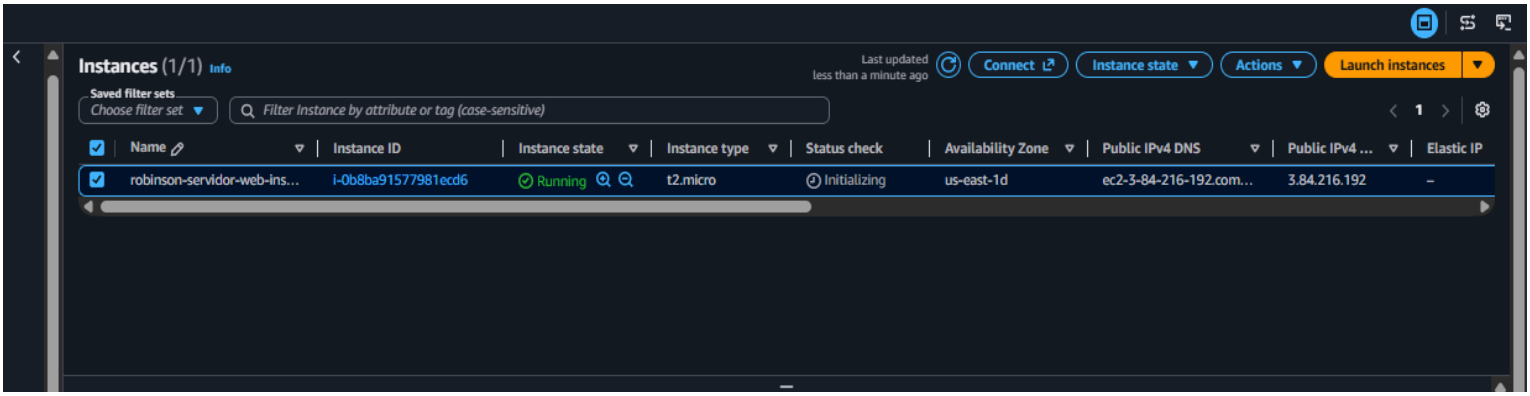



- Print screen RDS y el grupo de seguridad

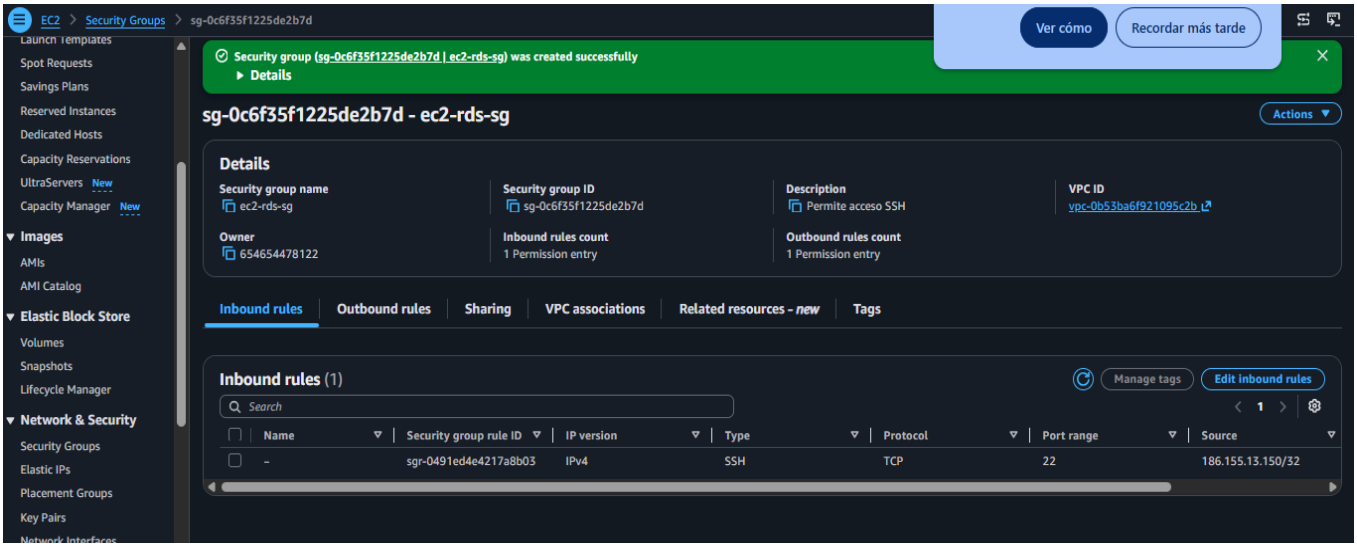

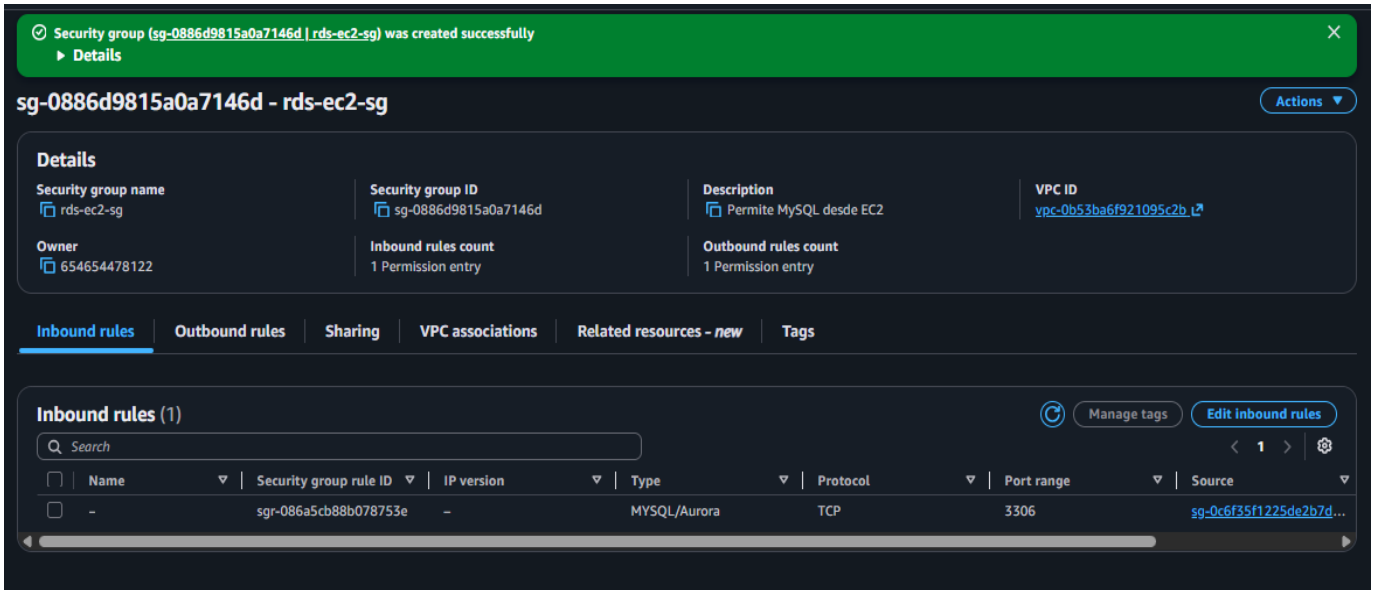


- Print Screen donde se vea conectado a la RDS desde la EC2

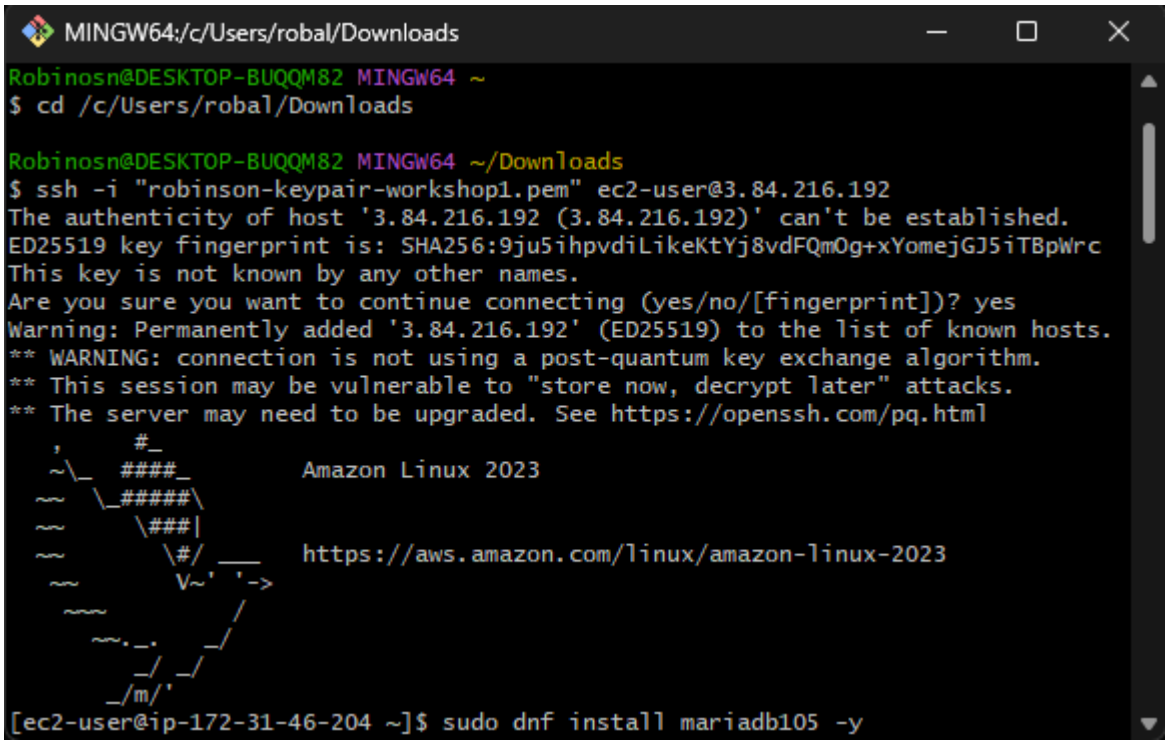

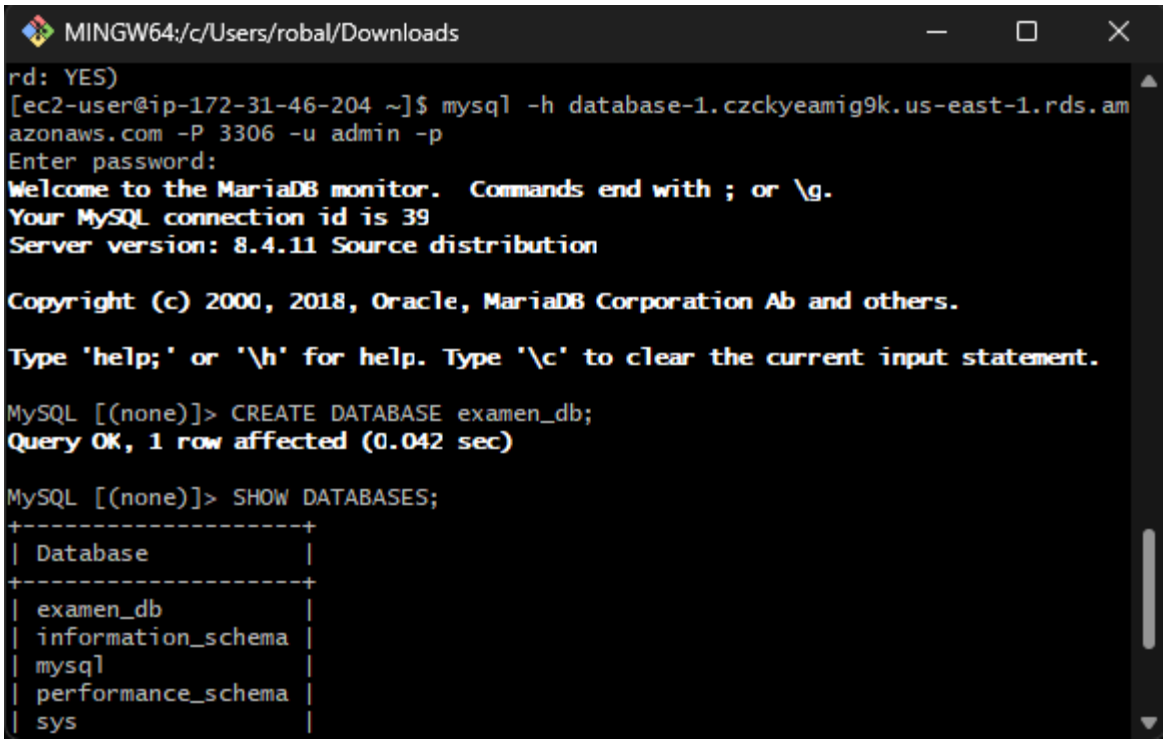
MINGW64:/c/Users/robal/Downloads
rd: YES)
[ec2-user@ip-172-31-46-204 ~]$ mysql -h database-1.czckyeamig9k.us-east-1.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MySQL connection id is 39
Server version: 8.4.11 Source distribution
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
MySQL [(none)]> CREATE DATABASE examen_db;
Query OK, 1 row affected (0.042 sec)
MySQL [(none)]> SHOW DATABASES;
+--------------------+
| Database |
+--------------------+
| examen_db |
| information_schema |
| mysql |
| performance_schema |
| sys |

- Print screen donde se vea comando de crear database y showdatabase donde muestre la base de datos con su nombre

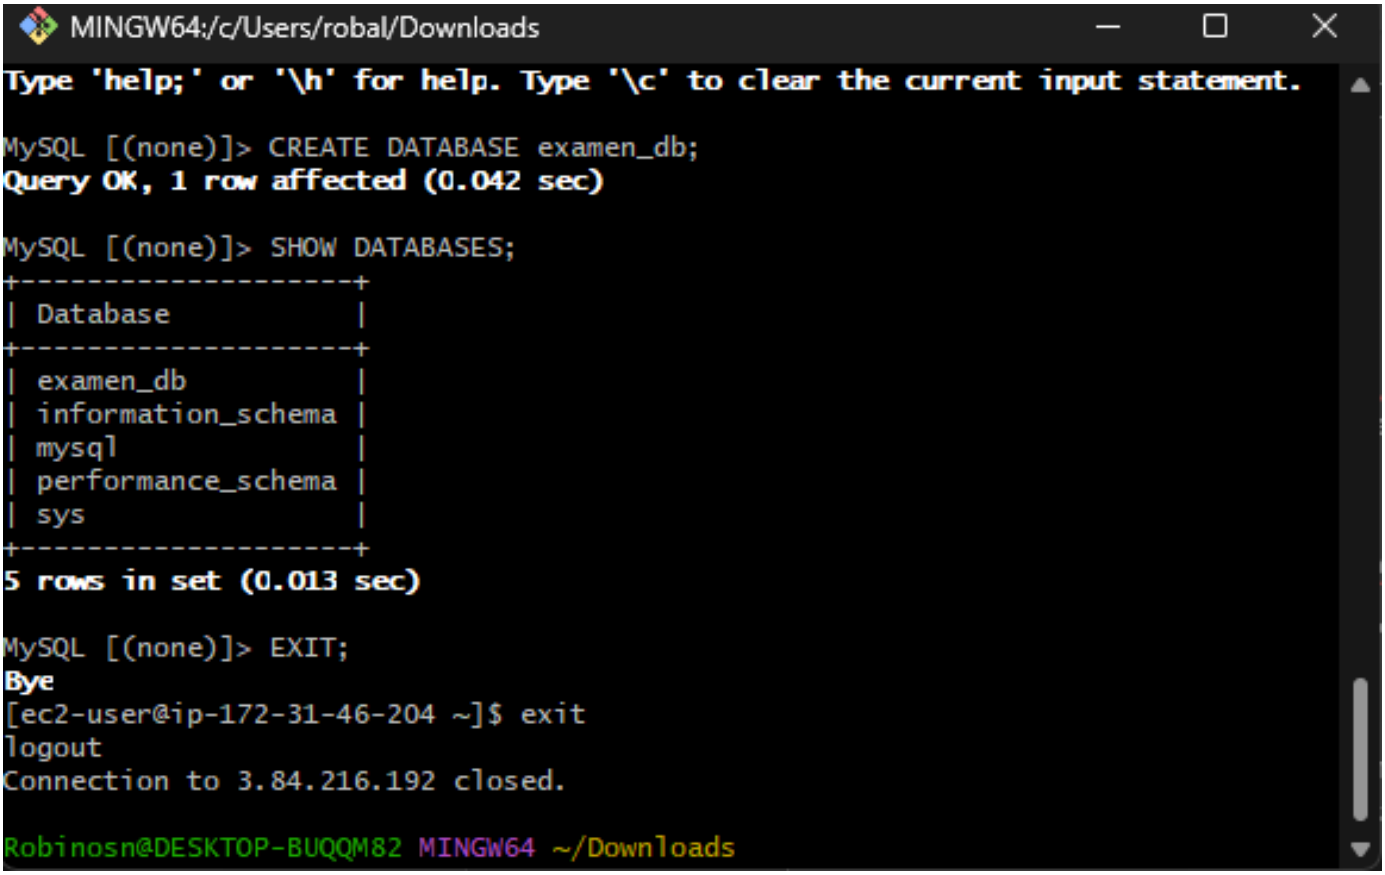

- Subirlo en un solo archivo ya sea PDF nombrarlo <Su_Nombre>-Modulo2-Examen1.

  ejemplo: PepitoPerez-Modulo2-ExamenPractico1

RECUERDA: Siempre eliminar todos los recursos y servicios desplegados, luego de tomar las respectivas evidencias