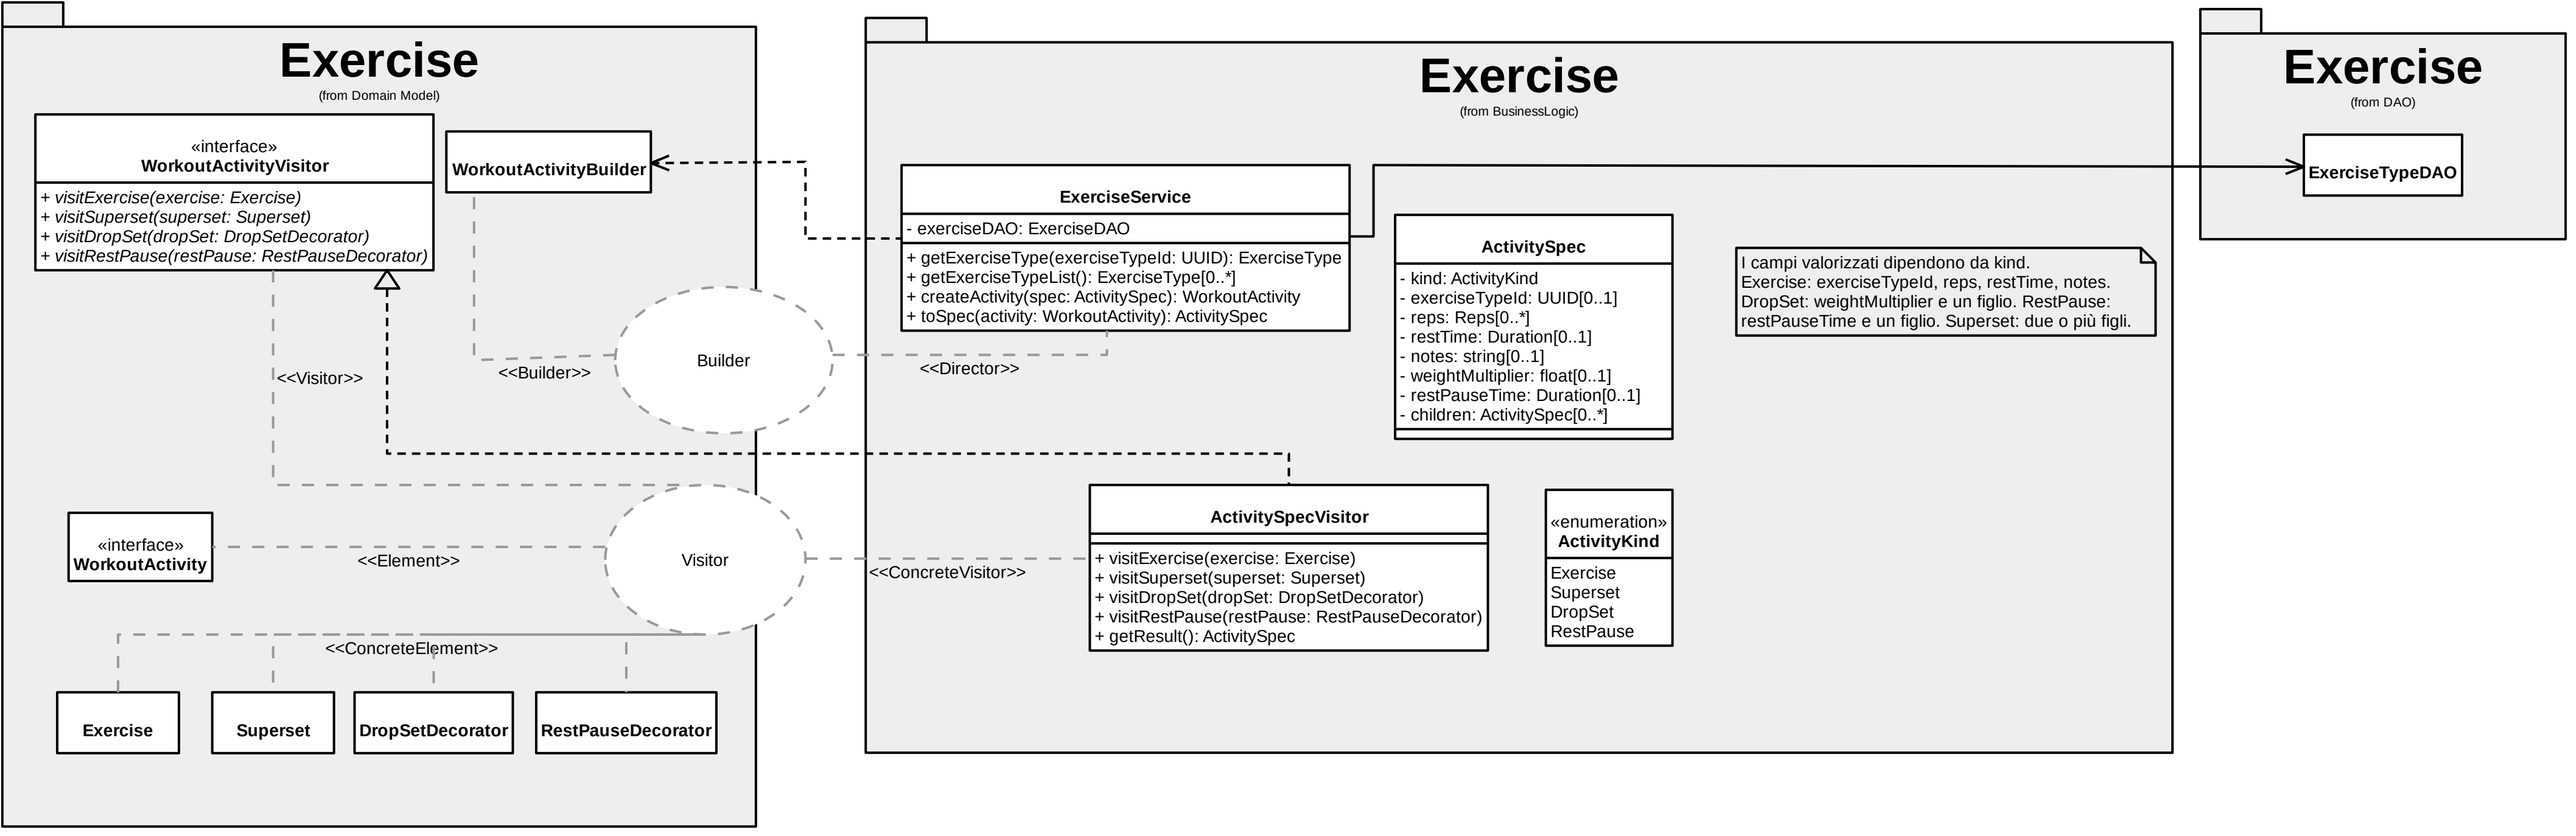
Exercise
(from Domain Model)
«interface»
WorkoutActivityVisitor
+ visitExercise(exercise: Exercise)
+ visitSuperset(superset: Superset)
+ visitDropSet(dropSet: DropSetDecorator)
+ visitRestPause(restPause: RestPauseDecorator)
WorkoutActivityBuilder
<<Visitor>>
<<Builder>>
Builder
«interface»
WorkoutActivity
<<Element>>
Visitor
<<ConcreteElement>>
Exercise
Superset
DropSetDecorator
RestPauseDecorator
Exercise
(from BusinessLogic)
ExerciseService
- exerciseDAO: ExerciseDAO
+ getExerciseType(exerciseTypeId: UUID): ExerciseType
+ getExerciseTypeList(): ExerciseType[0..*]
+ createActivity(spec: ActivitySpec): WorkoutActivity
+ toSpec(activity: WorkoutActivity): ActivitySpec
<<Director>>
ActivitySpec
- kind: ActivityKind
- exerciseTypeId: UUID[0..1]
- reps: Reps[0..*]
- restTime: Duration[0..1]
- notes: string[0..1]
- weightMultiplier: float[0..1]
- restPauseTime: Duration[0..1]
- children: ActivitySpec[0..*]
I campi valorizzati dipendono da kind.
Exercise: exerciseTypeId, reps, restTime, notes.
DropSet: weightMultiplier e un figlio. RestPause:
restPauseTime e un figlio. Superset: due o più figli.
ActivitySpecVisitor
+ visitExercise(exercise: Exercise)
+ visitSuperset(superset: Superset)
+ visitDropSet(dropSet: DropSetDecorator)
+ visitRestPause(restPause: RestPauseDecorator)
+ getResult(): ActivitySpec
<<ConcreteVisitor>>
«enumeration»
ActivityKind
Exercise
Superset
DropSet
RestPause
Exercise
(from DAO)
ExerciseTypeDAO