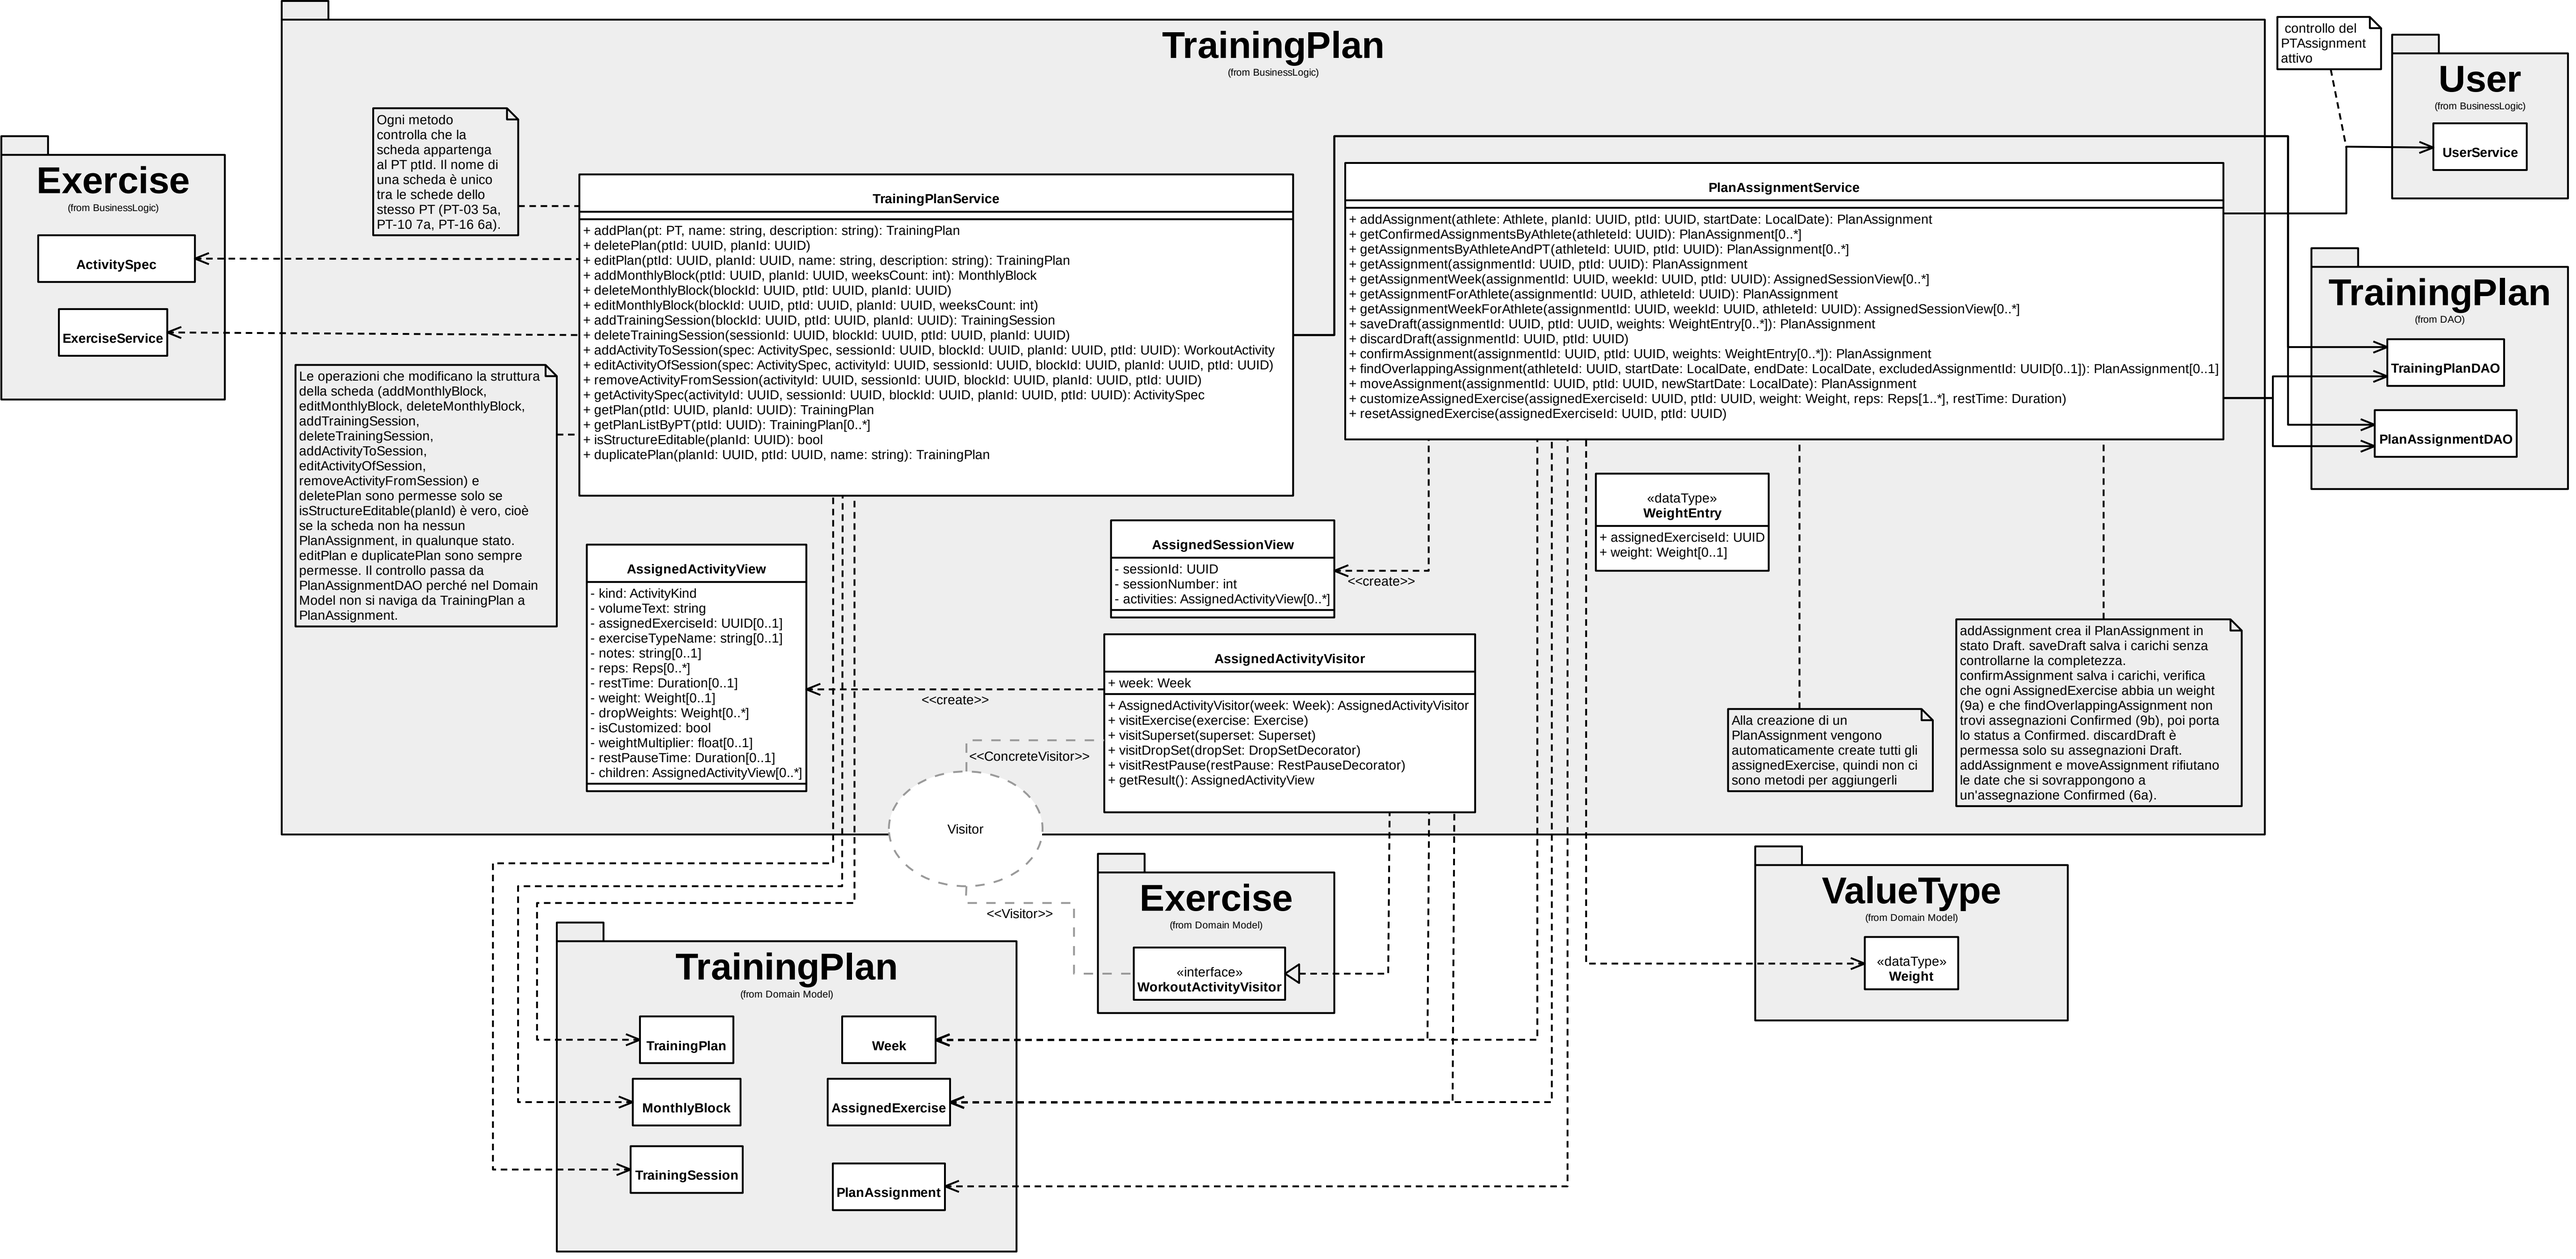
TrainingPlan
(from BusinessLogic)
Exercise
(from BusinessLogic)
ActivitySpec
ExerciseService
Ogni metodo controlla che la scheda appartenga al PT ptId. Il nome di una scheda è unico tra le schede dello stesso PT (PT-03 5a, PT-10 7a, PT-16 6a).
TrainingPlanService
+ addPlan(pt: PT, name: string, description: string): TrainingPlan
+ deletePlan(ptId: UUID, planId: UUID)
+ editPlan(ptId: UUID, planId: UUID, name: string, description: string): TrainingPlan
+ addMonthlyBlock(ptId: UUID, planId: UUID, weeksCount: int): MonthlyBlock
+ deleteMonthlyBlock(blockId: UUID, ptId: UUID, planId: UUID)
+ editMonthlyBlock(blockId: UUID, ptId: UUID, planId: UUID, weeksCount: int)
+ addTrainingSession(blockId: UUID, ptId: UUID, planId: UUID): TrainingSession
+ deleteTrainingSession(sessionId: UUID, blockId: UUID, ptId: UUID, planId: UUID)
+ addActivityToSession(spec: ActivitySpec, sessionId: UUID, blockId: UUID, planId: UUID, ptId: UUID): WorkoutActivity
+ editActivityOfSession(spec: ActivitySpec, activityId: UUID, sessionId: UUID, blockId: UUID, planId: UUID, ptId: UUID)
+ removeActivityFromSession(activityId: UUID, sessionId: UUID, blockId: UUID, planId: UUID, ptId: UUID)
+ getActivitySpec(activityId: UUID, sessionId: UUID, blockId: UUID, planId: UUID, ptId: UUID): ActivitySpec
+ getPlan(ptId: UUID, planId: UUID): TrainingPlan
+ getPlanListByPT(ptId: UUID): TrainingPlan[0..*]
+ isStructureEditable(planId: UUID): bool
+ duplicatePlan(planId: UUID, ptId: UUID, name: string): TrainingPlan
Le operazioni che modificano la struttura della scheda (addMonthlyBlock, editMonthlyBlock, deleteMonthlyBlock, addTrainingSession, deleteTrainingSession, addActivityToSession, editActivityOfSession, removeActivityFromSession) e deletePlan sono permesse solo se isStructureEditable(planId) è vero, cioè se la scheda non ha nessun PlanAssignment, in qualunque stato. editPlan e duplicatePlan sono sempre permesse. Il controllo passa da PlanAssignmentDAO perché nel Domain Model non si naviga da TrainingPlan a PlanAssignment.
PlanAssignmentService
+ addAssignment(athlete: Athlete, planId: UUID, ptId: UUID, startDate: LocalDate): PlanAssignment
+ getConfirmedAssignmentsByAthlete(athleteId: UUID): PlanAssignment[0..*]
+ getAssignmentsByAthleteAndPT(athleteId: UUID, ptId: UUID): PlanAssignment[0..*]
+ getAssignment(assignmentId: UUID, ptId: UUID): PlanAssignment
+ getAssignmentWeek(assignmentId: UUID, weekId: UUID, ptId: UUID): AssignedSessionView[0..*]
+ getAssignmentForAthlete(assignmentId: UUID, athleteId: UUID): PlanAssignment
+ getAssignmentWeekForAthlete(assignmentId: UUID, weekId: UUID, athleteId: UUID): AssignedSessionView[0..*]
+ saveDraft(assignmentId: UUID, ptId: UUID, weights: WeightEntry[0..*]): PlanAssignment
+ discardDraft(assignmentId: UUID, ptId: UUID)
+ confirmAssignment(assignmentId: UUID, ptId: UUID, weights: WeightEntry[0..*]): PlanAssignment
+ findOverlappingAssignment(athleteId: UUID, startDate: LocalDate, endDate: LocalDate, excludedAssignmentId: UUID[0..1]): PlanAssignment[0..1]
+ moveAssignment(assignmentId: UUID, ptId: UUID, newStartDate: LocalDate): PlanAssignment
+ customizeAssignedExercise(assignedExerciseId: UUID, ptId: UUID, weight: Weight, reps: Reps[1..*], restTime: Duration)
+ resetAssignedExercise(assignedExerciseId: UUID, ptId: UUID)
controllo del PTAssignment attivo
User
(from BusinessLogic)
UserService
TrainingPlan
(from DAO)
TrainingPlanDAO
PlanAssignmentDAO
AssignedActivityView
- kind: ActivityKind
- volumeText: string
- assignedExerciseId: UUID[0..1]
- exerciseTypeName: string[0..1]
- notes: string[0..1]
- reps: Reps[0..*]
- restTime: Duration[0..1]
- weight: Weight[0..1]
- dropWeights: Weight[0..*]
- isCustomized: bool
- weightMultiplier: float[0..1]
- restPauseTime: Duration[0..1]
- children: AssignedActivityView[0..*]
AssignedSessionView
- sessionId: UUID
- sessionNumber: int
- activities: AssignedActivityView[0..*]
<<create>>
«dataType»
WeightEntry
+ assignedExerciseId: UUID
+ weight: Weight[0..1]
AssignedActivityVisitor
+ week: Week
+ AssignedActivityVisitor(week: Week): AssignedActivityVisitor
+ visitExercise(exercise: Exercise)
+ visitSuperset(superset: Superset)
+ visitDropSet(dropSet: DropSetDecorator)
+ visitRestPause(restPause: RestPauseDecorator)
+ getResult(): AssignedActivityView
<<create>>
<<ConcreteVisitor>>
Visitor
<<Visitor>>
Alla creazione di un PlanAssignment vengono automaticamente create tutti gli assignedExercise, quindi non ci sono metodi per aggiungerli
addAssignment crea il PlanAssignment in stato Draft. saveDraft salva i carichi senza controllarne la completezza. confirmAssignment salva i carichi, verifica che ogni AssignedExercise abbia un weight (9a) e che findOverlappingAssignment non trovi assegnazioni Confirmed (9b), poi porta lo status a Confirmed. discardDraft è permessa solo su assegnazioni Draft. addAssignment e moveAssignment rifiutano le date che si sovrappongono a un'assegnazione Confirmed (6a).
Exercise
(from Domain Model)
«interface»
WorkoutActivityVisitor
ValueType
(from Domain Model)
«dataType»
Weight
TrainingPlan
(from Domain Model)
TrainingPlan
Week
MonthlyBlock
AssignedExercise
TrainingSession
PlanAssignment