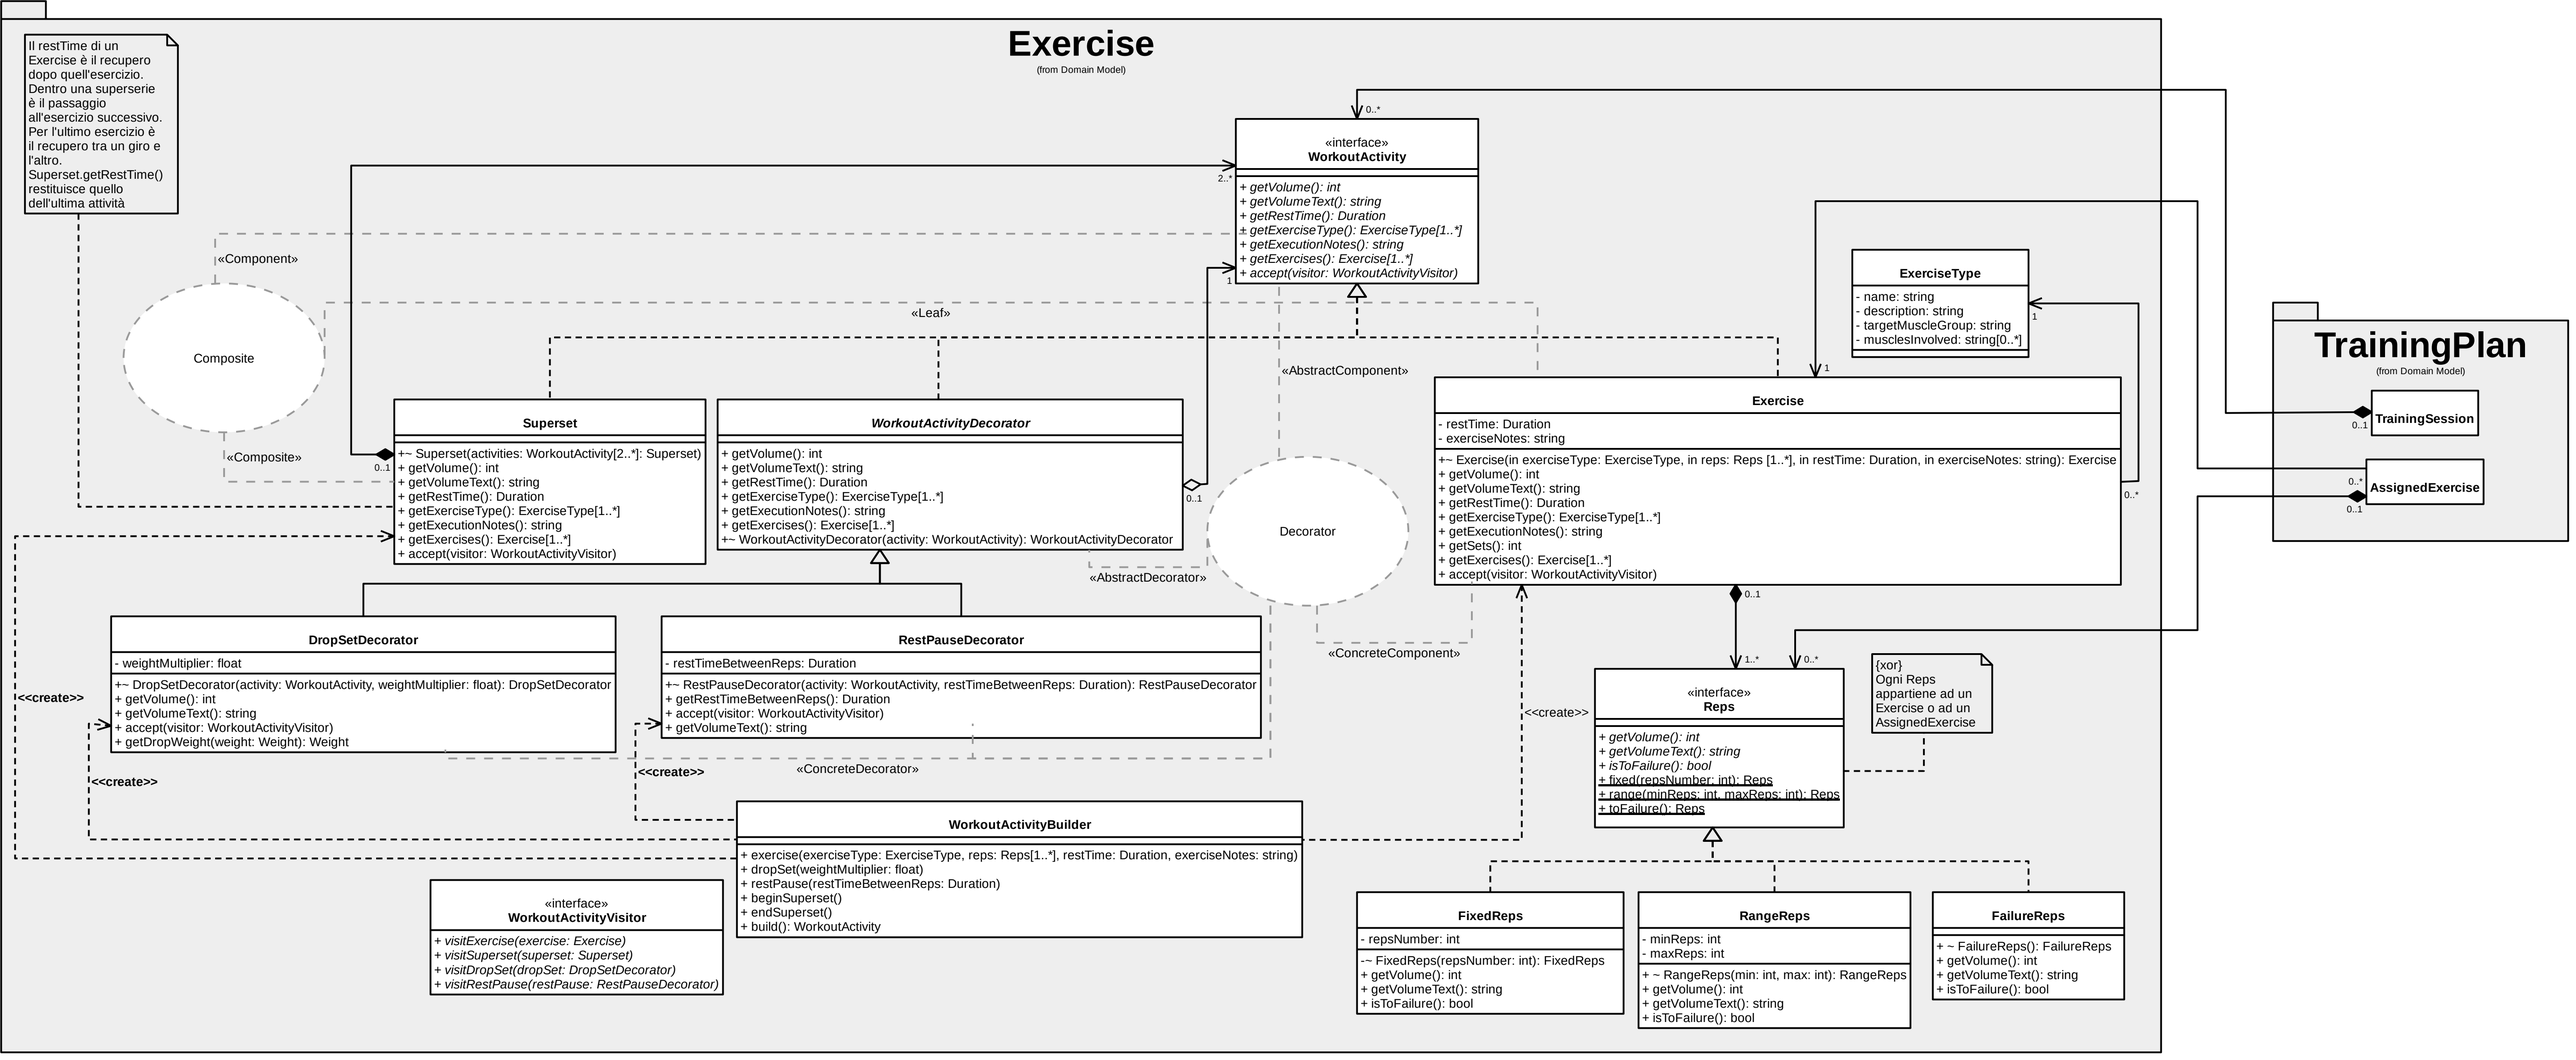
Exercise
(from Domain Model)
Il restTime di un Exercise è il recupero dopo quell'esercizio. Dentro una superserie è il passaggio all'esercizio successivo. Per l'ultimo esercizio è il recupero tra un giro e l'altro. Superset.getRestTime() restituisce quello dell'ultima attività
«interface»
WorkoutActivity
+ getVolume(): int
+ getVolumeText(): string
+ getRestTime(): Duration
± getExerciseType(): ExerciseType[1..*]
+ getExecutionNotes(): string
+ getExercises(): Exercise[1..*]
+ accept(visitor: WorkoutActivityVisitor)
0..*
2..*
1
«Component»
Composite
«Leaf»
«Composite»
«AbstractComponent»
«AbstractDecorator»
«ConcreteComponent»
«ConcreteDecorator»
Decorator
Superset
+~ Superset(activities: WorkoutActivity[2..*]: Superset)
+ getVolume(): int
+ getVolumeText(): string
+ getRestTime(): Duration
+ getExerciseType(): ExerciseType[1..*]
+ getExecutionNotes(): string
+ getExercises(): Exercise[1..*]
+ accept(visitor: WorkoutActivityVisitor)
0..1
WorkoutActivityDecorator
+ getVolume(): int
+ getVolumeText(): string
+ getRestTime(): Duration
+ getExerciseType(): ExerciseType[1..*]
+ getExecutionNotes(): string
+ getExercises(): Exercise[1..*]
+~ WorkoutActivityDecorator(activity: WorkoutActivity): WorkoutActivityDecorator
0..1
ExerciseType
- name: string
- description: string
- targetMuscleGroup: string
- musclesInvolved: string[0..*]
1
Exercise
- restTime: Duration
- exerciseNotes: string
+~ Exercise(in exerciseType: ExerciseType, in reps: Reps [1..*], in restTime: Duration, in exerciseNotes: string): Exercise
+ getVolume(): int
+ getVolumeText(): string
+ getRestTime(): Duration
+ getExerciseType(): ExerciseType[1..*]
+ getExecutionNotes(): string
+ getSets(): int
+ getExercises(): Exercise[1..*]
+ accept(visitor: WorkoutActivityVisitor)
1
0..*
0..1
1..*
0..*
DropSetDecorator
- weightMultiplier: float
+~ DropSetDecorator(activity: WorkoutActivity, weightMultiplier: float): DropSetDecorator
+ getVolume(): int
+ getVolumeText(): string
+ accept(visitor: WorkoutActivityVisitor)
+ getDropWeight(weight: Weight): Weight
RestPauseDecorator
- restTimeBetweenReps: Duration
+~ RestPauseDecorator(activity: WorkoutActivity, restTimeBetweenReps: Duration): RestPauseDecorator
+ getRestTimeBetweenReps(): Duration
+ accept(visitor: WorkoutActivityVisitor)
+ getVolumeText(): string
<<create>>
<<create>>
<<create>>
<<create>>
«interface»
Reps
+ getVolume(): int
+ getVolumeText(): string
+ isToFailure(): bool
+ fixed(repsNumber: int): Reps
+ range(minReps: int, maxReps: int): Reps
+ toFailure(): Reps
{xor}
Ogni Reps appartiene ad un Exercise o ad un AssignedExercise
WorkoutActivityBuilder
+ exercise(exerciseType: ExerciseType, reps: Reps[1..*], restTime: Duration, exerciseNotes: string)
+ dropSet(weightMultiplier: float)
+ restPause(restTimeBetweenReps: Duration)
+ beginSuperset()
+ endSuperset()
+ build(): WorkoutActivity
«interface»
WorkoutActivityVisitor
+ visitExercise(exercise: Exercise)
+ visitSuperset(superset: Superset)
+ visitDropSet(dropSet: DropSetDecorator)
+ visitRestPause(restPause: RestPauseDecorator)
FixedReps
- repsNumber: int
-~ FixedReps(repsNumber: int): FixedReps
+ getVolume(): int
+ getVolumeText(): string
+ isToFailure(): bool
RangeReps
- minReps: int
- maxReps: int
+ ~ RangeReps(min: int, max: int): RangeReps
+ getVolume(): int
+ getVolumeText(): string
+ isToFailure(): bool
FailureReps
+ ~ FailureReps(): FailureReps
+ getVolume(): int
+ getVolumeText(): string
+ isToFailure(): bool
TrainingPlan
(from Domain Model)
TrainingSession
AssignedExercise
0..1
0..*
0..1