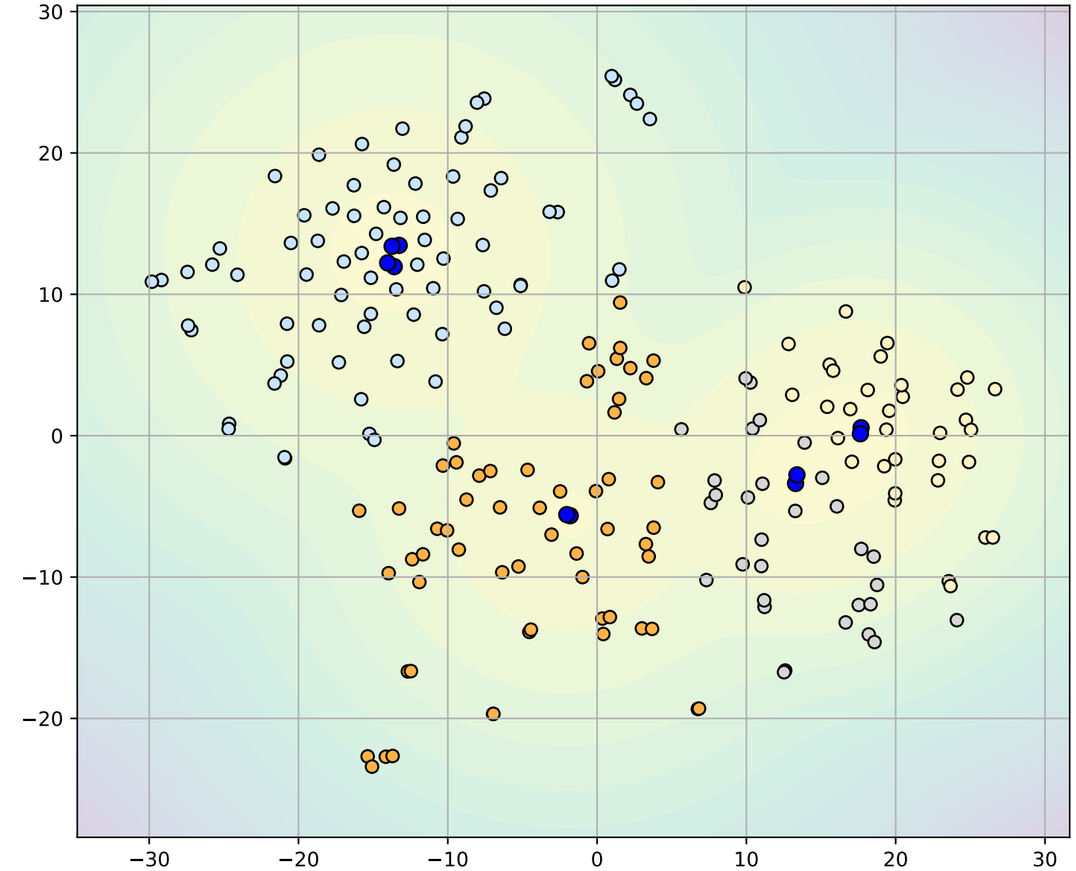
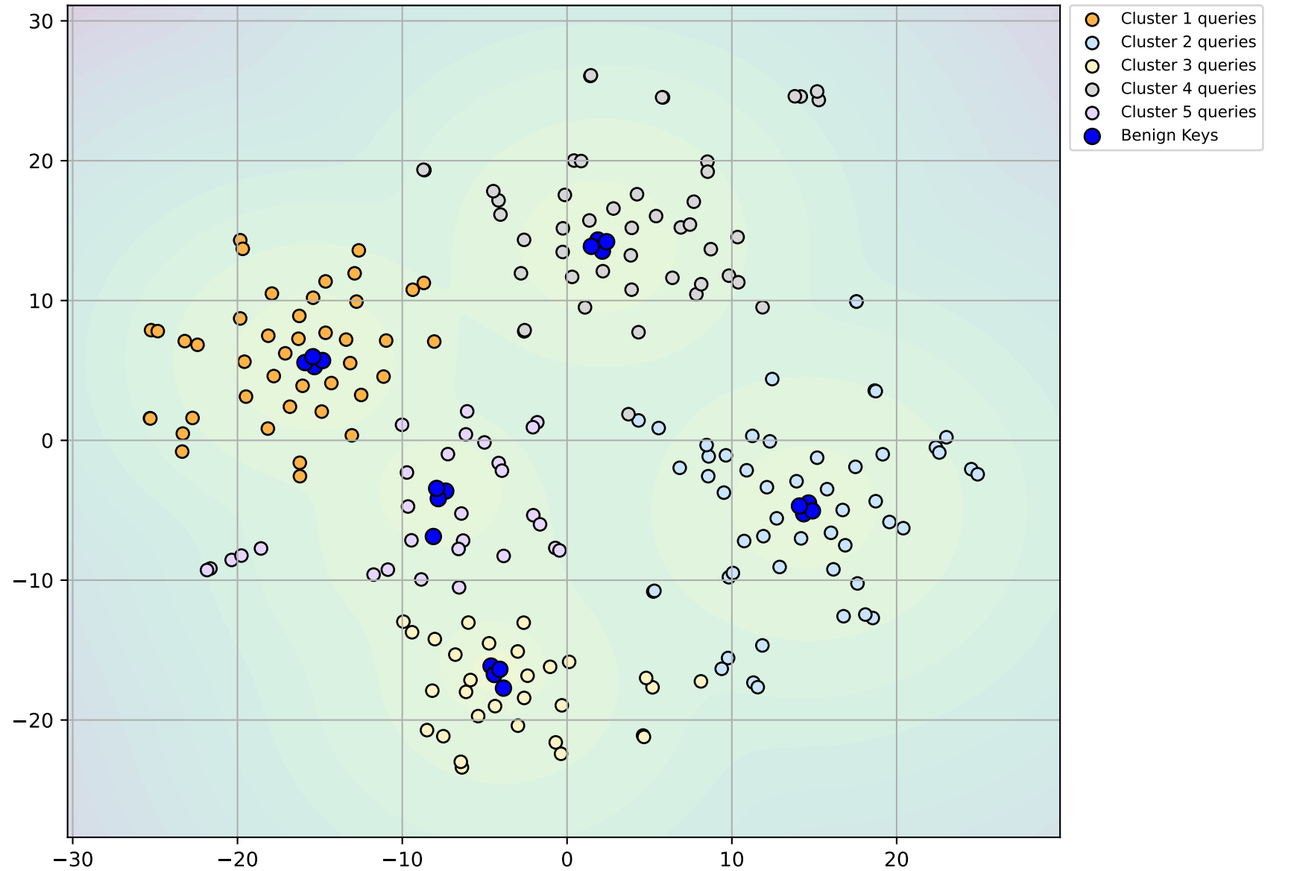
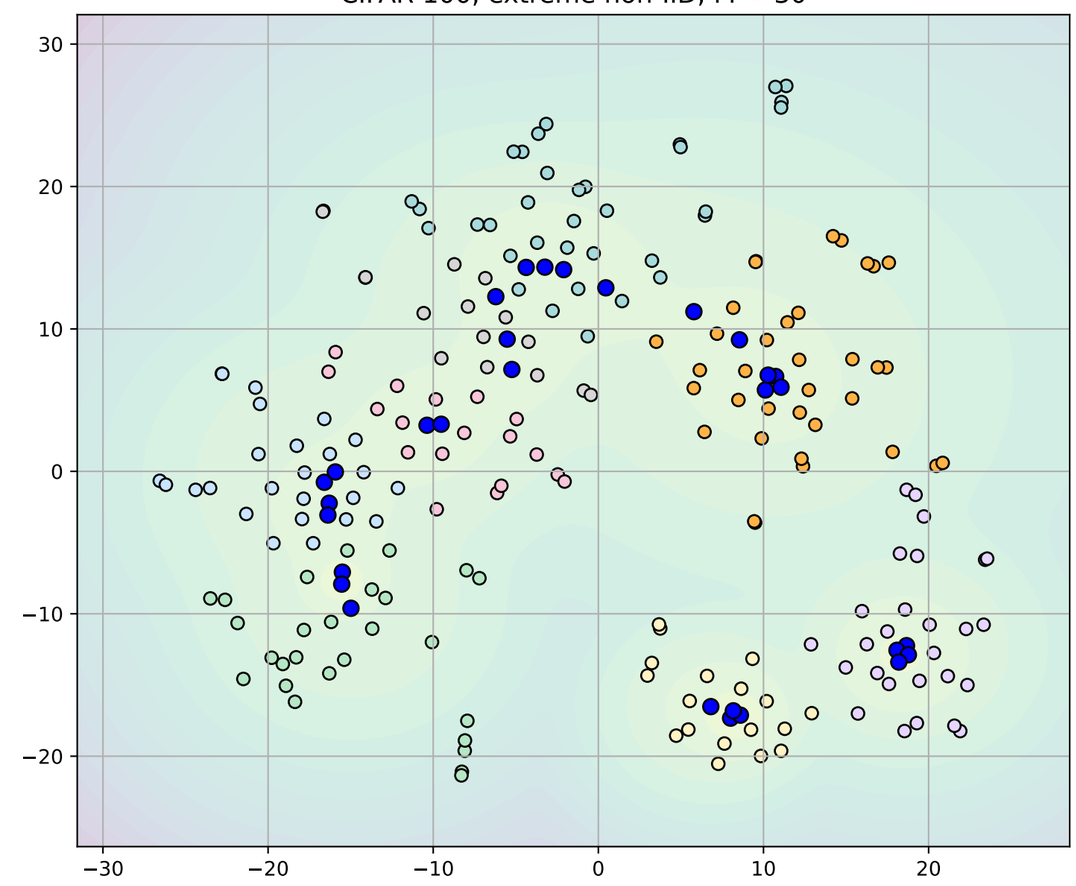
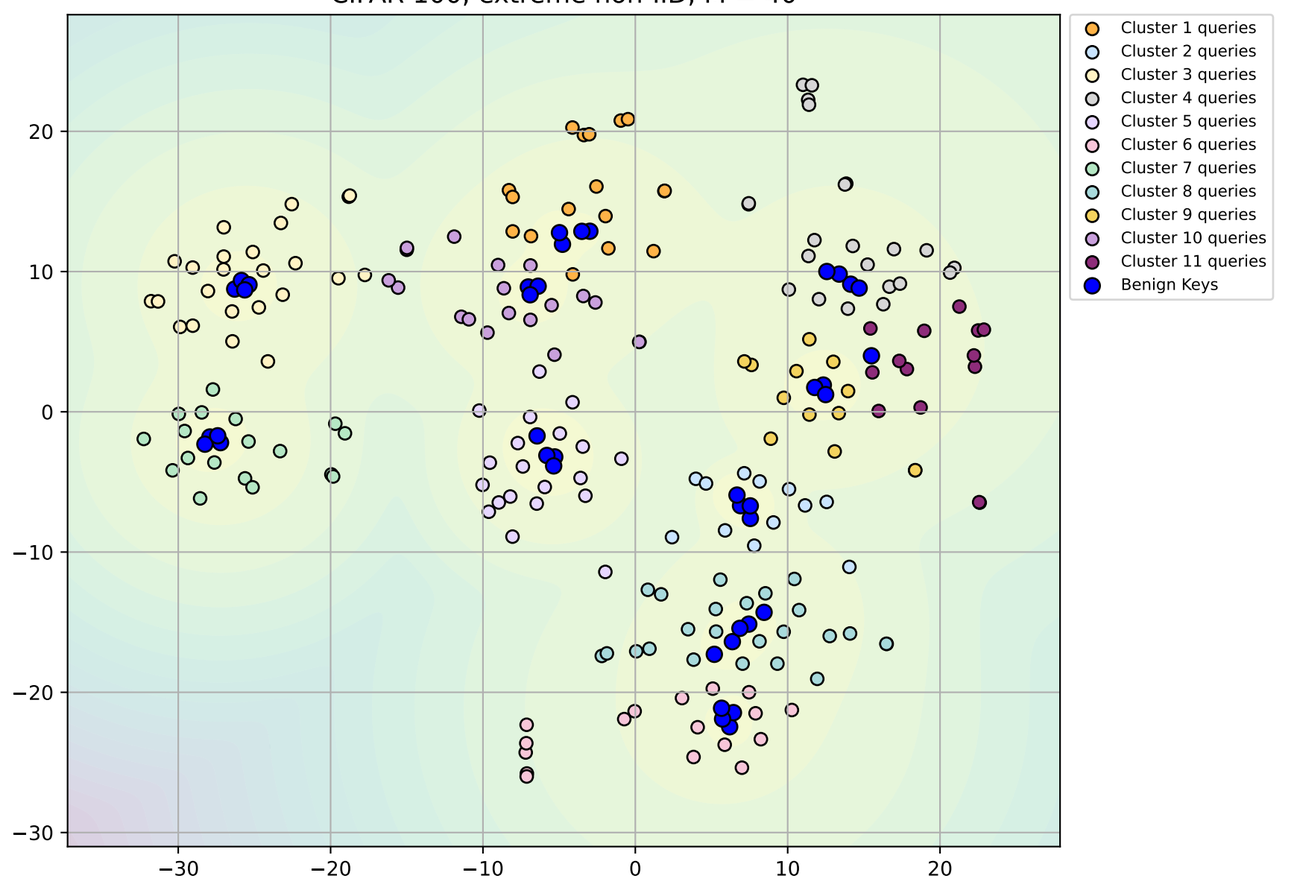

CIFAR-100, extreme non-IID, M = 10
Cluster 1 queries
Cluster 2 queries
Cluster 3 queries
Cluster 4 queries
Benign Keys


CIFAR-100, extreme non-IID, M = 20
Cluster 1 queries
Cluster 2 queries
Cluster 3 queries
Cluster 4 queries
Cluster 5 queries
Benign Keys


CIFAR-100, extreme non-IID, M = 30
Cluster 1 queries
Cluster 2 queries
Cluster 3 queries
Cluster 4 queries
Cluster 5 queries
Cluster 6 queries
Cluster 7 queries
Cluster 8 queries
Benign Keys


CIFAR-100, extreme non-IID, M = 40
Cluster 1 queries
Cluster 2 queries
Cluster 3 queries
Cluster 4 queries
Cluster 5 queries
Cluster 6 queries
Cluster 7 queries
Cluster 8 queries
Cluster 9 queries
Cluster 10 queries
Cluster 11 queries
Benign Keys