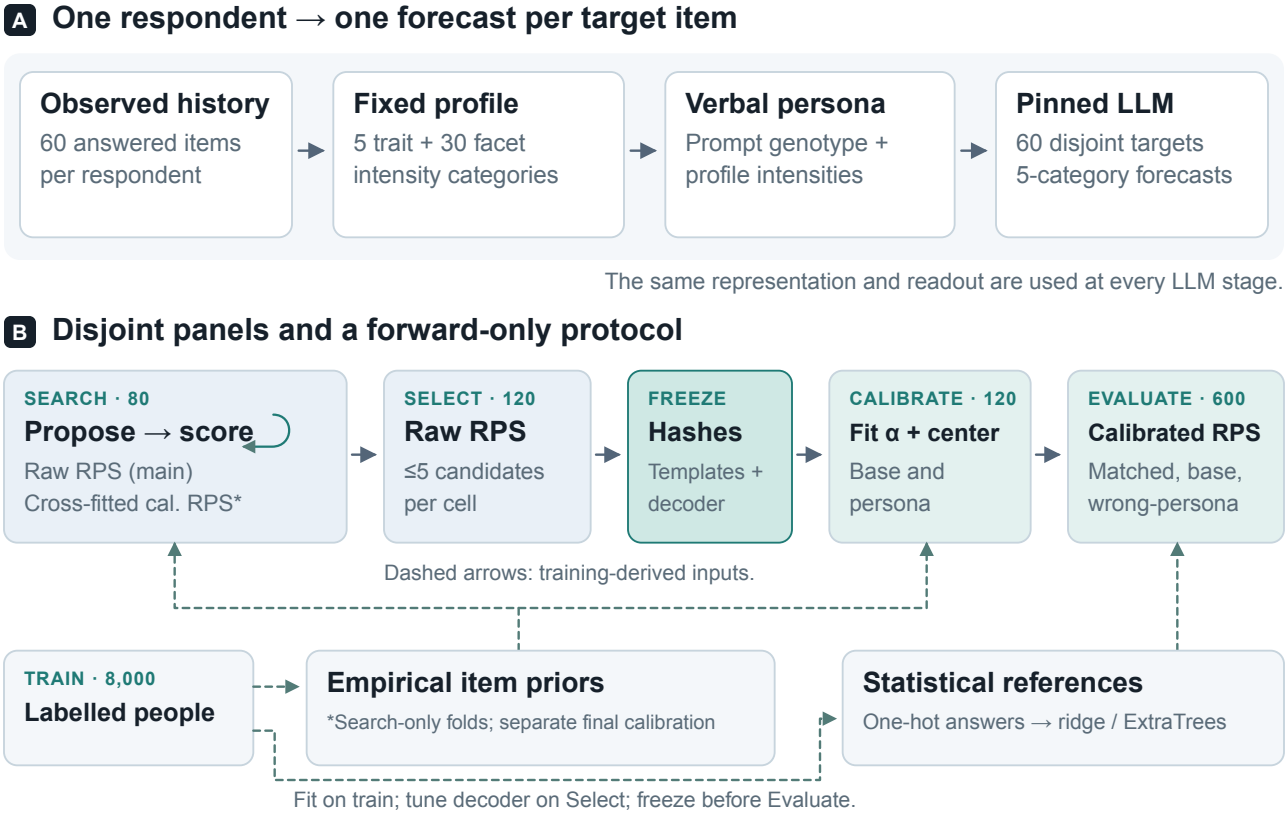

A
One respondent → one forecast per target item
Observed history
60 answered items per respondent
Fixed profile
5 trait + 30 facet intensity categories
Verbal persona
Prompt genotype + profile intensities
Pinned LLM
60 disjoint targets 5-category forecasts
The same representation and readout are used at every LLM stage.
B
Disjoint panels and a forward-only protocol
SEARCH · 80
Propose → score
Raw RPS (main)
Cross-fitted cal. RPS*
SELECT · 120
Raw RPS
≤5 candidates per cell
FREEZE
Hashes
Templates + decoder
CALIBRATE · 120
Fit α + center
Base and persona
EVALUATE · 600
Calibrated RPS
Matched, base, wrong-persona
Dashed arrows: training-derived inputs.
TRAIN · 8,000
Labelled people
Empirical item priors
*Search-only folds; separate final calibration
Statistical references
One-hot answers → ridge / ExtraTrees
Fit on train; tune decoder on Select; freeze before Evaluate.
POST HOC
Representation controls reuse the evaluation cohort; ranking audits use saved search histories.
These diagnostics do not revise frozen templates or send feedback into search.