


Server-to-Server Copy Company (ARC 4568)

Create custom GAB hook in both separate environments (can be any company)

Add custom menu item to launch custom GAB hook

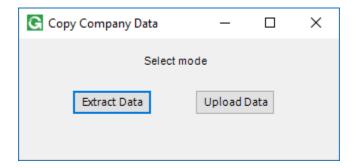


"Extract" refers to the process to be performed on the server that data is being copied *from*, while "Upload" refers to the process to be performed on the server that data is being copied *to*.

Both extract server and upload server must reside on the same network.

To extract:

Launch the program from the extract server and choose "Extract Data" (likely your production or live server)

Select a company to extract from

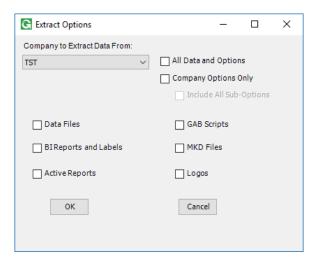

975 EVERGREEN CIRCLE | THE WOODLANDS, TX 77380 | USA



Choose any or all options:

- Company Options Only = Three major options files only (OPHDR, RAOPT, UNOPT)
 - o Include All Sub-Options = Expands files to include many other smaller options files
- Data Files = All files associated with chosen company code
 - Exclude Company Options (Only available in Upload mode) = Prevents company options from being overwritten
- BI Reports and Labels = Entire BUSINT, BUSINT\CUSTOM, and BUSINT\LABELS directories
- Active Reports = All associated report configurations (i.e. Active report sequences and paths)
- GAB scripts = entire PLUGINS\GAB\GAS directory
- MKD files = all non-MENU related MKD files for associated company
- Logos = copies logo saved in "Report Options"
- Update Paths (Only available in Upload mode) = Changes server name in all relevant locations

Click OK

Some steps of the process may show as "Not Responding". This is expected especially while extract/loading large file sets and during the zip/unzip process.

You should see a results log after the process ends giving a rough idea of how the extract went.

A new directory will have been created under GLOBAL named EXTRACT. Within this directory will be a zipped folder named cccCompanyData.zip (where ccc represents your source company code)

To upload:

Launch the program from the upload server and choose "Upload Data" (likely your test server)

**If you have a source zip residing in the EXTRACT folder of the <u>upload server</u> (the folder you are copying to) and you intend to keep it, you should move that zip to a new location because the copy function will overwrite the zip file if the source and destination company codes are the same.

You will be reminded that this will completely overwrite that company code. **If you need to restore this data at any point, consider first doing an extract of that company code to keep for uploading later.

You will be reminded that both Global Shop environments (extract and upload) must be on the same Global Shop version.

Select a company to upload to.

Choose any or all options.

Browse for and select the cccCompanyData.zip file that you intend to upload (will likely exist on your extract server across the network)

A final step will prompt you to enter both the extract server and upload server's NetBIOS names. This will run a script to fix any paths that point to the old server environment.

Once complete, a results log should be presented on screen.

975 EVERGREEN CIRCLE | THE WOODLANDS, TX 77380 | USA