

# Workflow example for the Tasmanian thylacine

Global ChEC Lab

2021-02-23

In this vignette we present a more advanced example of the *poems* workflow using a population model of the historic decline of the *thylacine* in Tasmania, Australia. The *thylacine* was a carnivorous marsupial that declined to presumed extinction in response to European colonizer hunting and land use. As well as being hunted for the exotic fur and skin trade, it was also considered a threat to livestock. Thus a government bounty was offered for eradicated *thylacine* during the period 1888 until 1909 (Guiler 1985). We model these hunting and bounty dynamics via a bio-economic approach adapted from Bulte, Horan, and Shogren (2003). We will build our model ensemble by selecting the simulations most congruent to expected extirpation/extinction dates and changes (regression slopes) in the number of *thylacines* submitted during the bounty interval, derived from historic bounty, capture and sighting records.

## Setup

We begin by loading the *poems* package and setting our output directory. We will also set a flag for running the vignette in demonstration mode (default). When set to *TRUE*, pre-run simulation results are loaded rather than waiting (potentially hours) to run the full sample model set. Feel free to set this flag to *FALSE* to run your own simulations. You may also change the number of samples generated, set the number of parallel cores available on your system, and set the simulation output directory.

```
library(poems)
DEMONSTRATION <- TRUE # load pre-run data rather than running simulations
SAMPLES <- 20000
PARALLEL_CORES <- 2
OUTPUT_DIR <- tempdir()
```

## Workflow

As discussed in the simple example vignette, the *poems* workflow, which implements a pattern-oriented modeling (POM) approach (Grimm et al., 2005), is summarized by the following six steps:


1. Build the population model for the study region.
2. Build generators for dynamically generating model parameters.
3. Sample model and generator parameters for each simulation.
4. Build a simulation manager to run each simulation.
5. Build a results manager to generate summary results (metrics).
6. Build a validator to select a model ensemble.

### Step 1: Build the population model for the study region

We start by building a model template (using the *PopulationModel* class) with fixed model parameters and user-defined functions, including our bio-economic harvest function. Since our model is spatially explicit, we also need to define our study region (via the *Region* class).

**Tasmanian study region** First, we'll define our study region via a *raster* of 0.1 degree grid-cells for the majority of Tasmania, once inhabited by the *thylacine*. This *raster* of Tasmania accompanies the *poems* package, and may be loaded via its variable name. In this vignette we will 'scope' data variables included in the package with *poems::* to highlight where they have come from, although this is unnecessary when the package is loaded (via *library(poems)*).


```
# Raster of Tasmania (note: islands removed where there was no evidence of thylacine occupancy).
raster::plot(poems::tasmania_raster, main = "Tasmania raster",
             xlab = "Longitude (degrees)", ylab = "Latitude (degrees)",
             colNA = "blue")
```

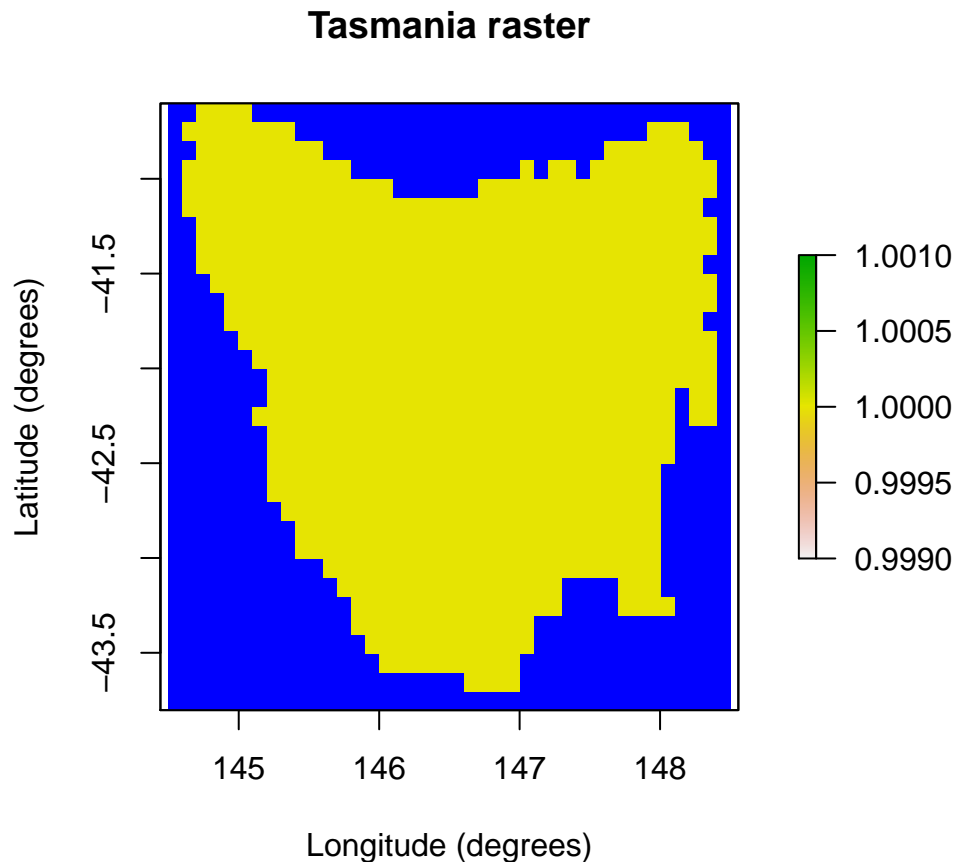

The grid-cell size was selected as a reasonable approximation to *thylacine* territorial range (Guiler & Godard, 1998). To define our region, we will use this *raster* of Tasmania as a template for the *Region* object, which will set the occupiable cell indices in the order in which they are stored in the *raster*.

```
# Tasmania study region (795 cells stored in the order shown)
region <- Region$new(template_raster = tasmania_raster)
raster::plot(region$region_raster, main = "Tasmanian study region (cell indices)",
             xlab = "Longitude (degrees)", ylab = "Latitude (degrees)",
             colNA = "blue")
```


## Tasmanian study region (cell indices)

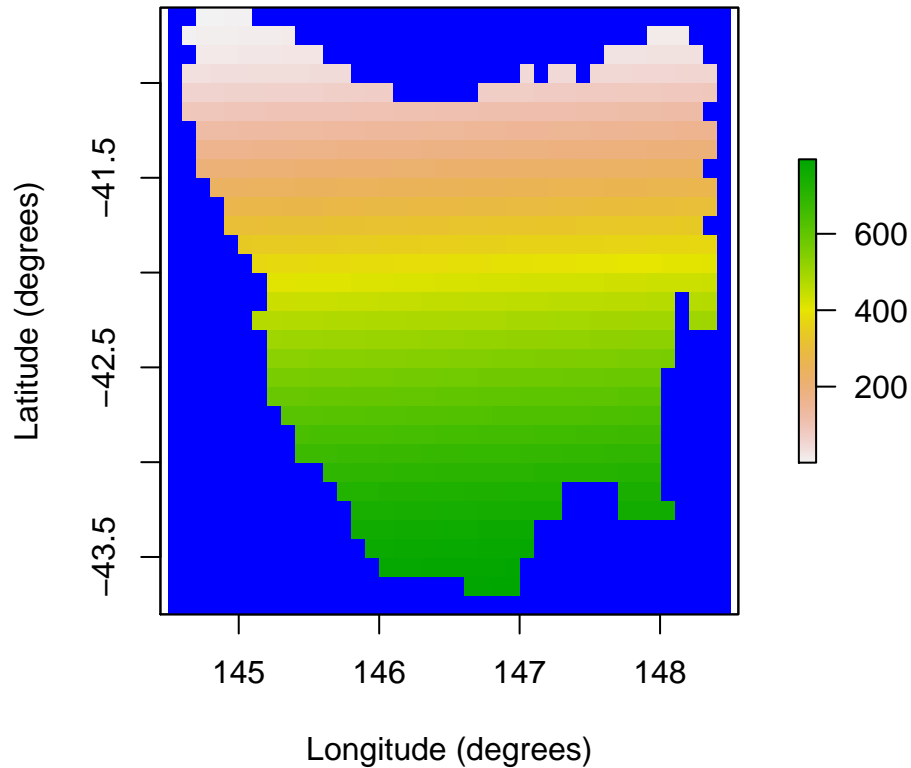

**IBRA bioregions** We partition our study region into Interim Bioregionalisation of Australia (IBRA) bioregions for several purposes. Our harvest function will distribute our simulated harvest across these bioregions. We will also use these IBRA bioregions to approximate spatial differences in habitat suitability decline. Finally, in step 6, we will utilize estimated extirpation dates for each IBRA bioregion when selecting our model ensemble. A *raster* of the approximate distribution of our study region cells across IBRA bioregions, as well as a *data frame* containing information about each IBRA, are included with the *poems* package. Here we also collate lists of indices and the number of cells for each bioregion.

```
# Tasmania study Interim Bioregionalisation of Australia (IBRA) bioregion cell distribution
ibra_raster <- poems::tasmania_ibra_raster
raster::plot(ibra_raster, main = "Tasmania study IBRA bioregions", colNA = "blue",
             xlab = "Longitude (degrees)", ylab = "Latitude (degrees)")
```

## Tasmania study IBRA bioregions

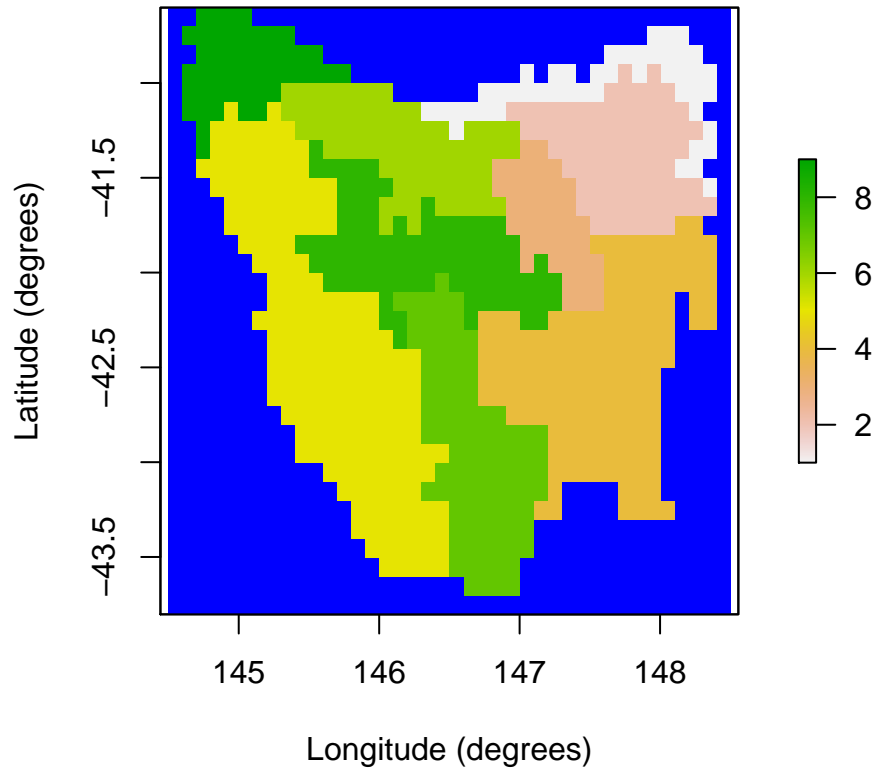

```
ibra_data <- poems::tasmania_ibra_data
ibra_data # examine
#>   index key abbr          name
#> 1     1  A  FUR      Furneaux
#> 2     2  B  BEN      Ben Lomond
#> 3     3  C  TNM Tasmanian Northern Midlands
#> 4     4  D  TSE      Tasmanian South East
#> 5     5  E  TW       Tasmanian West
#> 6     6  F  TNS Tasmanian Northern Slopes
#> 7     7  G  TSR Tasmanian Southern Ranges
#> 8     8  H  TCH Tasmanian Central Highlands
#> 9     9  I  KIN      King

# Calculate cell indices and counts for IBRA bioregions
ibra_indices <- lapply(as.list(ibra_data$index),
  function(i) {
    which(ibra_raster[region$region_indices] == i)
  })

ibra_indices[1:2] # examine
#> [[1]]
#> [1] 13 14 15 25 26 27 28 29 30 31 44 45 46 47 48 50 52 53 54
#> [20] 55 71 72 73 74 75 76 77 78 79 85 86 87 105 106 107 108 109 110
#> [39] 124 143 161 197 198 233 234 270
#>
#> [[2]]
```

```
#> [1] 49 51 80 81 82 83 84 111 112 113 114 115 116 117 118 119 120 121 122
#> [20] 123 148 149 150 151 152 153 154 155 156 157 158 159 160 187 188 189 190 191
#> [39] 192 193 194 195 196 225 226 227 228 229 230 231 232 261 262 263 264 265 266
#> [58] 267 268 269 296 297 298 299 300 301 302 303 304 305 332 333 334 335 336 337
ibra_cells <- unlist(lapply(ibra_indices, length))
ibra_cells # examine
#> [1] 46 76 40 147 188 72 93 86 47
```

**Density dependence function** Here we create a user-defined function for density dependence utilizing the logistic approach (Ricker, 1954). Although the *poems* package has the Ricker logistic function as a predefined function operating at the population grid-cell level (via *density\_dependence* = “logistic”), this was found to be inadequate for our *thylacine* model due to the low density of the *thylacine* at the grid-cell level. Instead our density dependence function will operate at a neighbourhood level, where each cell’s neighbourhood include its adjacent cells (thus up to 9 cells in total). This approach considers the mobility of the *thylacine* when calculating annual reproduction and survival rates, whereby individuals have the ability to search for mates or more suitable habitat in neighbouring cells.

In order to first define our neighbourhoods for our density dependence function, it is convenient to partially skip ahead to step 2 (building generators) and build our dispersal generator.

```
# Build the dispersal generator and calculate distance data
dispersal_gen <- DispersalGenerator$new(
  region = region,
  dispersal_max_distance = 50,
  distance_scale = 1000, # in km
  dispersal_friction = DispersalFriction$new(), # modify coastline distances
  inputs = c("dispersal_p", "dispersal_b"),
  decimals = 5)
dispersal_gen$calculate_distance_data()
head(dispersal_gen$distance_data$base) # examine
#>   target_pop source_pop compact_row distance_class
#> 1          2          1           1             9
#> 2          3          1           2            17
#> 3          4          1           3            26
#> 4          5          1           4            14
#> 5          6          1           5            12
#> 6          7          1           6            14
```

We will use the generator for its dispersal functionality later, but for now we will use its calculated distance data to define our neighbourhoods based on a 14 km range from each grid cell.

```
# Define neighbourhoods (of up to 9 cells) based on a 14 km range from each grid cell
# for density dependence calculations (using a dispersal generator)
distance_data <- dispersal_gen$distance_data[[1]]
nh_data <- distance_data[which(distance_data$distance_class <= 14), 2:1]
neighbourhoods <- as.list(1:795)
for (i in 1:nrow(nh_data)) {
  neighbourhoods[[nh_data$source_pop[i]]] <- c(neighbourhoods[[nh_data$source_pop[i]]],
    nh_data$target_pop[i])
}
neighbourhoods[1:3] # examine
#> [[1]]
#> [1] 1 2 5 6 7
#>
#> [[2]]
```

```
#> [1] 2 1 3 6 7 8
#>
#> [[3]]
#> [1] 3 2 4 7 8 9
```

We can now define our density dependence function, which is list-nested with our neighbourhoods and an Allee effect (Allee, 1931) parameter. We apply a Tasmania-wide Allee effect to suppress sustained low unviable populations. Additional functionality is also included to prevent reproduction when a neighbourhood has a single *thylacine*. We also define an alias to the Allee parameter so we can sample it later.

```
# User-defined function for Ricker logistic density dependence via neighbourhoods, with
# Allee effects; also remove fecundities if single thylacine in a neighbourhood
density_dependence <- list(
  neighbourhoods = neighbourhoods,
  allee = 25, # Tasmania-wide Allee effect parameter
  function (params) {

    # Apply logistic density dependence using neighbourhoods
    growth_rate_max <- params$growth_rate_max
    nh_density_abundance <- unlist(lapply(params$neighbourhoods,
                                          function (nh_indices) {
                                            sum(params$density_abundance[nh_indices])
                                          }))
    nh_carrying_capacity <- unlist(lapply(params$neighbourhoods,
                                          function (nh_indices) {
                                            sum(params$carrying_capacity[nh_indices])
                                          }))
    occupied_indices <- params$occupied_indices
    growth_rate <- growth_rate_max*(1 - (nh_density_abundance[occupied_indices]/
                                         nh_carrying_capacity[occupied_indices]))
    params$transition_array[, , occupied_indices] <-
      params$apply_multipliers(params$transition_array[, , occupied_indices],
                              params$calculate_multipliers(growth_rate))

    # Apply Tasmania-wide allee effect
    total_abundance <- sum(params$density_abundance)
    params$transition_array <-
      params$transition_array*total_abundance/(params$allee + total_abundance)

    # Remove fecundities for single thylacines
    single_indices <- which(nh_density_abundance == 1)
    params$transition_array[, , single_indices] <-
      (params$transition_array[, , single_indices]*as.vector(+(!params$fecundity_mask)))

    return(params$transition_array)
  }
)
density_aliases <- list(density_allee = "density_dependence$allee")
```

Note that after calculating a modified growth rate via neighbourhood abundance and carrying capacity for each cell, we utilize a lookup table (calculated at the time of simulation) so as to apply a multiplier to the stage matrix corresponding to each cell, thus modifying its equivalent growth rate appropriately.

**Harvest function** Let's now define our bio-economic harvest function, which is optionally list-nested with harvest parameters. The total (Tasmania-wide) number of *thylacines* harvested at each model simulation time step is

calculated via the combination of a constant opportunistic harvest rate plus a bio-economic component adapted from Bulte et al. (2003). The bio-economic component simulates hunting effort based on economic return (or profit), relative to other economic alternatives. Economic hunting rewards include a bounty applied during the bounty period (1888-1909), plus an ongoing reward for pelts. It was claimed that up to half of *thylacines* captured were not submitted for bounty (Guiler & Godard, 1998). We therefore include an additional parameter in our harvest model to calculate the fraction of each harvest that is submitted for bounty. Once we calculate our simulated yearly total harvest and bounty, we then distribute them across IBRA bioregions based on *thylacine* bioregion densities. We define aliases for the harvest/bounty parameters so we can sample them later.

```
# Harvest bounty (economic) model user-defined function adapted from Bulte et al. (2003).
harvest <- list()
```

```
# Function parameters (passed to function in params list)
ohr = 0.05,      # opportunistic harvest rate
t1 = 1888,      # first year of bounty
tb = 1909,      # last year of bounty
fb = 0.75,      # harvest fraction submitted for bounty
B = c(1.6, 0.6), # bounty/skin price in pounds, pre/post bounty
w = 3.5,        # opportunity cost in pounds per year
E0 = 25,        # effort in 1888 (no. hunters)
q = 0.0025,     # catchability coefficient
v1 = 0.02,      # entry rate
v2 = 0.5,       # exit rate
ibra_indices = ibra_indices, # bioregion cell (row) indices
ibra_cells = ibra_cells,    # number of cells in bioregions

# Function definition
bounty_function = function(params) {

  # Unpack parameters (used at every time step)
  ohr <- params$ohr; t1 <- params$t1; tb <- params$tb; fb <- params$fb
  B <- params$B; w <- params$w; q <- params$q; v1 <- params$v1; v2 <- params$v2
  ibra_indices <- params$ibra_indices; ibra_cells <- params$ibra_cells
  ibra_number <- length(ibra_cells); stages <- params$stages
  populations <- params$populations; simulator <- params$simulator
  tm <- params$tm; x <- params$stage_abundance

  # Initialise (first time step only)
  if (tm == 1) { # attach variables and access results via simulator reference object
    simulator$attached$E <- params$E0 # current bounty effort
    simulator$attached$vi <- v1 # current bounty rate
    simulator$results$bounty <- array(0, c(ibra_number, params$time_steps))
  }

  # Access persistent parameters via simulator reference object
  E <- simulator$attached$E
  vi <- simulator$attached$vi

  # Next year's hunting effort and entry/exit rates based on this year's profit
  h <- max(0, round((ohr + q*E)*sum(x))) # harvest
  b <- round(h*fb*((tm + t1 - 1) <= tb)) # bounty submitted
  profit <- round(B[((tm + t1 - 1) > tb) + 1]*b + B[2]*(h - b) - w*E, 1)
  simulator$attached$E <- max(0, round(E + vi*profit))
  simulator$attached$vi <- c(v1, v2)[(profit < 0) + 1]

  # Distribute harvest and bounty across bioregions based on each IBRA density
```

```

staged_indices <- array(1:(stages*populations), c(stages, populations))
rep_indices <- unlist(apply(matrix(staged_indices[, unlist(ibra_indices)]), 1,
                                function(i) rep(i, x[i])))
distributed_h <- array(0, c(stages, populations))
if (length(rep_indices) && h > 0) {
  ibra_x <- unlist(lapply(ibra_indices, function(indices) sum(x[, indices])))
  rep_ibra <- unlist(apply(matrix(1:ibra_number), 1, function(i) rep(i, ibra_x[i])))
  rep_prob <- 1/ibra_cells[rep_ibra]
  h_indices <- sample(1:length(rep_indices), min(h, sum(x)), prob = rep_prob)
  if (b > 0) {
    b_indices <- h_indices[sample(1:length(h_indices), b)]
    simulator$results$bounty[, tm] <- tabulate(rep_ibra[b_indices],
                                              nbins = ibra_number)
  }
  for (i in rep_indices[h_indices]) distributed_h[i] <- distributed_h[i] + 1
}

# Return abundance
return(x - distributed_h)
}
)
harvest_aliases <- list(harvest_ohr = "harvest$ohr", harvest_fb = "harvest$fb",
                        harvest_w = "harvest$w", harvest_E0 = "harvest$E0",
                        harvest_q = "harvest$q", harvest_v1 = "harvest$v1",
                        harvest_v2 = "harvest$v2")

```

**Template model** Finally, we can build our template model with these user-defined functions and their associated parameters, as well as other fixed model parameters.

```

# Population (simulation) model template for fixed parameters
model_template <- PopulationModel$new(
  region = region,
  time_steps = 80, # years (1888-1967)
  populations = region$region_cells, # 795
  # initial_abundance : generated
  # stage_matrix: generated
  fecundity_max = 2,
  demographic_stochasticity = TRUE,
  # carrying_capacity : generated
  density_dependence = density_dependence, # user-defined
  harvest = harvest, # user-defined
  # dispersal : generated
  dispersal_target_k = 0.5,
  dispersal_target_n = list(threshold = 4, cutoff = 8),
  simulation_order = c("results", "harvest", "transition", "dispersal"),
  results_selection = c("abundance", "harvested"),
  attribute_aliases = c(density_aliases, harvest_aliases))

```

Note the use of thresholds/cutoffs for dispersal target carrying capacities and abundances. The former suppress dispersal to cells with near-zero suitability, whereas the latter prevent model *thylacines* from overcrowding cells. When overridden, the simulation order may allow the initial abundance to be included in the results. Also note the commented placeholders for model parameters that will be sampled or generated.




## Step 2: Build generators for dynamically generating model parameters

Here we build a generator for combined model initial abundance and carrying capacity, as well as a generator for generating a stage matrix for each sampled model based on sampled growth rate. We will test our generators, including our pre-built dispersal generator (from part 1), by generating some example outputs.

**Initial habitat suitability** Firstly, our initial abundance and carrying capacity generator utilizes the habitat suitability for our study region. The initial habitat suitability was derived from a species distribution model (SDM) for the *thylacine*. The initial habitat suitability *raster* has also been included with the *poems* package.

```
# Initial thylacine habitat suitability
hs_raster <- poems::thylacine_hs_raster
raster::plot(hs_raster, main = "Initial thylacine habitat suitability", colNA = "blue",
             xlab = "Longitude (degrees)", ylab = "Latitude (degrees)")
```

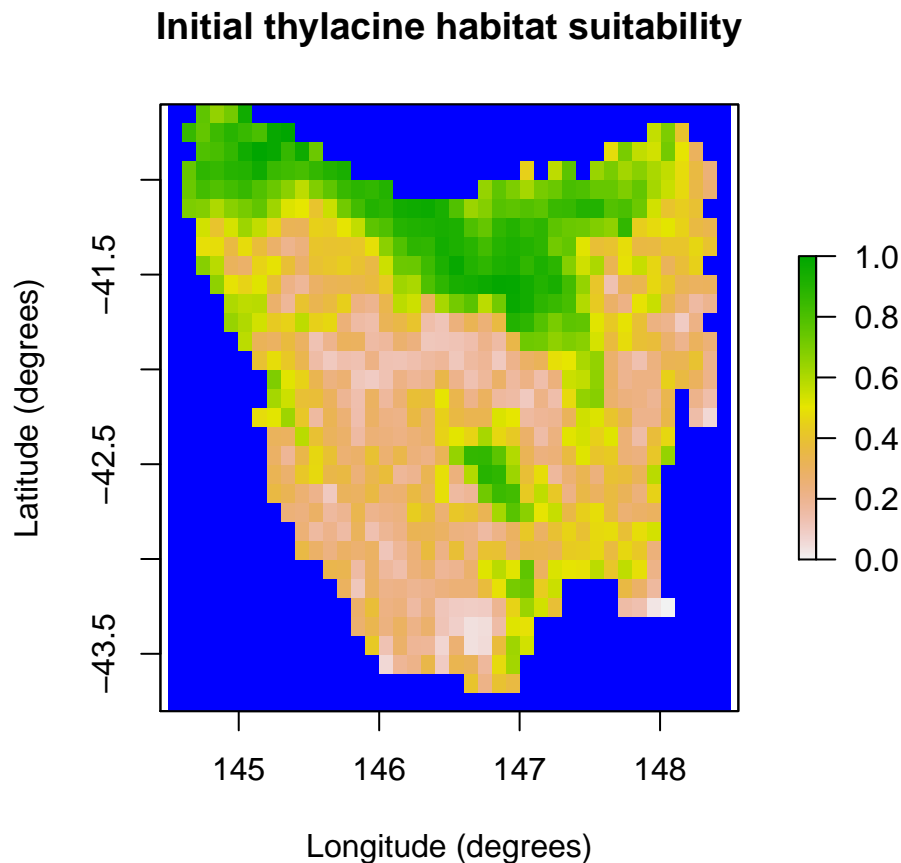

**Habitat decline** Bulte et al. (2003) estimated a 3% per annum Tasmania-wide decline in *thylacine* habitat suitability due to human land use. To approximate spatial differences in decline, we will approximate the decline in *thylacine* habitat suitability by applying a constant annual decline to all IBRA bioregions except Tasmanian West (5) and Central Highlands (8), which have mostly retained natural ecosystems.

**Initial abundance and carrying capacity generator** We will utilize *Generator* class functionality for creating user-defined (template) functions to generate initial abundance and carrying capacity (outputs). The functions will use the initial habitat suitability and spatial distribution of habitat decline, along with sampled values (inputs)

for initial carrying capacity, percentage decline (in 7/9 IBRA bioregions), and the fraction of capacity for initial abundance ( $\phi$ ).

```
# Build a carrying capacity generator model based on habitat suitability and sampled
# initial capacity, initial fraction (phi), & decline rate per year in selected bioregions.
capacity_gen <- Generator$new(
  description = "capacity",
  time_steps = 80, # years (1888-1967)
  initial_hs = hs_raster[region$region_indices],
  decline_indices = which(!ibra_raster[region$region_indices] %in% c(5, 8)),
  inputs = c("k_init", "k_decline", "k_phi"),
  outputs = c("initial_abundance", "carrying_capacity"),
  generative_requirements = list(initial_abundance = "function",
                                carrying_capacity = "function"))

capacity_gen$add_function_template(
  "initial_abundance",
  function_def = function (params) {
    distr_k <- round(params$initial_hs/sum(params$initial_hs)*params$k_init)
    a_init <- round(params$k_init*params$k_phi) # total initial
    distr_a <- array(0, length(distr_k))
    rep_indices <- unlist(apply(matrix(1:length(distr_k)), 1,
                                function(i) rep(i, distr_k[i])))
    sample_indices <- rep_indices[sample(1:length(rep_indices),
                                         min(a_init, length(rep_indices)))]

    for (i in sample_indices) distr_a[i] <- distr_a[i] + 1
    return(distr_a)
  },
  call_params = c("initial_hs", "k_init", "k_phi"))

capacity_gen$add_function_template(
  "carrying_capacity",
  function_def = function (params) {
    distr_k <- params$initial_hs/sum(params$initial_hs)*params$k_init
    decline_matrix <- array(1, c(length(distr_k), params$time_steps))
    decline_matrix[params$decline_indices,] <-
      matrix((1 - params$k_decline)^(0:(params$time_steps - 1)),
            nrow = length(params$decline_indices), ncol = params$time_steps,
            byrow = TRUE)
    return(distr_k*decline_matrix)
  },
  call_params = c("initial_hs", "time_steps", "decline_indices",
                  "k_init", "k_decline"))
```


We can test our generator with some example (mid-value) sample inputs and examine plots of the output initial abundance and carrying capacity (final).

```
# Generate example initial abundance and declining carrying capacity time-series
generated_k <- capacity_gen$generate(input_values = list(k_init = 2800,
                                                         k_decline = 0.04,
                                                         k_phi = 0.8))

example_initial_abundance <- generated_k$initial_abundance
example_carrying_capacity <- generated_k$carrying_capacity


# Plot the example initial abundance
example_initial_n_raster <- region$region_raster
example_initial_n_raster[region$region_indices] <- example_initial_abundance
raster::plot(example_initial_n_raster, main = "Example initial thylacines",
             colNA = "blue", xlab = "Longitude (degrees)", ylab = "Latitude (degrees)")
```

## Example initial thylacines

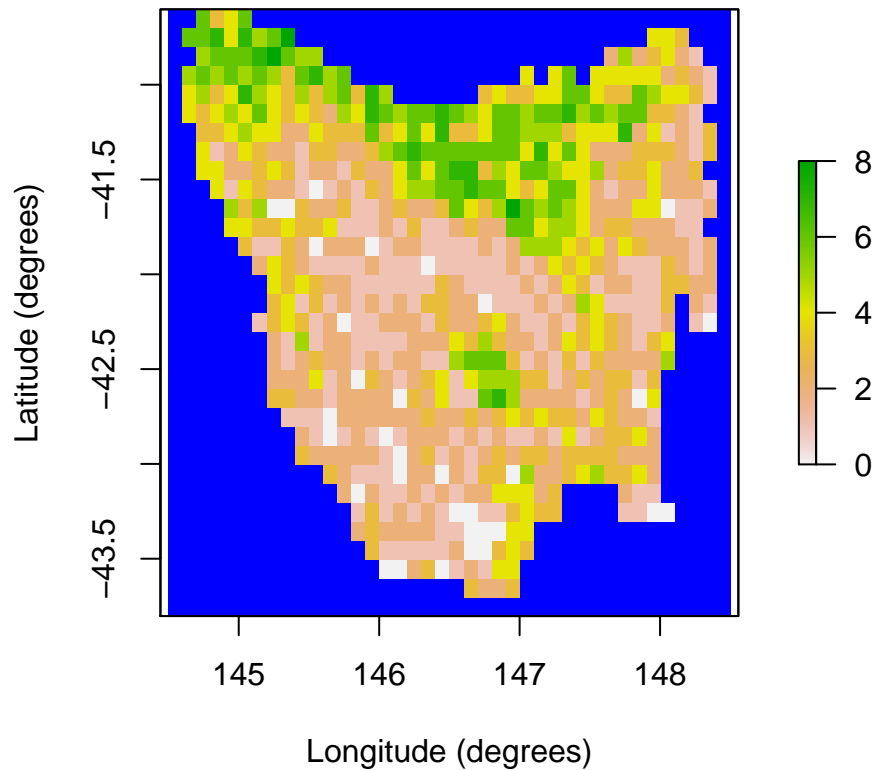

```
# Plot the example final carrying capacity
example_final_raster <- region$region_raster
example_final_raster[region$region_indices] <- example_carrying_capacity[, 80]
raster::plot(example_final_raster, main = "Final thylacine carrying capacity",
  colNA = "blue", xlab = "Longitude (degrees)", ylab = "Latitude (degrees)",
  zlim = c(0, 8))
```

## Final thylacine carrying capacity

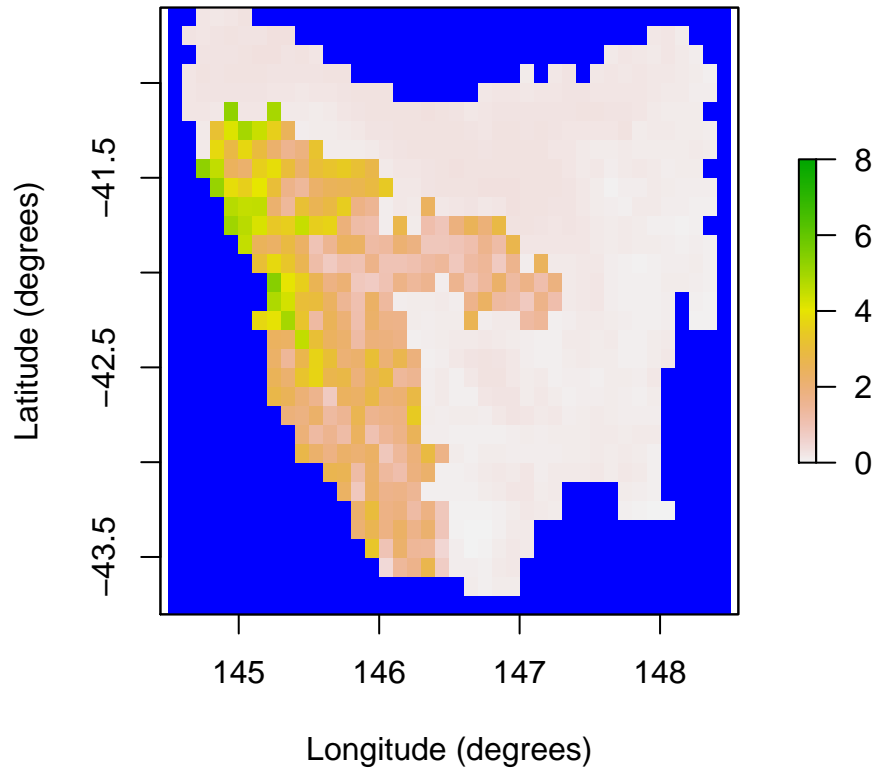

**Stage matrix generator** Our stage matrix generator adjusts our original stage matrix so that its equivalent (simple) growth rate ( $\lambda - 1$ ) is that of a sampled input rate.

```
# Build a stage matrix generator based on sampled growth rate
stage_matrix_gen <- Generator$new(
  description = "stage matrix",
  base_matrix = matrix(c(0.00, 0.57, 1.17,
                        0.50, 0.00, 0.00,
                        0.00, 0.80, 0.80), nrow = 3, ncol = 3, byrow = TRUE),
  inputs = c("growth_r"),
  outputs = c("stage_matrix"),
  generative_requirements = list(stage_matrix = "function"))
stage_matrix_gen$add_function_template(
  "stage_matrix",
  function_def = function (params) {
    return(params$base_matrix*(1 + params$growth_r)/
      Re(eigen(params$base_matrix)$values)[1]))
},
call_params = c("base_matrix", "growth_r"))
```

We can test our generator with an example (mid-value) sample input growth rate of 0.25 ( $\lambda = 1.25$ ).

```
# Generate sampled stage matrix for growth rate: lambda = 1.25
gen_stage_m <- stage_matrix_gen$generate(input_values = list(growth_r = 0.25))
```

```

gen_stage_m # examine
#> $stage_matrix
#>      [,1]      [,2]      [,3]
#> [1,] 0.0000000 0.5923549 1.2158863
#> [2,] 0.5196095 0.0000000 0.0000000
#> [3,] 0.0000000 0.8313752 0.8313752

```

**Dispersal generator** We already built our dispersal generator in step 1, so as to use it to calculate neighbourhood distances for density dependence. We will now use it to generate some example dispersal data.

```

# Generate sampled dispersals for p = 0.5, b = 7 (km)
sample_dispersal_data <- dispersal_gen$generate(
  input_values = list(dispersal_p = 0.5, dispersal_b = 7))$dispersal_data
head(sample_dispersal_data[[1]]) # examine
#>   target_pop source_pop emigrant_row immigrant_row dispersal_rate
#> 1           2           1             1             1         0.13164
#> 2           3           1             2             1         0.04198
#> 3           4           1             3             1         0.01161
#> 4           5           1             4             1         0.06444
#> 5           6           1             5             1         0.08576
#> 6           7           1             6             1         0.06444

```

## Example model run

Before proceeding to step 3 to setup multiple model simulations, let's run our model with its fixed parameter values, those initially set in our user-defined density dependence and harvest functions, along with our generated example initial abundance, carrying capacity, stage matrix, and dispersal data. We will do this by cloning our model template and setting our example parameters before running the population simulator.


```

# Run the model with example parameters
model <- model_template$clone()
model$set_attributes(initial_abundance = example_initial_abundance,
  carrying_capacity = example_carrying_capacity,
  stage_matrix = gen_stage_m$stage_matrix,
  dispersal = sample_dispersal_data)
results <- population_simulator(model) # run poems simulator

# Plot the total abundance and number harvested
plot(x = 1888:1967, y = results$all$abundance, xlab = "Year",
  ylab = "Number of thylacines", main = "Thylacine example model run",
  ylim = c(0, 2500), type = "l", col = "green", lwd = 2)
lines(x = 1888:1967, y = results$all$harvested, lty = 1, col = "blue", lwd = 2)
legend("topright", legend = c("Population size", "Simulated harvest"),
  col = c("green", "blue"), lty = c(1, 1), lwd = 2, cex = 0.8)

```

## Thylacine example model run

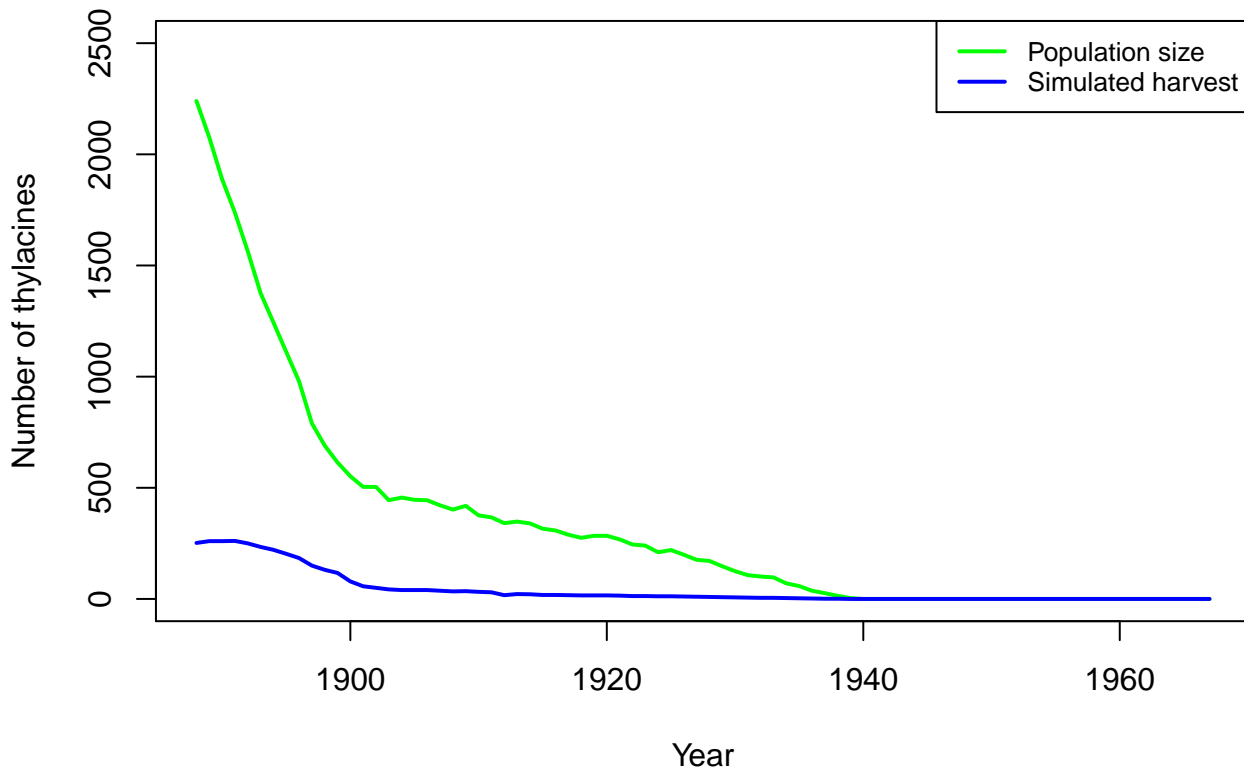

### Step 3: Sample model and generator parameters for each simulation

In order to explore the model parameter space to find the best models, we will now generate 20,000 Latin hypercube samples of model and generator parameters using the *LatinHypercubeSampler* class. We'll sample each parameter from uniform distributions across parameter ranges derived from Bulte et al. (2003), and via model trial runs.

```
# Create a LHS object
lhs_gen <- LatinHypercubeSampler$new()

# Set capacity and growth parameters (as per Bulte et al., 2003)
lhs_gen$set_uniform_parameter("k_init", lower = 2100, upper = 3500, decimals = 0)
lhs_gen$set_uniform_parameter("k_decline", lower = 0.03, upper = 0.05, decimals = 3)
lhs_gen$set_uniform_parameter("k_phi", lower = 0.6, upper = 1.0, decimals = 2)
lhs_gen$set_uniform_parameter("growth_r", lower = 0.1875, upper = 0.3125, decimals = 2)

# Set density dependence allee effect parameter
lhs_gen$set_uniform_parameter("density_allee", lower = 0, upper = 50, decimals = 1)

# Set bio-economic harvest parameters (as per Bulte et al., 2003)
lhs_gen$set_uniform_parameter("harvest_ohr", lower = 0, upper = 0.1, decimals = 3)
lhs_gen$set_uniform_parameter("harvest_fb", lower = 0.5, upper = 1.0, decimals = 2)
lhs_gen$set_uniform_parameter("harvest_w", lower = 2.625, upper = 4.375, decimals = 1)
lhs_gen$set_uniform_parameter("harvest_E0", lower = 18.75, upper = 31.25, decimals = 0)
lhs_gen$set_uniform_parameter("harvest_q", lower = 0, upper = 0.005, decimals = 4)
lhs_gen$set_uniform_parameter("harvest_v1", lower = 0.015, upper = 0.025, decimals = 3)
```

```

lhs_gen$set_uniform_parameter("harvest_v2", lower = 0.375, upper = 0.625, decimals = 3)

# Set new spatial parameters for dispersal
lhs_gen$set_uniform_parameter("dispersal_p", lower = 0.3, upper = 0.7, decimals = 2)
lhs_gen$set_uniform_parameter("dispersal_b", lower = 4, upper = 10, decimals = 1)

# Generate samples
sample_data <- lhs_gen$generate_samples(number = SAMPLES, random_seed = 123)
head(sample_data) # examine
#>   k_init k_decline k_phi growth_r density_allee harvest_ohr harvest_fb
#> 1   3451    0.050 0.67    0.27         46.1     0.016     0.64
#> 2   3208    0.048 0.80    0.28         1.0     0.052     0.50
#> 3   2375    0.033 0.96    0.29        30.9     0.072     0.76
#> 4   2733    0.042 0.87    0.25        23.5     0.057     0.63
#> 5   3048    0.040 0.64    0.19        46.4     0.074     0.74
#> 6   3250    0.031 0.76    0.21        38.5     0.081     0.99
#>   harvest_w harvest_E0 harvest_q harvest_v1 harvest_v2 dispersal_p dispersal_b
#> 1     3.3         30    0.0025     0.020     0.555     0.59     5.5
#> 2     2.9         23    0.0009     0.017     0.534     0.33     5.1
#> 3     3.8         29    0.0023     0.019     0.406     0.68     8.1
#> 4     4.0         26    0.0008     0.017     0.510     0.54     4.8
#> 5     3.1         21    0.0049     0.019     0.444     0.54     5.0
#> 6     2.9         24    0.0021     0.016     0.463     0.57     6.7
dim(sample_data) # dimensions
#> [1] 20000    14

```

#### Step 4: Build a simulation manager to run each simulation

We will now setup a *SimulationManager* class to manage the simulation of each set (or row) of sampled parameters. In demonstration mode we will only run the simulations for the first two samples. The *poems* package provides example simulation summary data for all 20,000 samples (which is used in our model ensemble selection and validation).

```

# Build the simulation manager
sim_manager <- SimulationManager$new(
  sample_data = sample_data,
  model_template = model_template,
  generators = list(capacity_gen, stage_matrix_gen, dispersal_gen),
  parallel_cores = PARALLEL_CORES,
  results_dir = OUTPUT_DIR)

# Run the simulations
if (DEMONSTRATION) {
  sim_manager$sample_data <- sample_data[1:2,]
}
run_output <- sim_manager$run()
run_output$summary
#> [1] "2 of 2 sample models ran and saved results successfully"
if (DEMONSTRATION) {
  dir(OUTPUT_DIR, "*.RData") # includes 2 result files
}
#> [1] "sample_1_results.RData" "sample_2_results.RData"
dir(OUTPUT_DIR, "*.txt") # plus simulation log
#> [1] "simulation_log.txt"

```

Note that the output directory contains a R-data result files for each sample simulation and a simulation log file.

### Step 5: Build a results manager to generate summary results (metrics)

We will now collate summary result metrics for each of our simulations using the *ResultsManager* class. Here we will generate three metrics: 1. Regression slopes of total bounty submitted over three intervals. 1. Estimated IBRA bioregion extirpation dates. 1. Estimated Tasmania-wide extinction date. The metrics (and any desired summary matrices) are calculated via user-defined functions operating on, or direct attributes of, *PopulationResults* class objects.

**Using the *PopulationResults* class** To setup and test our summary metric functions, we can load the results from our example simulation run into a *PopulationResults* class object. A time-series of IBRA bioregion bounty values are attached to our results via our harvest function. This can be used to calculate the regression slopes for specified intervals. To obtain a time-series of bioregion abundance values, we can include the bioregion cell indices in our result class object (as an attachment). We can then use this to calculate a time-series of abundance for each bioregion, and thus calculate extirpation times for each bioregion. We will use *PopulationResults* functionality for calculating population (cell) abundance slopes (trends) and extirpations via result object cloning. Our clones will instead be initialized with the bounty or bioregion abundance values. The Tasmania-wide extinction time is directly available from the results object.

```
# Load our results (list) into a PopulationResults object
p_results <- PopulationResults$new(results = results,
                                   ibra_indices = ibra_indices)

# Summary metrics for IBRA bioregions and Tasmania-wide extinction
ibra_bounty <- p_results$get_attribute("bounty") # saved in harvest function
ibra_bounty_clone <- p_results$new_clone(results = list(abundance = ibra_bounty),
                                          trend_interval = (1888:1894) - 1887)
ibra_bounty_clone$all$abundance_trend # 1888-1894 total bounty slope
#> [1] -3.833333
ibra_abundance <- t(array(unlist(lapply(p_results$get_attribute("ibra_indices"),
                                       function (indices) {
                                         colSums(p_results$abundance[indices,])
                                       })), c(80, 9)))
ibra_abundance_clone <- p_results$new_clone(results = list(abundance = ibra_abundance))
(1888:1967)[ibra_abundance_clone$extirpation] # IBRA extirpation
#> [1] 1937 1935 1939 1929 1940 1940 1938 1938 1939
(1888:1967)[p_results$all$extirpation] # total extinction
#> [1] 1940
```

**Generating summary metrics and matrices** Once we're happy with how to derive our summary metrics (and matrices) via the *PopulationResults* class, we can setup our results manager to generate the metrics and matrix (rows) for each sample simulation results (file). Note that passing the simulation manager when initializing the results manager copies the previous setup (sample data, output directory, etc.).

Our bounty regression slope and IBRA bioregion extirpation metrics may be combined into single metrics by calculating the square root of the mean square error (RMSE) of the simulated metrics from known or derived target values for each interval or bioregion. Thus our targets for each of these RMSE metrics (in step 6) will be zero. We can calculate these combined (RMSE) metrics using our results manager by including (or attaching) the target values to our results object. However, if we wish to retain flexibility in how we combine our individual metrics, or how we deal with *NA* values (e.g. no extirpation) in step 6, we can alternatively store our metrics for each slope interval or bioregion in generated matrix rows and combine the values later. Here we will demonstrate both approaches, although the matrix approach requires more disk space.



In demonstration mode, we will again only generate metrics for the first two samples. We will load pre-generated example summaries for all 20,000 sample simulations, provided with the *poems* package prior to our validation and ensemble selection (in step 6).

```
# Set targets for our summary metrics (used to calculate combined metric errors)
slope_intervals <- c("1888-1894", "1895-1901", "1902-1909")
targets <- list(
  bounty_slope = array(c(2.36, 3.25, -17.71), dimnames = list(slope_intervals)),
  ibra_extirpation = array(c(1907, 1929, 1919, 1922, 1935, 1937, 1937, 1932, 1937),
    dimnames = list(ibra_data$abbr)),
  total_extinction = c(1931, 1937) # CI
)

# Create a results manager for summary metrics and matrices
results_manager <- ResultsManager$new(
  simulation_manager = sim_manager,
  simulation_results = PopulationResults$new(ibra_indices = ibra_indices, # attachments
    targets = targets,
    extirp_NA_replace = 1968),
  result_attachment_functions = list( # attached for multiple use
    bounty_slope = function(results) { # via results object cloning
      bounty_slope <- array(NA, 3)
      ibra_bounty <- results$get_attribute("bounty") # saved in harvest function
      ibra_bounty_clone <- results$new_clone(results = list(abundance = ibra_bounty),
        trend_interval = (1888:1894) - 1887)
      bounty_slope[1] <- ibra_bounty_clone$all$abundance_trend
      ibra_bounty_clone <- results$new_clone(results = list(abundance = ibra_bounty),
        trend_interval = (1895:1901) - 1887)
      bounty_slope[2] <- ibra_bounty_clone$all$abundance_trend
      ibra_bounty_clone <- results$new_clone(results = list(abundance = ibra_bounty),
        trend_interval = (1902:1909) - 1887)
      bounty_slope[3] <- ibra_bounty_clone$all$abundance_trend
      bounty_slope
    },
    ibra_extirpation = function(results) { # via results object cloning
      ibra_abundance_clone <- results$new_clone(results = list(
        abundance = t(array(unlist(lapply(results$get_attribute("ibra_indices"),
          function(indices) {
            colSums(results$abundance[indices,])
          })), c(80, 9))))
      (1888:1967)[ibra_abundance_clone$extirpation]
    },
    summary_metrics = c("bounty_slope_error", "ibra_extirpation_error",
      "total_extinction"),
    summary_matrices = c("extirpation", "total_bounty", "ibra_bounty",
      "bounty_slope", "ibra_extirpation"),
    summary_functions = list(
      # Summary metrics
      bounty_slope_error = function(results) { # RMSE
        sqrt(mean((results$get_attribute("targets")$bounty_slope -
          results$get_attribute("bounty_slope"))^2))
      },
      ibra_extirpation_error = function(results) { # RMSE with NAs replaced
        ibra_extirpation <- results$get_attribute("ibra_extirpation")
        ibra_extirpation[is.na(ibra_extirpation)] <-
          results$get_attribute("extirp_NA_replace")
      }
    )
  )
)
```

```

    sqrt(mean((results$get_attribute("targets")$ibra_extirpation -
              ibra_extirpation)^2))
  },
  total_extinction = function(results) {
    (1888:1967)[results$all$extirpation]
  },
  # Summary matrices
  extirpation = function(results) { # for later use
    (1888:1967)[results$extirpation]
  },
  total_bounty = function(results) { # for later use
    colSums(results$get_attribute("bounty"))
  },
  ibra_bounty = function(results) { # for later use
    rowSums(results$get_attribute("bounty"))
  },
  bounty_slope = function(results) { # calculate RMSE later
    results$get_attribute("bounty_slope")
  },
  ibra_extirpation = function(results) { # calculate RMSE later
    results$get_attribute("ibra_extirpation")
  },
  parallel_cores = PARALLEL_CORES)

# Generate the summary metrics and matrices
gen_output <- results_manager$generate()
gen_output$summary
#> [1] "2 of 2 summary metrics/matrices generated from sample results successfully"
dir(OUTPUT_DIR, "*.txt") # plus generation log
#> [1] "generation_log.txt" "simulation_log.txt"
summary_metric_data <- results_manager$summary_metric_data
summary_matrix_list <- results_manager$summary_matrix_list
head(summary_metric_data) # examine
#>   index bounty_slope_error ibra_extirpation_error total_extinction
#> 1     1           10.976259             33.89362             NA
#> 2     2           9.653511             33.65346             NA
lapply(summary_matrix_list, dim) # dimensions
#> $extirpation
#> [1] 2 795
#>
#> $total_bounty
#> [1] 2 80
#>
#> $ibra_bounty
#> [1] 2 9
#>
#> $bounty_slope
#> [1] 2 3
#>
#> $ibra_extirpation
#> [1] 2 9
head(summary_matrix_list$bounty_slope) # examine
#>      [,1]      [,2]      [,3]
#> [1,] 0.500000 -8.333333 -2.75
#> [2,] -1.333333 -2.500000 -2.45
head(summary_matrix_list$ibra_extirpation) # examine

```

```
#>      [,1] [,2] [,3] [,4] [,5] [,6] [,7] [,8] [,9]
#> [1,] 1948 1950  NA 1952  NA 1964 1966  NA  NA
#> [2,] 1951 1947 1955 1959  NA  NA  NA  NA  NA
```

Note that the summary matrix list collates the specified result for each simulation on a single row of each matrix. Thus the columns in the extirpation matrix represent the extirpation time for each population cell, the columns in the total bounty and IBRA bounty matrices represent the total bounty at each of the 80 simulation time steps, and for each IBRA bioregion respectively. Similarly, the columns in the bounty slope matrix represent regression slopes for each of the three time intervals, and the IBRA extirpation matrix has a column for each of our nine bioregions.

**Summary metric refinement** We can now collate and refine the summary metrics that we wish to utilize in our validation and ensemble model selection (in step 6). Although we have already calculated RMSE metrics for our bounty regression slopes and IBRA extirpation dates, we could refine these by utilizing their uncombined values in the corresponding matrices. Here we will reproduce these metrics for our two samples for demonstration purposes (in demonstration mode), before loading the full pre-generated example metrics summary set. We will also calculate the error from the confidence interval (CI) for our simulated total extinction dates for our full metrics set.

```
# Demonstrate calculating RMSE metrics from matrices
if (DEMONSTRATION) { # Calculate RMSE for bounty slopes
  bounty_slope_error2 <- sqrt(rowMeans((summary_matrix_list$bounty_slope -
                                         matrix(targets$bounty_slope, nrow = 2,
                                                ncol = 3, byrow = TRUE))^2))

  cbind(bounty_slope_error = summary_metric_data$bounty_slope_error,
        bounty_slope_error2) # examine
}
#>      bounty_slope_error bounty_slope_error2
#> [1,]          10.976259          10.976259
#> [2,]           9.653511           9.653511
if (DEMONSTRATION) { # Calculate RMSE for IBRA extirpation
  ibra_extirpation <- summary_matrix_list$ibra_extirpation
  ibra_extirpation[is.na(ibra_extirpation)] <- 1968
  ibra_extirpation_error2 <- sqrt(rowMeans((ibra_extirpation -
                                              matrix(targets$ibra_extirpation, nrow = 2,
                                                    ncol = 9, byrow = TRUE))^2))

  cbind(ibra_extirpation_error = summary_metric_data$ibra_extirpation_error,
        ibra_extirpation_error2) # examine
}
#>      ibra_extirpation_error ibra_extirpation_error2
#> [1,]          33.89362          33.89362
#> [2,]          33.65346          33.65346

# Load full example metrics
if (DEMONSTRATION) {
  summary_metric_data <- poems::thylacine_example_metrics
  dim(summary_metric_data) # dimensions
}
#> [1] 20000      4

# Calculate the error from the CI of total extinction
extinct <- summary_metric_data$total_extinction
target_CI <- targets$total_extinction
summary_metric_data$total_extinction_error <-
  ((extinct < target_CI[1])*(extinct - target_CI[1]) +
   (extinct > target_CI[2])*(extinct - target_CI[2]))
```

```

head(summary_metric_data) # examine
#>   index bounty_slope_error ibra_extirpation_error total_extinction
#> 1     1         11.66632          26.61453          1961
#> 2     2         10.00490          37.24096           NA
#> 3     3         17.04603          10.87300          1925
#> 4     4         10.35301          28.90598           NA
#> 5     5         20.13609          30.41199          1902
#> 6     6         21.62111          22.15350          1913
#>   total_extinction_error
#> 1                24
#> 2                NA
#> 3                -6
#> 4                NA
#> 5               -29
#> 6               -18

```

Here we could have also replaced *NA* values when calculating the error of the total extinction date (from the target CI), however we will defer this so as to demonstrate *NA* replacement functionality in the validator in the next step.

## Step 6: Build a validator to select a model ensemble

We will now validate and select our model ensemble via the *Validator* class, which by default utilizes an approximate Bayesian computation (ABC) approach (Beaumont, Zhang, & Balding, 2002) provided by the *abc* library (Csillery et al., 2015). We will use the default configuration to select the best 200 models (via a *tolerance* of 0.01). Our targets for selecting the best models will be zero for our RMSE metrics (bounty slope and IBRA extirpation) and error metric for total extinction (CI). Note that for models where our simulated *thylacine* persist until the end of the simulation (1967), the extinction (CI error) value will be *NA*. Since the *abc* function requires finite values only, we will use the *non\_finite\_replacements* attribute of the validator to replace these *NA* values with the CI error corresponding to 1968.

Note that the validator generates diagnostics (as per the *abc* documentation) as a PDF file in the configured output directory. We may wish to configure this directory, as locating the default output directory generated via *tempdir()* can be tedious.

```

# Create a validator for selecting the 'best' example models
validator <- Validator$new(
  simulation_parameters = sample_data,
  simulation_summary_metrics = summary_metric_data[c("bounty_slope_error",
                                                    "ibra_extirpation_error",
                                                    "total_extinction_error")],
  observed_metric_targets = c(bounty_slope_error = 0,
                              ibra_extirpation_error = 0,
                              total_extinction_error = 0),
  non_finite_replacements = list(total_extinction_error = function(x) {
    (1968 - targets$total_extinction[2])}),
  output_dir = OUTPUT_DIR)
suppressWarnings(validator$run(tolerance = 0.01,
                              output_diagnostics = TRUE))

#> 12345678910
#> 12345678910
dir(OUTPUT_DIR, "*.pdf") # plus validation diagnostics (see abc library documentation)
#> [1] "validation_diagnostics.pdf"
head(validator$selected_simulations) # examine
#>   index      weight
#> 1    93 0.03166762
#> 2    99 0.10102911

```

```
#> 3 164 0.15546719
#> 4 309 0.42438497
#> 5 337 0.04689690
#> 6 377 0.11856365
dim validator$selected_simulations # dimensions
#> [1] 200 2
selected_indices <- validator$selected_simulations$index
selected_weights <- validator$selected_simulations$weight
```

Note that each selected model (via its index in the sample data frame) have a corresponding weight value, which is indicative of the congruence between each model's summary metrics and the corresponding target patterns.

## Selected model ensemble

Now that we have selected our model ensemble we can now examine:

- how well our summary metric targets were matched;
- which model parameters were most influential in our ensemble selection; and
- the impact of model stochasticity on our ensemble selection.

We can also verify our model via historic bounty record data not explicitly utilized in our validation and model selection.

Lastly, we can use our model ensemble to examine the spatiotemporal extirpation pattern of our simulated *thylacine* decline.

**Model ensemble summary metrics** To examine how well our individual (uncombined) metric targets have been matched, let's now plot the distributions of our summary metrics of our selected model ensemble, as well as those of the full 20,000 model simulations.

When in demonstration mode, we will load pre-generated example matrices, provided with the *poems* package, containing bounty slope and IBRA bioregion extirpations for all 20,000 sample simulations. The example matrices also include cell extirpation dates, and a time-series and IBRA distribution of total bounty, which we will use later.


```
# Load pre-generated example matrices
if (DEMONSTRATION) {
  summary_matrix_list <- poems::thylacine_example_matrices
} else { # cell extirpation and total/ibra bounty for selected samples only
  summary_matrix_list$extirpation <- summary_matrix_list$extirpation[selected_indices,]
  summary_matrix_list$total_bounty <- summary_matrix_list$total_bounty[selected_indices,]
  summary_matrix_list$ibra_bounty <- summary_matrix_list$ibra_bounty[selected_indices,]
}
lapply(summary_matrix_list, dim) # dimensions
#> $extirpation
#> [1] 200 795
#>
#> $total_bounty
#> [1] 200 80
#>
#> $ibra_bounty
#> [1] 200 9
#>
#> $bounty_slope
#> [1] 20000 3
#>
```

```

#> $ibra_extirpation
#> [1] 20000      9

# Plot the simulation, targets, and selected metrics for bounty slopes
bounty_slope <- summary_matrix_list$bounty_slope
colnames(bounty_slope) <- slope_intervals
graphics::boxplot(bounty_slope, border = rep("gray", 3), outline = FALSE, range = 0,
                  col = NULL, ylim = c(-35, 20), main = "Thylacine bounty slope",
                  xlab = "Slope interval (years)", ylab = "Bounty regression slope")
graphics::boxplot(cbind(bounty_slope[selected_indices,], NA), # NA for relative width
                  border = rep("blue", 3), width = c(rep(0.5, 3), 1), outline = FALSE,
                  range = 0, add = TRUE, col = NULL)
graphics::points(x = 1:3, y = targets$bounty_slope, col = "red", pch = 15)
legend("topright", c("All", "Target", "Selected"), fill = c("gray", "red", "blue"),
      border = NA, cex = 0.8)

```

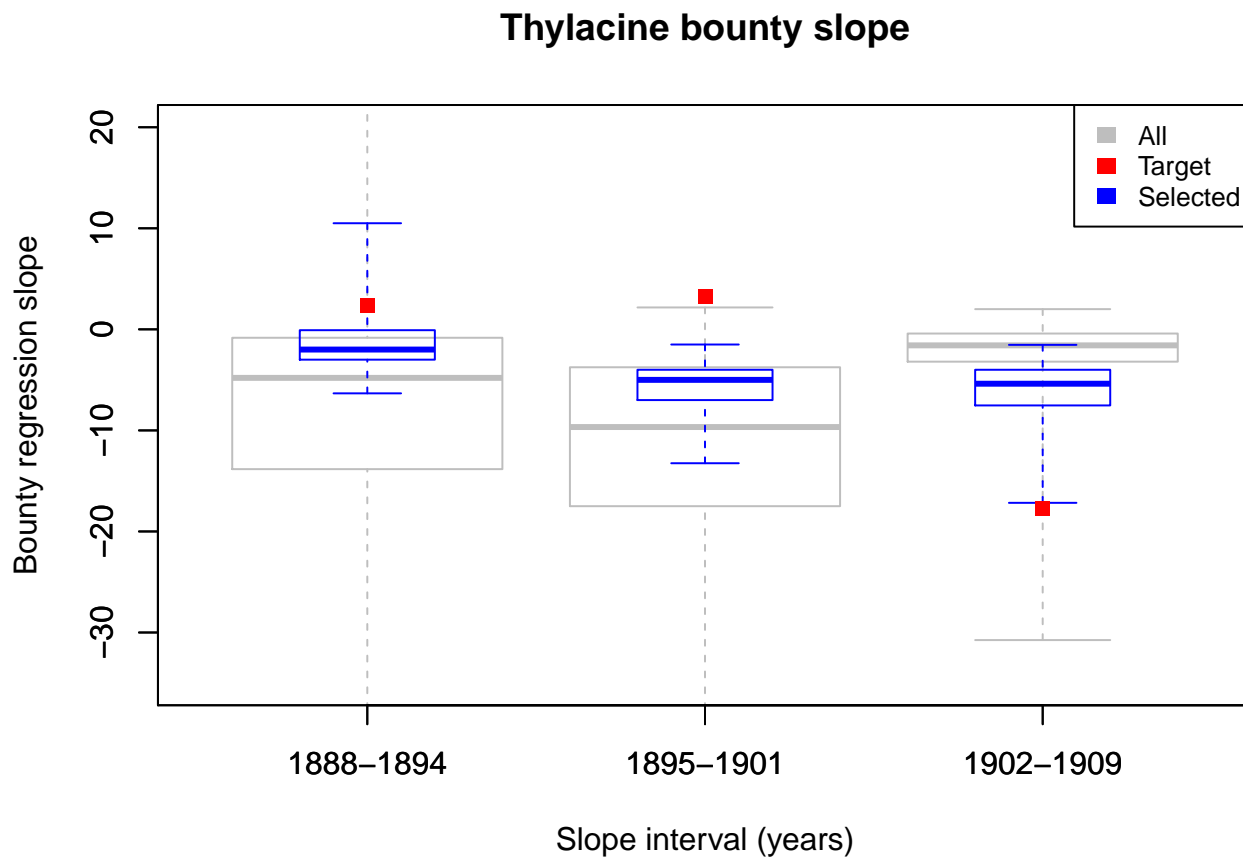


From this plot we can observe that, although the summary metrics of all 20,000 sample models generally do not align well with our bounty slope targets, our bounty slope metrics have been selected toward their corresponding targets. Generally, the distribution our full sample set does not facilitate model congruence with the targets, suggesting that our harvest function may be inadequate for generating the expected temporal contour of the total *thylacine* bounty.

```

# Plot the simulation, targets, and selected metrics for extirpation
extirpation <- cbind(summary_matrix_list$ibra_extirpation,
                     summary_metric_data$total_extinction)
colnames(extirpation) <- c(as.character(ibra_data$abbr), "Total")
graphics::boxplot(extirpation[, 10:1], border = rep("gray", 3), horizontal = TRUE,
                  outline = FALSE, range = 0, col = NULL, ylim = c(1888,1968),
                  main = "Thylacine model IBRA extirpation and total extinction",
                  xlim = c(0.5, 11), xlab = "Extirpation/extinction time (year)",
                  ylab = "IBRA bioregion/Tasmania-wide total")
graphics::boxplot(cbind(extirpation[selected_indices, 10:1], NA), horizontal = TRUE,
                  ylim = c(1888,1968), border = rep("blue", 10),
                  width = c(rep(0.5, 10), 1), outline = FALSE, range = 0,
                  add = TRUE, col = NULL)
graphics::points(x = targets$ibra_extirpation, y = 10:2, col = "red", pch = 15)
graphics::points(x = targets$total_extinction, y = c(1, 1), col = "red", pch = 15)
graphics::lines(x = targets$total_extinction, y = c(1, 1), col = "red", lwd = 2)
legend("topright", c("All", "Target (CI)", "Selected"), fill = c("gray", "red", "blue"),
      border = NA, cex = 0.8)

```

## Thylacine model IBRA extirpation and total extinction

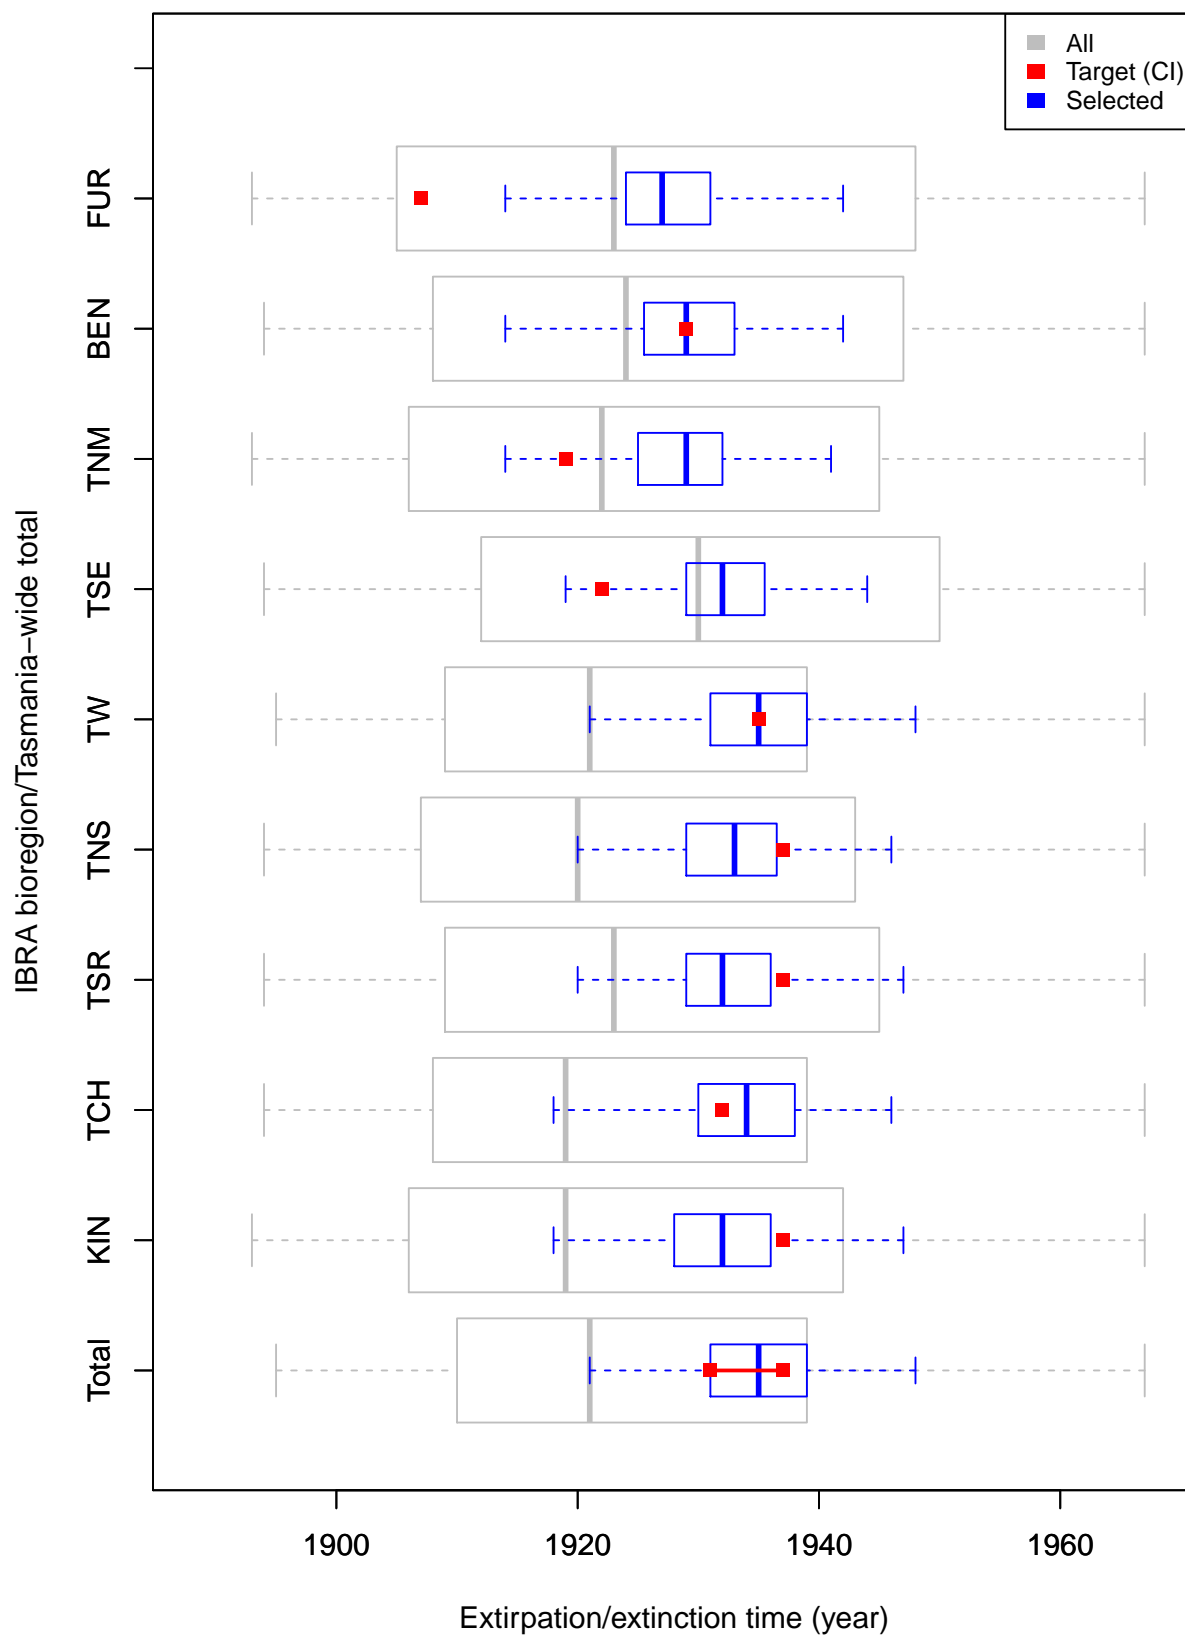




Here we see that, although our total Tasmania-wide extirpation date matches well, the simulated extirpation dates for individual IBRA bioregions vary in their congruence with the target values. We may wish assess the degree to which our sampled model harvest parameters can influence the spatial dynamics of the *thylacine* decline.


**Model ensemble parameters** We can now examine the features of our selected model ensemble to analyse its properties and adequacy. We can plot the distribution of our 200 selected model parameters in comparison to the (uniform) distribution of the full 20,000 simulated models. Here we will examine two notable example parameters: density Allee effect and harvest catchability.

```
# Allee effect
hist(sample_data$density_allee, breaks = 30, main = "Model ensemble Allee effect",
      xlab = "Allee effect", ylim = c(0, 1000), col = "gray", yaxt = "n")
hist(rep(sample_data$density_allee[selected_indices], 20), breaks = 20, col = "blue", add = TRUE)
legend("topright", c("All", "Selected"), fill = c("gray", "blue"), cex = 0.8)
```

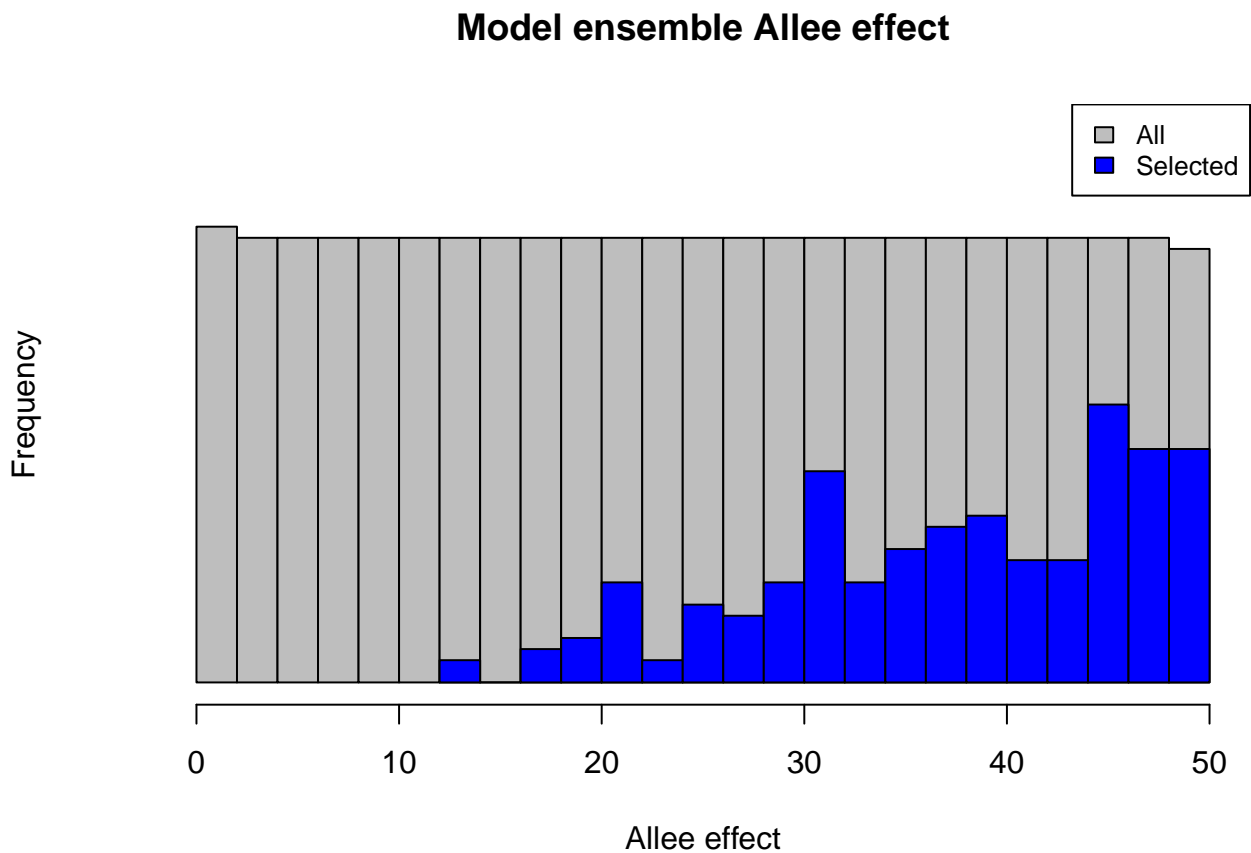

```
# Harvest catchability
hist(sample_data$harvest_q, breaks = 30, main = "Model ensemble harvest catchability",
      xlab = "Harvest catchability (q)", col = "gray") #, yaxt = "n")
hist(rep(sample_data$harvest_q[selected_indices], 20), breaks = 20, col = "blue", add = TRUE)
legend("topright", c("All", "Selected"), fill = c("gray", "blue"), cex = 0.8)
```

## Model ensemble harvest catchability

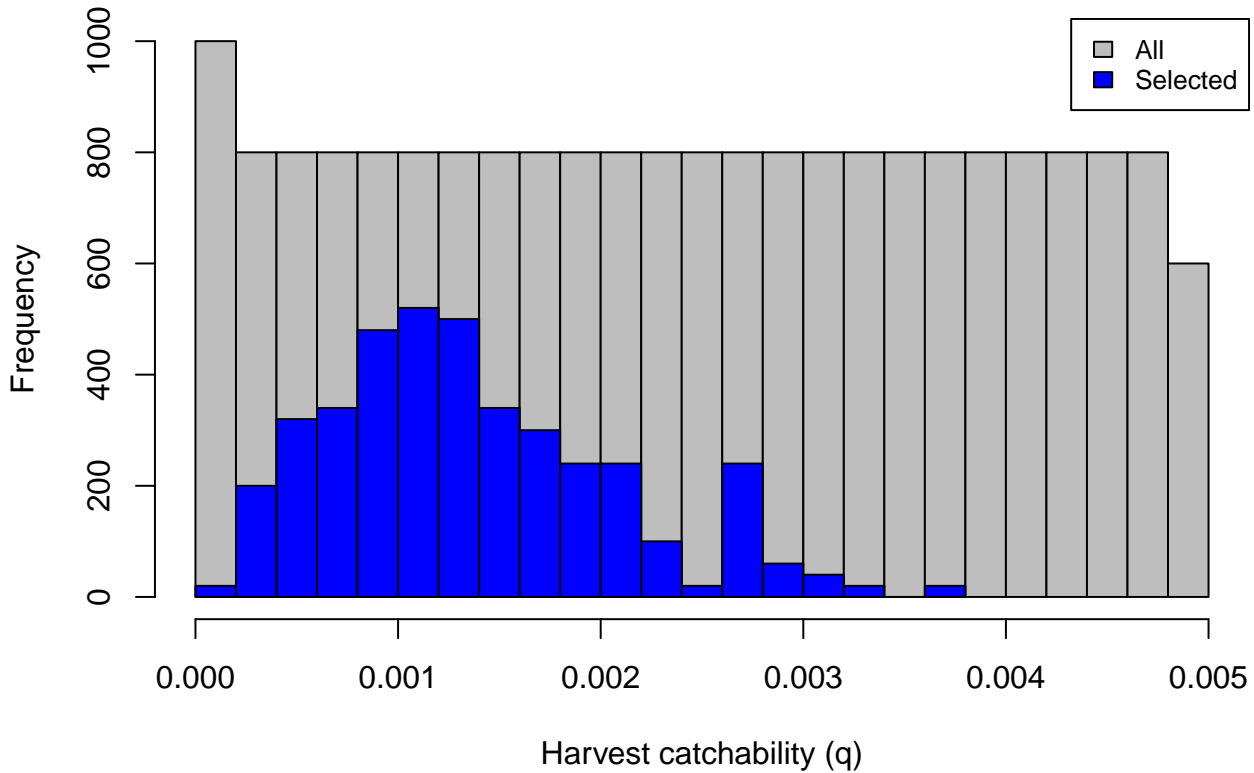


From the first plot we could note the general reliance our model has on the Allee effect in matching extirpation/extinction targets (or non-persistence in general). The second plot illustrates how the validation/selection process has “tuned” our harvest catchability parameter.

We could also explore relationships between selected model parameters, thus identifying which parameter combinations contributed to our selected model ensemble’s congruence with our metric targets. Here we examine one notable correlation between our selected model opportunistic harvest rate and our catchability parameter.

```
plot(x = sample_data$harvest_ohr, y = sample_data$harvest_q, ylim = c(0, 0.0055),
     xlab = "Opportunistic harvest rate", ylab = "Bio-economic harvest catchability",
     main = "Opportunistic harvest vs. catchability", col = "gray")
points(x = sample_data$harvest_ohr[selected_indices],
       y = sample_data$harvest_q[selected_indices], col = "blue", pch = 3)
graphics::legend("topright", legend = c("All samples", "Selected"),
                 col = c("gray", "blue"), pch = c(1, 3), cex = 0.8)
```

## Opportunistic harvest vs. catchability

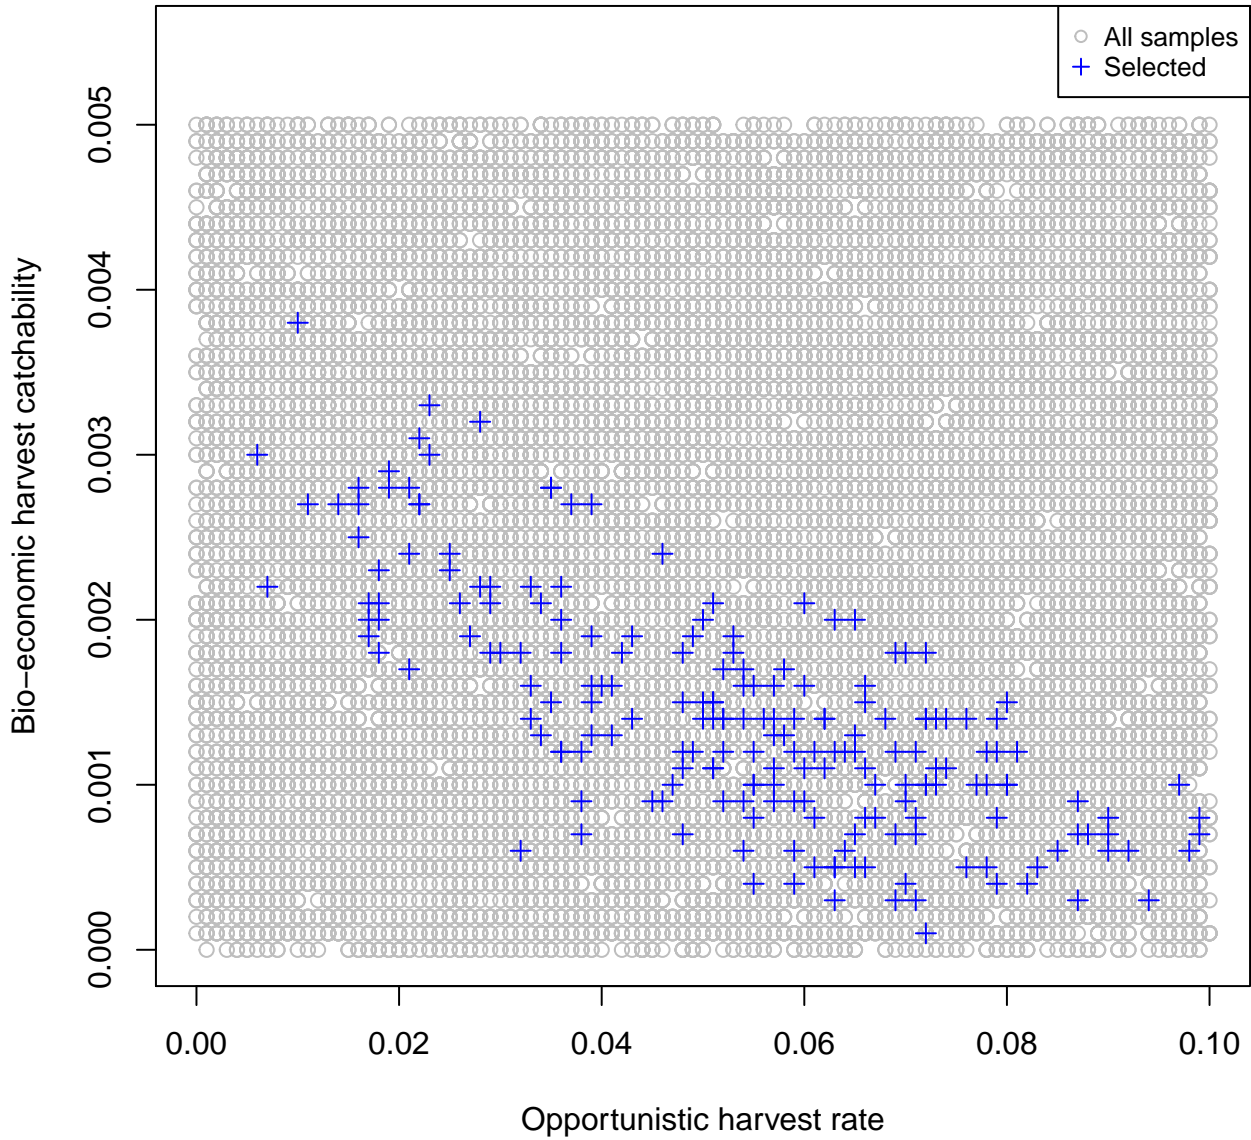

From the diagnostic output (PDF file in our output directory), we can also examine the posterior distributions of our 200 selected model parameters (in red) relative to those of all 20,000 simulations (in black), and their prior distributions (dashed line). This can give us further insight into the influence of each model parameter has had on our model selection.

From these diagnostics and plots we can analyse and assess the adequacy of our model and/or summary metrics. We may choose to refine our model parameter ranges or our summary metrics. We may also choose to simulate a more extensive parameter space, select fewer or more models via our validator's *tolerance* parameter, or revisit our model structure. We may also wish to examine the role (demographic) stochasticity has played in our model selection.

**Model ensemble stochasticity** We will now re-run each of our selected 200 models ten times, so as to examine the impact of demographic stochasticity on our summary metrics. Again, in demonstration mode, we will only run

the first two re-run simulations, then load example re-run summary metrics and matrices provided by the *poems* package.

Note that in order to not override existing results files we can either change our output directory, or alternatively, as we do here, change the naming of the output files via the *results\_filename\_attributes* attribute of the simulation and results managers.

```
# Run replicates of 10 for each selected model
sample_data_rerun <- cbind(sample = 1:nrow(sample_data), sample_data)
sample_data_rerun <- cbind(sample_data_rerun[rep(selected_indices, each = 10),],
                           rerun = rep(1:10, length(selected_indices)))
head(sample_data_rerun) # examine
#>      sample k_init k_decline k_phi growth_r density_allee harvest_ohr
#> 93      93   3153    0.042  0.73    0.29      43.2      0.072
#> 93.1    93   3153    0.042  0.73    0.29      43.2      0.072
#> 93.2    93   3153    0.042  0.73    0.29      43.2      0.072
#> 93.3    93   3153    0.042  0.73    0.29      43.2      0.072
#> 93.4    93   3153    0.042  0.73    0.29      43.2      0.072
#> 93.5    93   3153    0.042  0.73    0.29      43.2      0.072
#>      harvest_fb harvest_w harvest_E0 harvest_q harvest_v1 harvest_v2
#> 93      0.66      3.7      28    0.0014    0.016    0.414
#> 93.1    0.66      3.7      28    0.0014    0.016    0.414
#> 93.2    0.66      3.7      28    0.0014    0.016    0.414
#> 93.3    0.66      3.7      28    0.0014    0.016    0.414
#> 93.4    0.66      3.7      28    0.0014    0.016    0.414
#> 93.5    0.66      3.7      28    0.0014    0.016    0.414
#>      dispersal_p dispersal_b rerun
#> 93      0.39      8.4      1
#> 93.1    0.39      8.4      2
#> 93.2    0.39      8.4      3
#> 93.3    0.39      8.4      4
#> 93.4    0.39      8.4      5
#> 93.5    0.39      8.4      6
if (DEMONSTRATION) {
  sim_manager$sample_data <- sample_data_rerun[1:2,]
} else {
  sim_manager$sample_data <- sample_data_rerun
}
sim_manager$results_filename_attributes <- c("sample", "rerun")
run_output <- sim_manager$run()
run_output$summary
#> [1] "2 of 2 sample models ran and saved results successfully"
if (DEMONSTRATION) {
  dir(OUTPUT_DIR, "*.RData") # includes 2 new result files
}
#> [1] "sample_1_results.RData"      "sample_2_results.RData"
#> [3] "sample_93_rerun_1_results.RData" "sample_93_rerun_2_results.RData"

# Collate summary metrics for re-runs
if (DEMONSTRATION) {
  results_manager$sample_data <- sample_data_rerun[1:2,]
} else {
  results_manager$sample_data <- sample_data_rerun
}
results_manager$summary_matrices <- c("bounty_slope", "ibra_extirpation")
results_manager$results_filename_attributes <- c("sample", "rerun")
gen_output <- results_manager$generate()
```

```

gen_output$summary
#> [1] "2 of 2 summary metrics/matrices generated from sample results successfully"
if (DEMONSTRATION) {
  results_manager$summary_metric_data # examine demo
}
#>   index bounty_slope_error ibra_extirpation_error total_extinction
#> 1     1           10.48966           9.949874           1930
#> 2     2           12.00372           9.752493           1933
if (DEMONSTRATION) { # load full example metrics and (some) matrices
  summary_metric_data_rerun <- poems::thylacine_example_metrics_rerun
  summary_matrix_list_rerun <- poems::thylacine_example_matrices_rerun
} else {
  summary_metric_data_rerun <- results_manager$summary_metric_data
  summary_matrix_list_rerun <- results_manager$summary_matrix_list
}
head(summary_metric_data_rerun) # examine
#>   index bounty_slope_error ibra_extirpation_error total_extinction
#> 1     1           10.25934           9.345231           1933
#> 2     2           11.39545           7.498148           1933
#> 3     3           11.10617           8.969083           1937
#> 4     4           10.99519           9.165151           1936
#> 5     5           11.54769           8.006941           1931
#> 6     6           11.36416           8.950481           1936
dim(summary_metric_data_rerun) # dimensions
#> [1] 2000    4
lapply(summary_matrix_list_rerun, dim) # dimensions
#> $bounty_slope
#> [1] 2000    3
#>
#> $ibra_extirpation
#> [1] 2000    9

```

Note that the output directory contains new R-data result files for each sample rerun simulation, named via a unique combination of sample data frame attributes.


Now we can compare the distributions of our metrics for all, selected, and re-run models to better assess the impact of stochasticity. Note that simulations that persist are represented via an extirpation date of 1968.

```

# Bounty slope error
bounty_slope_error <- summary_metric_data$bounty_slope_error
hist(bounty_slope_error, breaks = 140, main = "Thylacine bounty slope error",
     xlim = c(0, 50), xlab = "Bounty slope RMSE", col = "gray", yaxt = "n")
bounty_slope_error_r <- summary_metric_data_rerun$bounty_slope_error
hist(rep(bounty_slope_error_r, 2), breaks = 20, col = "gold3", add = TRUE)
hist(rep(bounty_slope_error[selected_indices], 5), breaks = 12,
     col = "blue", add = TRUE)
lines(x = rep(0, 2), y = c(0, 10000), col = "red", lwd = 2)
legend("topright", c("All", "Target", "Selected", "Replicates"),
     fill = c("gray", "red", "blue", "gold3"), cex = 0.8)


```

## Thylacine bounty slope error

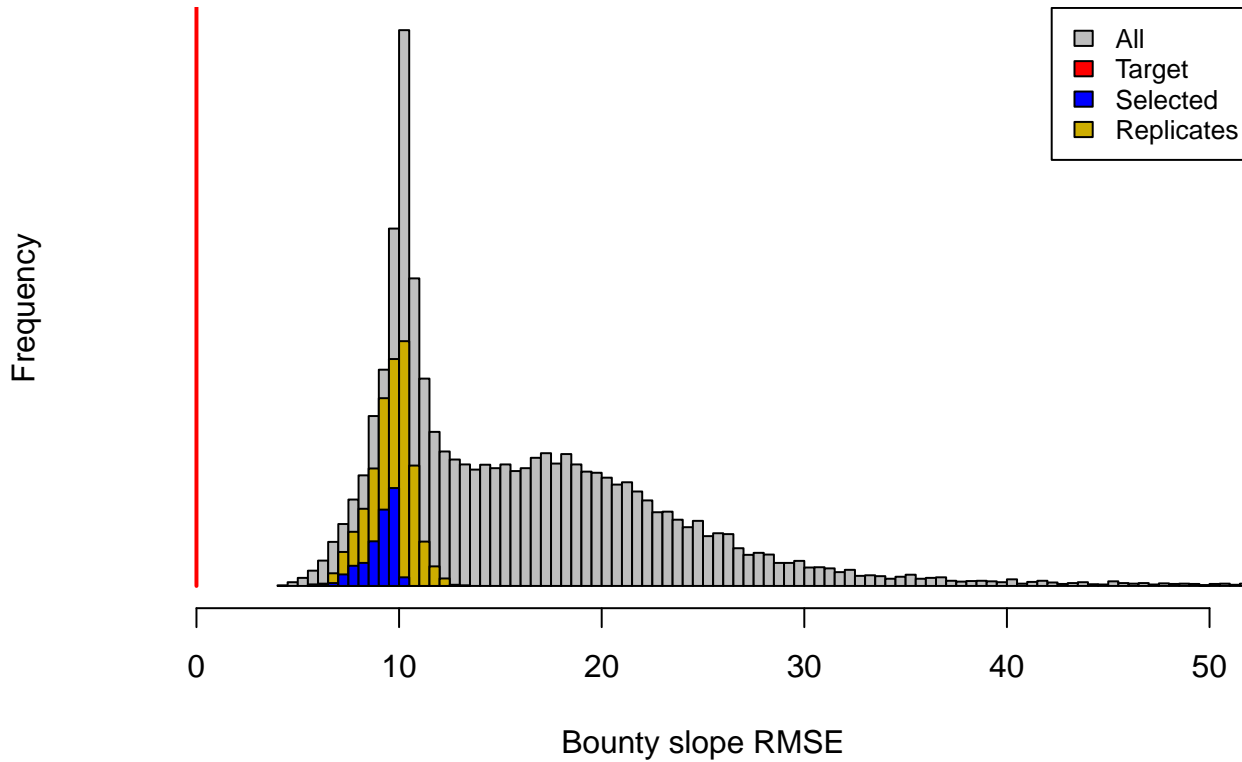


```
# IBRA extirpation error
ibra_extirpation_error <- summary_metric_data$ibra_extirpation_error
hist(bounty_slope_error, breaks = 140, main = "Thylacine IBRA extirpation error",
     xlim = c(0, 50), xlab = "IBRA extirpation RMSE", col = "grey", yaxt = "n")
ibra_extirpation_error_r <- summary_metric_data_rerun$ibra_extirpation_error
hist(rep(ibra_extirpation_error_r, 2), breaks = 40, col = "gold3", add = TRUE)
hist(rep(ibra_extirpation_error[selected_indices], 5), breaks = 20, col = "blue",
     add = TRUE)
lines(x = rep(0, 2), y = c(0, 10000), col = "red", lwd = 2)
legend("topright", c("All", "Target", "Selected", "Replicates"),
     fill = c("grey", "red", "blue", "gold3"), cex = 0.8)
```

## Thylacine IBRA extirpation error

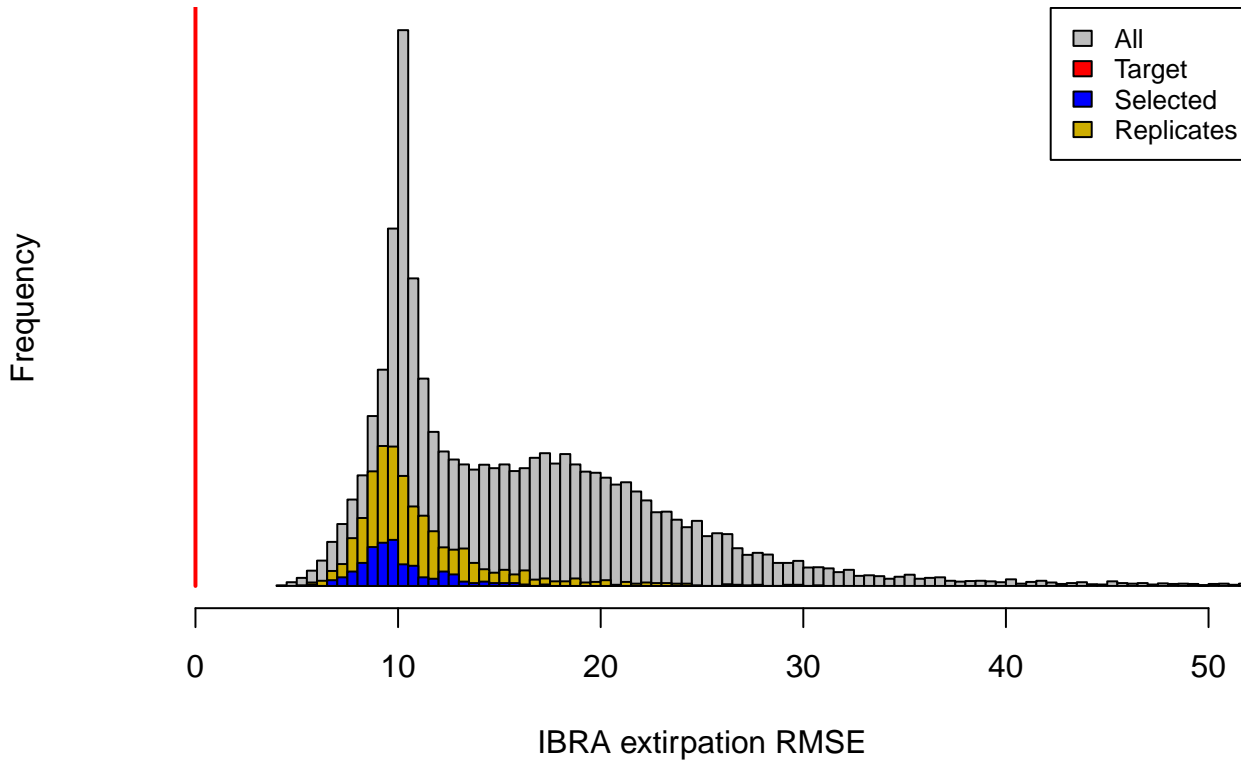

```
# Extinction time
extinction_time <- summary_metric_data$total_extinction
persistent_number <- length(which(is.na(extinction_time)))
extinction_time_finite <- extinction_time[!is.na(extinction_time)]
extinction_time_modified <-
hist(c(extinction_time_finite, rep(1968, round(persistent_number/10))), breaks = 81,
     main = "Thylacine extinction", xlim = c(1888, 1968),
     xlab = "Extinction time (year)", col = "gray40", yaxt = "n")
hist(extinction_time_finite, breaks = 81, col = "gray", add = TRUE)
extinction_time_rerun <- summary_metric_data_rerun$total_extinction
extinction_time_rerun[which(is.na(extinction_time_rerun))] <- 1968
hist(rep(extinction_time_rerun, 2), breaks = 50, col = "gold3", add = TRUE)
hist(rep(extinction_time[selected_indices], 5), breaks = 28, col = "blue", add = TRUE)
lines(x = rep(1931, 2), y = c(0, 10000), col = "red", lwd = 2)
lines(x = rep(1937, 2), y = c(0, 10000), col = "red", lwd = 2)
legend("topleft", c("All", "(persistent/10)", "Target (CI)", "Selected", "Replicates"),
     fill = c("gray", "gray40", "red", "blue", "gold3"), cex = 0.8)
```

## Thylacine extinction

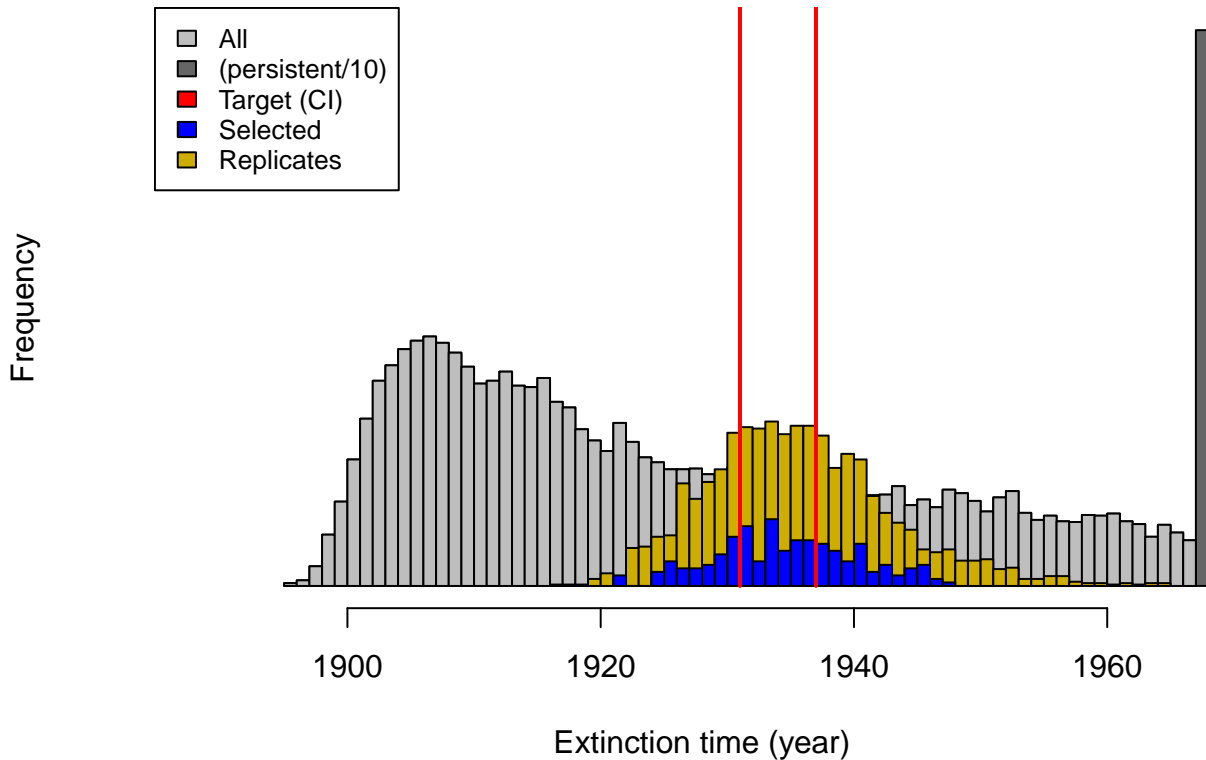

From these plots we can observe that stochastic processes operating in our model have an impact on our model validation and ensemble selection. Generally, the distributions of the metrics have widened in our model ensemble replicate re-runs. We could further analyze the effects of stochasticity by exploring approaches for identifying which of our selected models are congruent with our target metrics most frequently.


**Model ensemble verification** We can verify the adequacy of our model by examining how well it produces observed data patterns that were not (explicitly) utilized in the model validation and selection stages. While the slopes of the bounty were used for validating and selecting our model ensemble, the actual bounty magnitudes were not. Let's now use our model ensemble to compare our simulated bounty submitted, to the historical (time-series) records (provided with the *poems* package). Here we will use the selected model weights to calculate a weighted average of simulated bounty submitted for the selected ensemble and their replicates.

```
# Compare weighted ensemble model to actual historical bounty time-series
historic_bounty <- poems::thylacine_bounty_record
selected_bounty <- summary_matrix_list$total_bounty
weighted_bounty <- colSums(selected_bounty*selected_weights/sum(selected_weights))

# Plot the simulated and actual bounty
plot(x = 1888:1909, y = weighted_bounty[1:22], xlab = "Year",
     ylab = "Number of thylacines", main = "Thylacine bounty submitted",
     ylim = c(0, 200), type = "l", col = "blue", lwd = 2)
lines(x = 1888:1909, y = historic_bounty$Total, lty = 1, col = "red", lwd = 2)
legend("topright", legend = c("Model ensemble bounty", "Actual bounty"),
     col = c("blue", "red"), lty = c(1, 1), lwd = 2, cex = 0.8)
```



## Thylacine bounty submitted

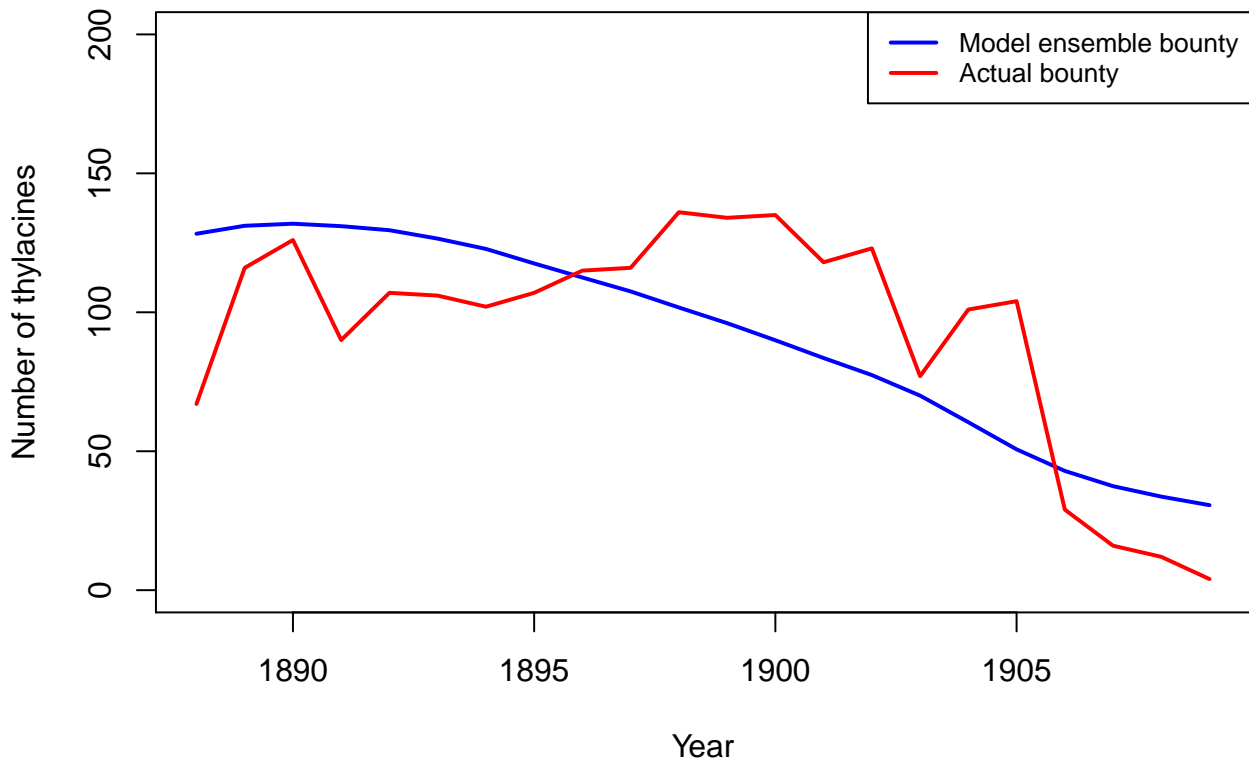


We can also compare our simulated total bounty submitted, both across IBRA bioregions and Tasmania-wide, to our historical bounty record.

```
# Compare weighted ensemble model to actual historical bioregion bounty values
selected_bounty <- cbind(summary_matrix_list$ibra_bounty,
                          rowSums(summary_matrix_list$ibra_bounty))
weighted_bounty <- colSums(selected_bounty*selected_weights/sum(selected_weights))
combined_bounty <- rbind(weighted_bounty,
                           actual_bounty <- colSums(historic_bounty[, c(3:11, 2)]))
combined_bounty[, 10] <- combined_bounty[, 10]/2

# Comparative plot of simulated and historic IBRA/total bounty
barplot(combined_bounty, xlab = "IBRA bioregion/Tasmania-wide total", beside = TRUE,
        ylab = "Number of thylacines", col = c("blue", "red"),
        main = "Thylacine bounty submitted by region", border = NA)
legend("topleft", c("Model ensemble bounty", "Actual bounty", "Note: Total/2"),
      fill = c("blue", "red", NA), border = NA, cex = 0.8)
```

## Thylacine bounty submitted by region

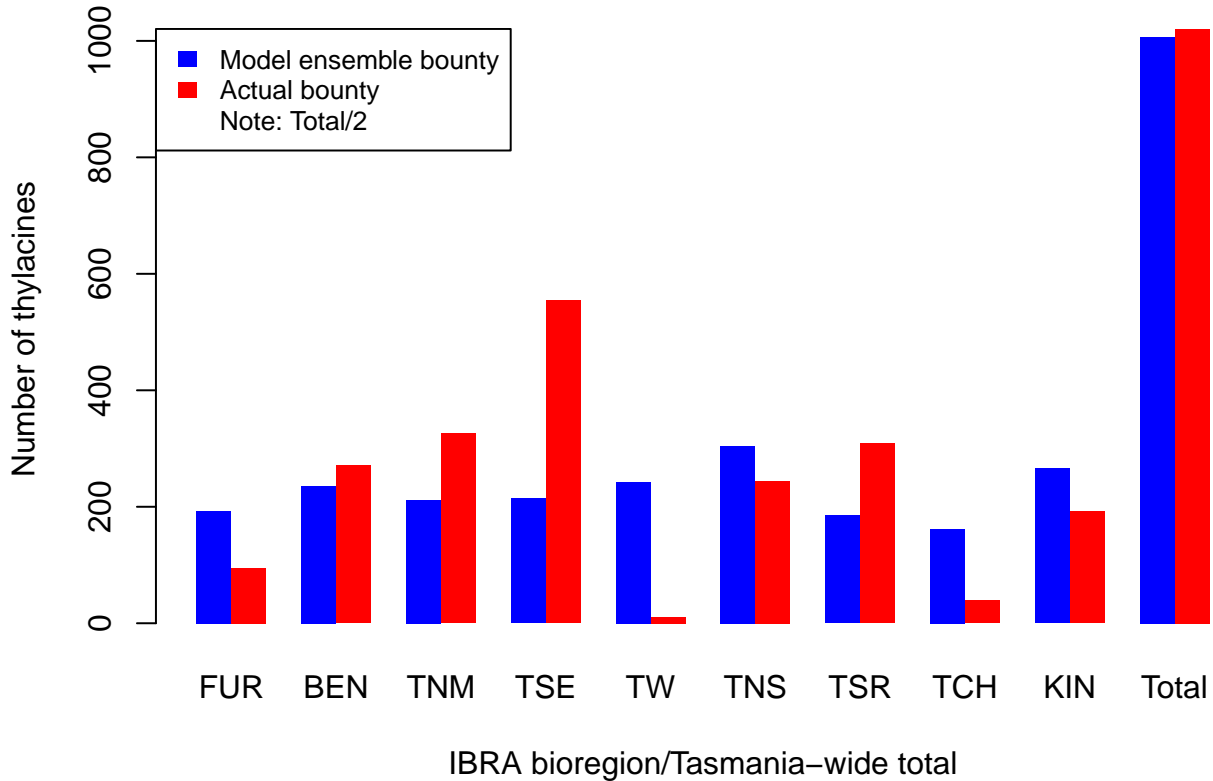


We could perform more thorough statistical analyses to verify our model ensemble. However, from our comparative plots of *thylacine* bounty submissions we have gained insight into how well our ensemble model matches the bounty record both temporally and spatially. We could thus devise ways in which to improve future versions of our model, including developing a harvest function with mechanisms and parameterization that better model spatiotemporal responses to the bounty reward. With an improved model we could gain insight into spatiotemporal dynamics of the *thylacine* decline.

**Model ensemble usage** Although our model ensemble could be improved to better match spatiotemporal patterns, as a final demonstration let's examine how we can use our ensemble to examine our simulated spatiotemporal extirpation pattern.

```
# Calculate the weighted cell extirpation dates
selected_extirp <- summary_matrix_list$extirpation
weighted_extirpation <- colSums(selected_extirp*selected_weights/sum(selected_weights))

# Plot the weighted cell extirpation dates
extirpation_raster <- region$raster_from_values(weighted_extirpation)
raster::plot(extirpation_raster, main = "Thylacine model ensemble extirpation",
  xlab = "Longitude (degrees)", ylab = "Latitude (degrees)",
  zlim = c(1888, 1940), col = grDevices::heat.colors(100), colNA = "blue")
```

## Thylacine model ensemble extirpation

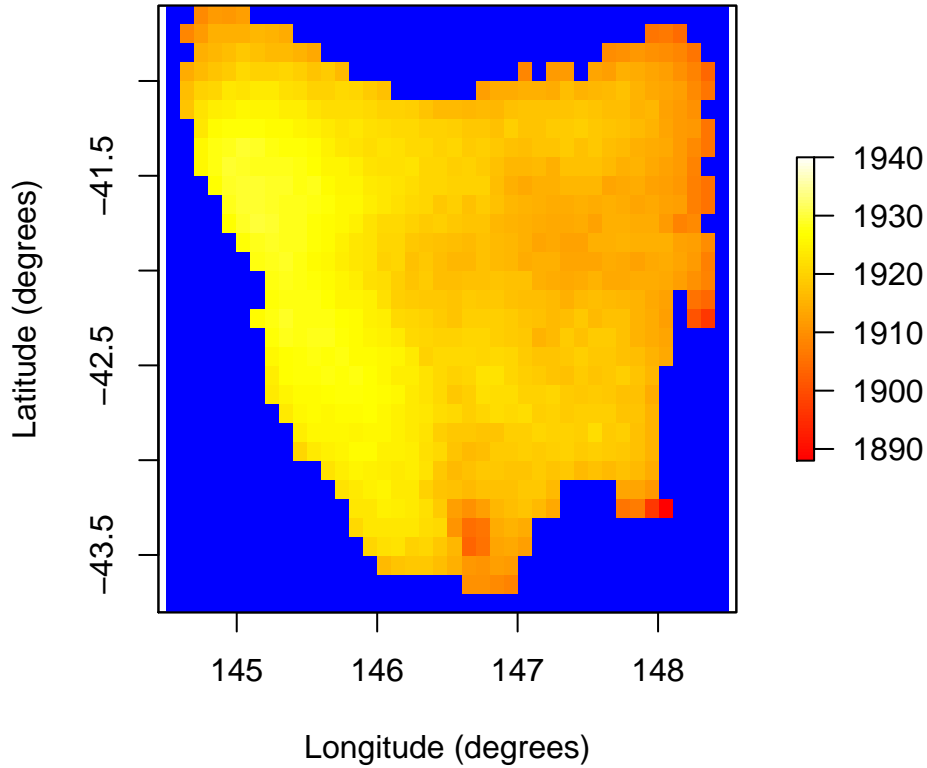

### Summary

Building and utilizing our model ensemble for the *thylacine* has provided a relatively advanced demonstration of the *poems* 6-step workflow and its modules.

1. First we delved into constructing a customized model with user-defined density dependence and harvest functions.
2. We then built generators for dynamically generating stage matrices, initial abundances, carrying capacities, and dispersal rates for our sampled models.
3. We generated sample model parameters via Latin hypercube sampling.
4. We ran these sampled models via a *poems* simulation manager.
5. We then collated and calculated summary metrics, based on functions we defined within a results manager.
6. After which, we fed our sample model parameters, our summary metrics, and target values for those metrics (derived from historical bounty and sighting records), into an ABC validator, and ran it to select our model ensemble.

We then examined how well our model ensemble matched our target metrics, and analysed the influence that our model parameters and stochasticity had on the ensemble selection. We also verified our model via the bounty records to see how well it matched patterns that was not explicitly used in the model validation and ensemble selection.

Generally, we found that the spatiotemporal patterns of the historic response to the bounty reward were not well-matched by our model ensemble simulations, although the congruence with expected patterns at the Tasmania-wide level was reasonable. However, the purpose of our, mostly qualitative visualization-based, analyses of our *thylacine*

model was to demonstrate *poems* features, rather than to produce a definitive model simulating the decline of the *thylacine*.

In performing these steps we explored much of the functionality offered by *poems*. We hope that this vignette has provided you with a feature-rich example to use as a guide for building your own customized models with *poems*, to explore the spatiotemporal dynamics of populations of interest in your research and practice.

Thank you :-)

## References

- Allee, W. C. (1931). *Animal Aggregations: A Study in General Sociology*. University of Chicago Press.
- Beaumont, M. A., Zhang, W., & Balding, D. J. (2002). ‘Approximate Bayesian computation in population genetics’. *Genetics*, vol. 162, no. 4, pp. 2025–2035.
- Bulte, E. H., Horan, R. D., & Shogren, J. F. (2003). ‘Is the Tasmanian tiger extinct? A biological–economic re-evaluation’, *Ecological Economics*, vol. 45, no. 2, pp. 271–279.
- Csillery, K., Lemaire L., Francois O., & Blum M. (2015). ‘abc: Tools for Approximate Bayesian Computation (ABC)’. *R package version 2.1*. Retrieved from <https://CRAN.R-project.org/package=abc>
- Grimm, V., Revilla, E., Berger, U., Jeltsch, F., Mooij, W. M., Railsback, S. F., Thulke, H. H., Weiner, J., Wiegand, T., DeAngelis, D. L., (2005). ‘Pattern-Oriented Modeling of Agent-Based Complex Systems: Lessons from Ecology’. *Science* vol. 310, no. 5750, pp. 987–991.
- Guiler, E. (1985). *Thylacine: The Tragedy of the Tasmanian Tiger*. Oxford University Press, Melbourne.
- Guiler E. R. & Godard P. (1998). *Tasmanian tiger: a lesson to be learnt*. Abrolhos Publishing, Perth, Western Australia.
- Ricker, W. E. (1954). ‘Stock and recruitment’. *Journal of the Fisheries Research Board of Canada*, vol. 11, no. 5, pp. 559–623.