

Ex 2 KERNEL CONFIGURATION AND COMPILATION

Date: 25.08.2020

Aim: To study and implement the kernel configuration and compilation.

Description:

The Linux Kernel:


The main purpose of a computer is to run a predefined sequence of instructions, known as a program. A program under execution is often referred to as a process. Now, most special purpose computers are meant to run a single process, but in a sophisticated system such a general-purpose computer, are intended to run many processes simultaneously. Any kind of process requires hardware resources such are Memory, Processor time, Storage space, etc.

In a General-Purpose Computer running many processes simultaneously, we need a middle layer to manage the distribution of the hardware resources of the computer efficiently and fairly among all the various processes running on the computer. This middle layer is referred to as the kernel. Basically, the kernel virtualizes the common hardware resources of the computer to provide each process with its own virtual resources. This makes the process seem as it is the sole process running on the machine. The kernel is also responsible for preventing and mitigating conflicts between different processes.

The Core Subsystems of the Linux Kernel are as follows:

1. The Process Scheduler
2. The Memory Management Unit (MMU)
3. The Virtual File System (VFS)
4. The Networking Unit
5. Inter-Process Communication Unit


This is schematically represented below:

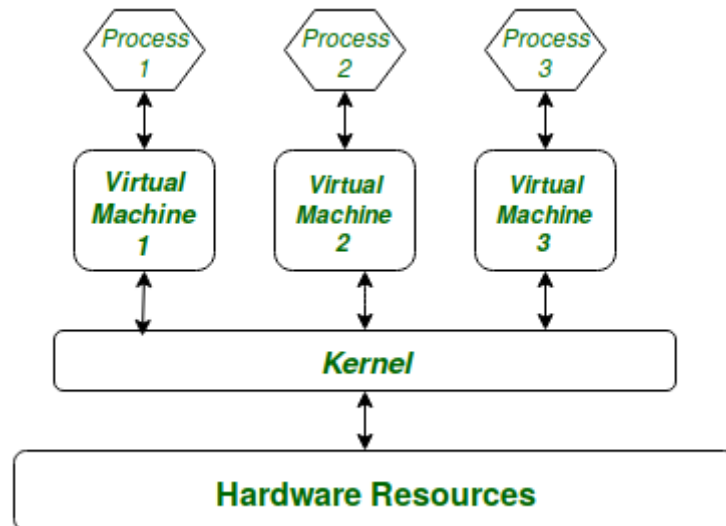

Architecture of system kernel:

We can think of Linux Kernel architecture to be divided into two levels

- User Space
- Kernel Space.

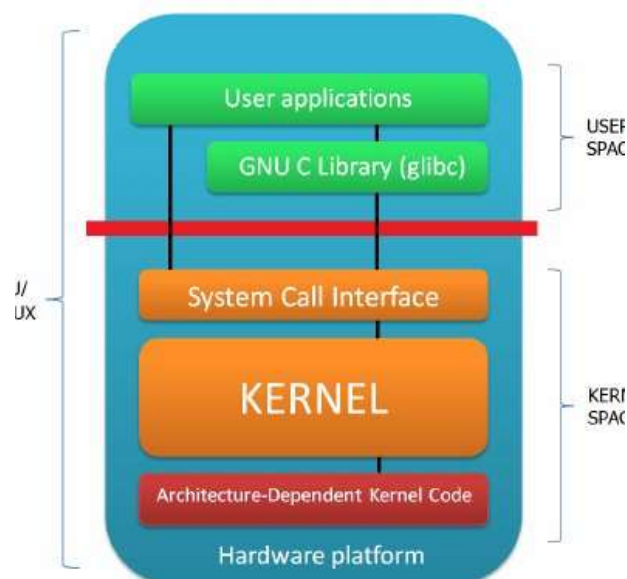

At the top is the user space. Below the user space is the kernel space. Here, the Linux kernel exists.

User Space: This is where the user applications are executed. There is also the GNU C Library (glibc). This provides the system call interface that connects to the kernel and provides the mechanism to transition between the user-space application and the kernel.

Commands:

| Sl. No. | Command Name | Description | options |
|---------|--------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. | rpm | It is an open packaging system, which runs on Red Hat Enterprise Linux as well as other Linux and UNIX systems | -a, --all Query all packages -f Query for packages owning given file |
| 2. | uname | uname displays the information about the system. | -a It prints all the system information in the order -s It prints the kernel name. -n It prints the hostname of the network node -r It prints the kernel release date |

| | | | |
|-----------|------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | -v It prints the version of the current kernel |
| 3. | tar | tar' stands for tape archive, is used to create Archive and extract the Archive files | -c Creates Archive -x Extract the archive -f Creates archive with given filename -t Displays or lists files in archive file -u Archives and adds to an existing archive file -A Concatenates the archive files -z zip, tells tar command that create tar file using gzip -W Verify a archive file -r update or add file or directory in already existed .tar file |
| 4. | ln | A symbolic link, also known as a symlink or soft link, is a | <ul style="list-style-type: none">• Hard links• Soft links |

| | | | |
|----|------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | special type of file that points to another file or directory. | |
| 5. | make | utility for building and maintaining groups of programs. | -b,-m prints online help and exit. -B Unconditionally make all targets -d Print debugging information in addition to normal processing -e Give variables taken from the environment precedence over variables from makefiles -k Continue as much as possible after an error |

Exercise:

Steps involved in the configuration process:

Step 1: Download the latest kernel source from www.kernel.org or from a repository.

Step 2: Check the current kernel version and name of the kernel.

Output:

Kernel Version

```
gloria@kali:/proc
File Actions Edit View Help
gloria@kali:/proc$ cat version
Linux version 5.7.0-kali1-amd64 (devel@kali.org) (gcc version 9.3.0 (Debian 9.3.0-14), GNU ld (GNU
for Debian) 2.34) #1 SMP Debian 5.7.6-1kali2 (2020-07-01)
gloria@kali:/proc$
```

Kernel Name

```
gloria@kali: ~
File Actions Edit View Help
gloria@kali:~$ uname -r
5.7.0-kali1-amd64
```

Results: The study and implement the kernel configuration and compilation is studied and executed.

Video Link: <https://youtu.be/Xf6b9pVqfHM>