



```
elbog@ELBOG:~$ sudo mkdir -p /var/www/esprit1.com/public_html
elbog@ELBOG:~$ sudo mkdir -p /var/www/esprit2.com/public_html
elbog@ELBOG:~$ ls /var/www
esprit1.com esprit2.com html
elbog@ELBOG:~$
```

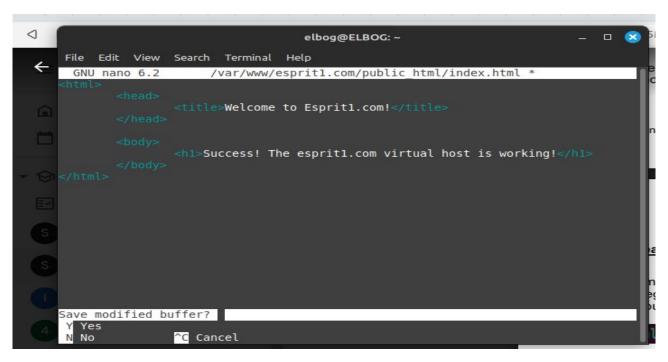


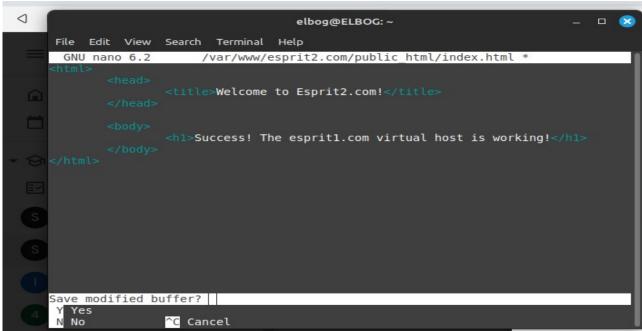

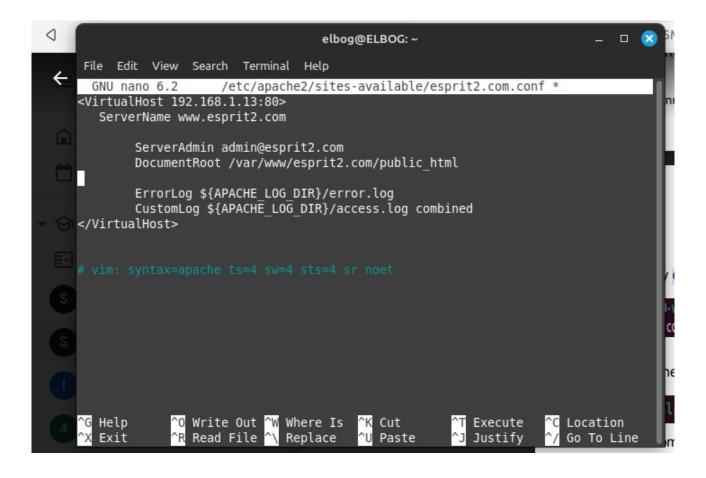

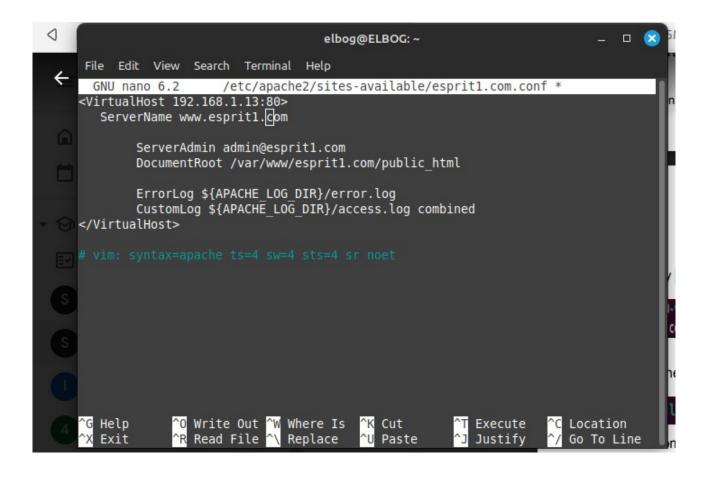

```
elbog@ELBOG:~$ sudo nano /etc/apache2/sites-available/esprit2.com.conf
elbog@ELBOG:~$ sudo a2ensite esprit1.com.conf
Enabling site esprit1.com.
To activate the new configuration, you need to run:
    systemctl reload apache2
elbog@ELBOG:~$ sudo a2ensite esprit2.com.conf
Enabling site esprit2.com.
To activate the new configuration, you need to run:
    systemctl reload apache2
elbog@ELBOG:~$ sudo a2dissite 000-default.conf
Site 000-default disabled.
To activate the new configuration, you need to run:
    systemctl reload apache2
elbog@ELBOG:~$ systemctl reload apache2
elbog@ELBOG:~$ systemctl reload apache2
elbog@ELBOG:~$
```

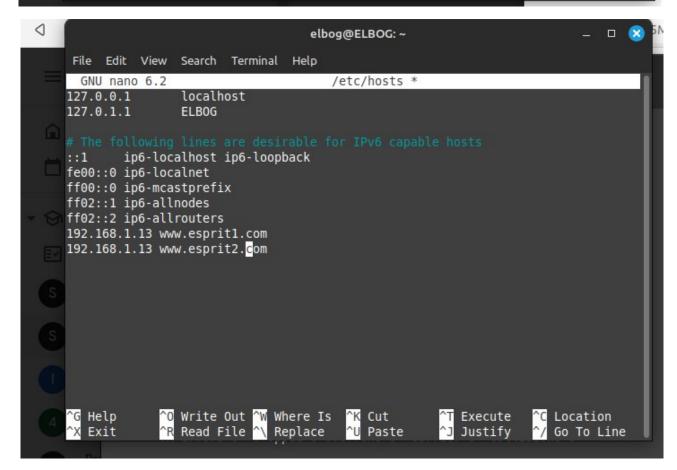



Success! The esprit1.com virtual host is working!



Success! The esprit2.com virtual host is working!

