Glympse Intents Reference



```
Glympse Intents Reference
Introduction
Reference
Sending
Overview
com.glympse.android.intent.CREATE
CALLBACK_ACTION
Viewing
com.glympse.android.intent.VIEW
Configuring
com.glympse.android.intent.SETTINGS
```


Introduction

Glympse application provides a way to send and view Glympses using Android intents.

Reference

Sending

Overview

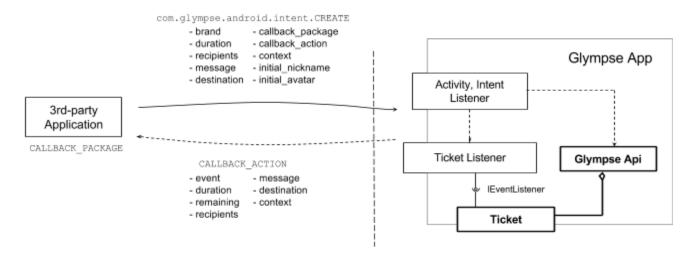

com.glympse.android.intent.CREATE

Action

com.glympse.android.intent.CREATE

Extras

Property	Description		Туре
duration	Ticket duration in milliseconds.	Ticket duration in milliseconds.	
recipients	<pre>The recipients to be added to the ticket. { "type": TYPE, "subtype": SUBTYPE, "name": NAME, "address": ADDRESS, "brand": BRAND }</pre>		Array of String (JSON)
	The following types are supported: app link sms email 		
message	Message to be set.		String
destination	<pre>Destination to be set. { "name": NAME, "latitude": LATITUDE, "longitude": LONGITUDE }</pre>		String (JSON)
flags	A combination of the following flags to cus a Glympse wizard: • FLAG_RECIPIENTS_EDITABLE • FLAG_RECIPIENTS_READ_ONLY • FLAG_MESSAGE_EDITABLE • FLAG_MESSAGE_EDITABLE • FLAG_MESSAGE_READ_ONLY • FLAG_MESSAGE_DELETE_ONLY • FLAG_MESSAGE_HIDDEN • FLAG_DESTINATION_EDITABLE • FLAG_DESTINATION_READ_ONLY • FLAG_DESTINATION_DELETE_ONLY • FLAG_DESTINATION_HIDDEN • FLAG_DURATION_EDITABLE • FLAG_DURATION_EDITABLE	tomize appearance of Send 0x0000000000000000000000000000000000	long
callback_package	Glympse application is using this property to send targeted intents. The value passed here is referred as <code>CALLBACK_PACKAGE</code> further in this document.		String
callback_action	Intent that Glympse application fires back when any activity happens o the ticket. The value passed here is referred as <code>CALLBACK_ACTION</code> further in this document.		
events	Specifies whether sender is interested in a	all ticket events (true) or just	bool
	I .		

	original sent confirmation (false).	
context	Optional meta data that is passed back to caller application along with all subsequent notifications regarding this ticket.	String
initial_nickname	Initial nickname to set for the user if it isn't already set.	String
Initial_avatar Initial_avatar to set for the user if it isn't already set. Local image URI has to be passed here.		String

CALLBACK_ACTION

CALLBACK_ACTION is sent exclusively to CALLBACK_PACKAGE (if it is specified).

Action

CALLBACK_ACTION

Extras

Property	Description	Туре
context	Optional meta data provided by 3rd party application along with com.glympse.android.intent.CREATE intent.	String
recipients	<pre>The recipients to be added to the ticket. { "type": TYPE, "subtype": SUBTYPE, "name": NAME, "address": ADDRESS, "url": URL } The following types are supported</pre>	Array of String (JSON)
	• email	
event	Possible values:	String
duration	Ticket duration in milliseconds.	long
remaining	Ticket remaining time in milliseconds.	long
message	Ticket message.	String
destination	Ticket destination.	String (JSON)

```
"name": NAME,
  "latitude": LATITUDE,
  "longitude": LONGITUDE
}
```

Viewing

com. glympse. and roid. in tent. VIEW

Action

```
com.glympse.android.intent.VIEW
```

Extras

Property	Description	Туре
codes	Array of entities to start following on the map to start watching. Each item on the array is a Glympse invite code or Glympse group name. Group names have to be prefixed by '!'.	Array of String

Configuring

com.glympse.android.intent.SETTINGS

Action

```
com.glympse.android.intent.SETTINGS
```

Extras

Property	Description	Туре
flags	Set of flags to customize the appearance of Settings wizard.	long