Manipulating Resources and Validating Input

Kevin Dockx
Architect

www.kevindockx.tech

Passing Data to the API

Data can be passed to an API by various means

Binding source attributes tell the model binding engine where to find the binding source

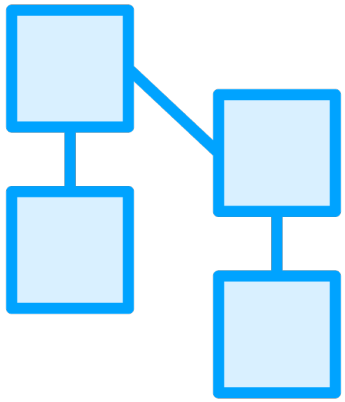

`[FromBody]`

- Request body

`[FromForm]`

- Form data in the request body

`[FromHeader]`

- Request header

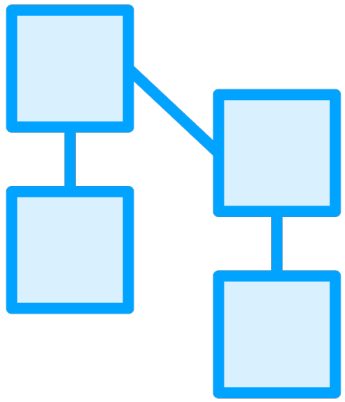

`[FromQuery]`

- Query string parameters

`[FromRoute]`

- Route data from the current request

`[FromServices]`

- The service(s) injected as action parameter

`[AsParameters]`

- Method parameters

```
public ActionResult<CityDto> GetCity(
    [FromRoute] int cityId)
```

Passing Data to the API

Use binding source attributes to explicitly state where the action parameter should be bound from

Passing Data to the API

By default, ASP.NET Core attempts to use the complex object model binder

The `[ApiController]` attribute changes the rules to better fit APIs

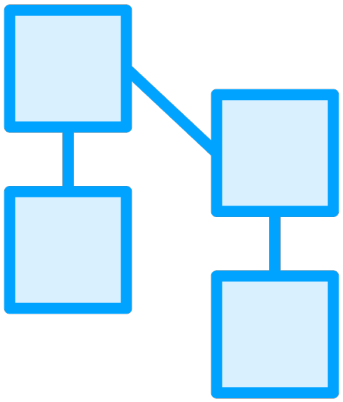

`[FromBody]`

- Inferred for complex types

`[FromForm]`

- Inferred for action parameters of type `IFormFile` and `IFormFileCollection`

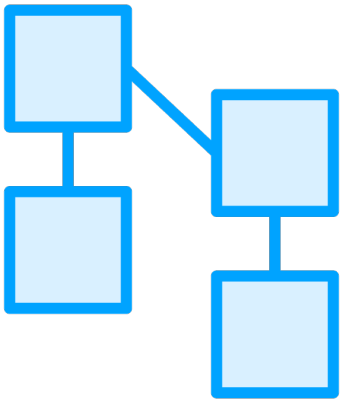

`[FromRoute]`

- Inferred for any action parameter name matching a parameter in the route template

`[FromQuery]`

- Inferred for any other action parameters