Experiment – 15

Creation of a VM Snapshot and Restoration of a Previous Version Using VMware Workstation


Aim

To create a snapshot of a virtual machine using VMware Workstation and test it by restoring the previous state or loading a cloned virtual machine.

Procedure

1. Open VMware Workstation on the Windows host operating system.
2. Select the Ubuntu virtual machine and power it on.
3. Wait for the guest operating system to start successfully.
4. Click VM → Snapshot → Take Snapshot to save the current state of the virtual machine.
5. Enter a snapshot name, such as Ubuntu_Before_Changes, and provide a description if required.
6. Click Take Snapshot to create the snapshot.
7. Make changes to the virtual machine, such as creating a new file or modifying an existing file.
8. Shut down the virtual machine and open VM → Snapshot → Snapshot Manager.
9. Select the previously created snapshot and click Go To to restore the saved state.
10. Confirm the operation if prompted and start the virtual machine again.
11. Verify that the virtual machine has returned to its previous state and that the changes made after the snapshot are no longer present.
12. If cloning is required, use the Clone option, if available, to create a separate copy of the virtual machine and verify that it starts successfully.

Output:

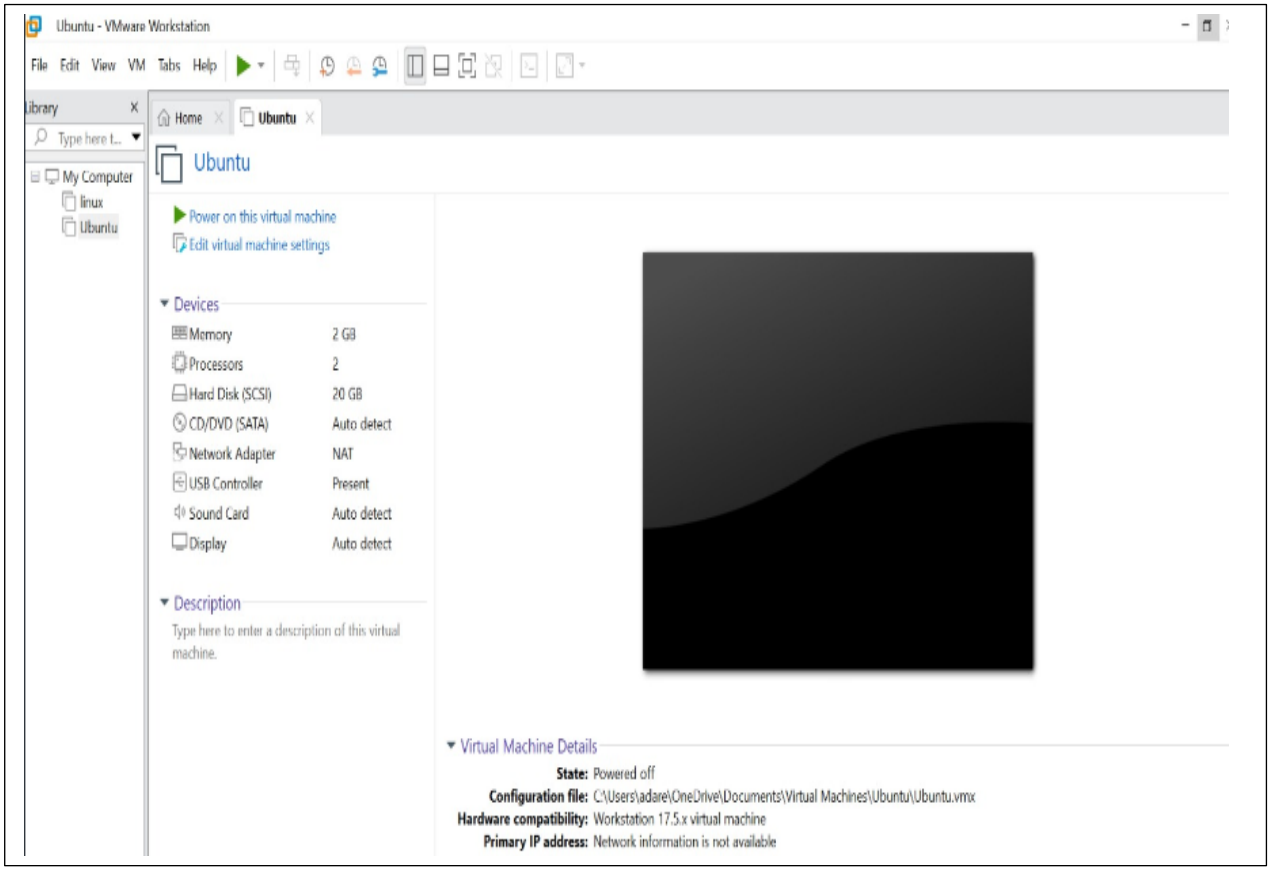

Result

Thus, a snapshot of the virtual machine was created using VMware Workstation, and the previous state was restored and tested successfully.