



# Introduction to Machine Learning

## Gaussian Process Classification



### Learning goals

● XXX

● XXX

# GAUSSIAN PROCESS CLASSIFICATION


- Consider a binary classification problem where we want to learn  $h : \mathcal{X} \rightarrow \mathcal{Y}$ , where  $\mathcal{Y} = \{0, 1\}$ .
- The idea behind Gaussian process classification is very simple: a GP prior is placed over the score function  $f(\mathbf{x})$  and then transformed to a class probability via a sigmoid function  $s(t)$

$$p(y = 1 \mid f(\mathbf{x})) = s(f(\mathbf{x})).$$


- This is a non-Gaussian likelihood, so we need to use approximate inference methods, e.g. Laplace approximation, expectation propagation, MCMC
- For more details see *Rasmussen, Gaussian Processes for Machine Learning, Chapter 3*.

# GAUSSIAN PROCESS CLASSIFICATION

Function drawn from a GP prior

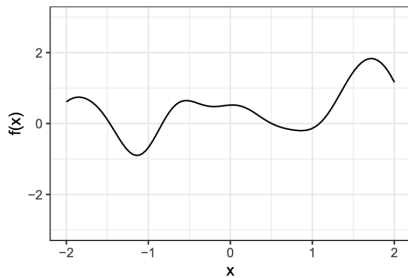

Function transformed into probs

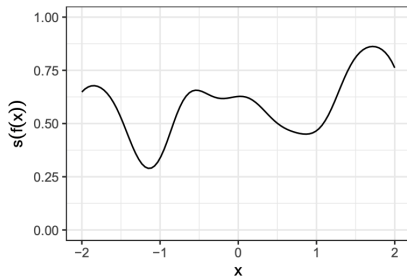

# GAUSSIAN PROCESS CLASSIFICATION

According to Bayes' rule, the posterior (of the score function  $\mathbf{f}$ )

$$p(\mathbf{f} \mid \mathbf{X}, \mathbf{y}) = \frac{p(\mathbf{y} \mid \mathbf{f}, \mathbf{X}) \cdot p(\mathbf{f} \mid \mathbf{X})}{p(\mathbf{y} \mid \mathbf{X})} \propto p(\mathbf{y} \mid \mathbf{f}) \cdot p(\mathbf{f} \mid \mathbf{X})$$

(the denominator is independent of  $\mathbf{f}$  and thus dropped).

Since  $p(\mathbf{f} \mid \mathbf{X}) \sim \mathcal{N}(0, \mathbf{K})$  by the GP assumption, we have

$$\log p(\mathbf{f} \mid \mathbf{X}, \mathbf{y}) \propto \log p(\mathbf{y} \mid \mathbf{f}) - \frac{1}{2} \mathbf{f}^\top \mathbf{K}^{-1} \mathbf{f} - \frac{1}{2} \log |\mathbf{K}| - \frac{n}{2} \log 2\pi.$$

# GAUSSIAN PROCESS CLASSIFICATION

If the kernel is fixed, the last two terms are fixed. To obtain the maximum a-posteriori estimate (MAP) we minimize

$$\frac{1}{2} \mathbf{f}^\top \mathbf{K}^{-1} \mathbf{f} - \sum_{i=1}^n \log p(y^{(i)} | f^{(i)}) + C.$$

Note that  $-\sum_{i=1}^n \log p(y^{(i)} | f^{(i)})$  is the logistic loss. We can see that Gaussian process classification corresponds to **kernel Bayesian logistic regression!**

# COMPARISON: GP VS. SVM

## The SVM

$$\frac{1}{2} \|\boldsymbol{\theta}\|^2 + C \sum_{i=1}^n L\left(y^{(i)}, f\left(\mathbf{x}^{(i)}\right)\right),$$

where  $L(y, f(\mathbf{x})) = \max\{0, 1 - f(\mathbf{x}) \cdot y\}$  is the Hinge loss.

By the representer theorem we know that  $\boldsymbol{\theta} = \sum_{i=1}^n \beta_i y^{(i)} k(\mathbf{x}^{(i)}, \cdot)$  and thus  $\boldsymbol{\theta}^\top \boldsymbol{\theta} = \boldsymbol{\beta}^\top \mathbf{K} \boldsymbol{\beta} = \mathbf{f}^\top \mathbf{K}^{-1} \mathbf{f}$ , as  $\mathbf{K} \boldsymbol{\beta} = \mathbf{f}$ . Plugging that in, the optimization objective is

$$\frac{1}{2} \mathbf{f}^\top \mathbf{K}^{-1} \mathbf{f} + C \sum_{i=1}^n L\left(y^{(i)}, f\left(\mathbf{x}^{(i)}\right)\right).$$

# COMPARISON: GP VS. SVM

For log-concave likelihoods  $\log p(\mathbf{y} \mid \mathbf{f})$ , there is a close correspondence between the MAP solution of the GP classifier

$$\arg \min_{\mathbf{f}} \frac{1}{2} \mathbf{f}^\top \mathbf{K}^{-1} \mathbf{f} - \sum_{i=1}^n \log p(y^{(i)} \mid f^{(i)}) + C \quad (\text{GP classifier})$$

and the SVM solution

$$\arg \min_{\mathbf{f}} \frac{1}{2} \mathbf{f}^\top \mathbf{K}^{-1} \mathbf{f} + C \sum_{i=1}^n L\left(y^{(i)}, f\left(\mathbf{x}^{(i)}\right)\right) \quad (\text{SVM classifier}).$$

# COMPARISON: GP VS. SVM

- Both the Hinge loss and the Bernoulli loss are monotonically decreasing with increasing margin  $yf(\mathbf{x})$ .
- The key difference is that the hinge loss takes on the value 0 for  $yf(\mathbf{x}) \geq 1$ , while the Bernoulli loss just decays slowly.
- It is this flat part of the hinge function that gives rise to the sparsity of the SVM solution.
- We can see the SVM classifier as a “sparse” GP classifier.

