

Chapter 7 - Fetch API

Asst.Prof. Dr. Umaporn Supasitthimethee

ผศ.ดร.อุมพร สุภสีทธิเมธี



Synchronous/Asynchronous

Asynchronous vs. Synchronous

- **Synchronous** tasks are performed one at a time and only **when one is completed, the following is unblocked**. In other words, you need to wait for a task to finish to move to the next one.
- **Asynchronous** software design expands upon the concept by building code that allows a program to ask that a task be performed alongside the original task (or tasks), **without stopping to wait for the task to complete**. When the secondary task is completed, the original task is notified using an agreed-upon mechanism so that it knows the work is done, and that the result, if any, is available.

```
console.log(`hello `)  
console.log('world, ')  
console.log('bye')
```

hello
World
Bye

```
console.log(`hello `)  
setTimeout(() => console.log('world, '), 3000)  
console.log('bye')
```

hello
Bye
world

Asynchronous Functions

In JavaScript, a **callback function** is a function that **is passed into another function as an argument**.

This function can then be invoked during the execution of that higher order function.

Since, in JavaScript, functions are objects, functions can be passed as arguments.

```
console.log('Hello')  
//setTimeout is an  
//asynchronous function  
setTimeout(function () {  
    console.log('JS')  
}, 5000)  
  
console.log('Bye bye')
```

```
//Console  
  
Hello  
Bye bye  
  
//until 5 seconds  
JS
```


[setTimeout\(\)](#) executes a particular block of code once after a specified time has elapsed.

`setTimeout()` is an asynchronous function, meaning that the timer function will not pause execution of other functions in the functions stack.



Promise

Promises

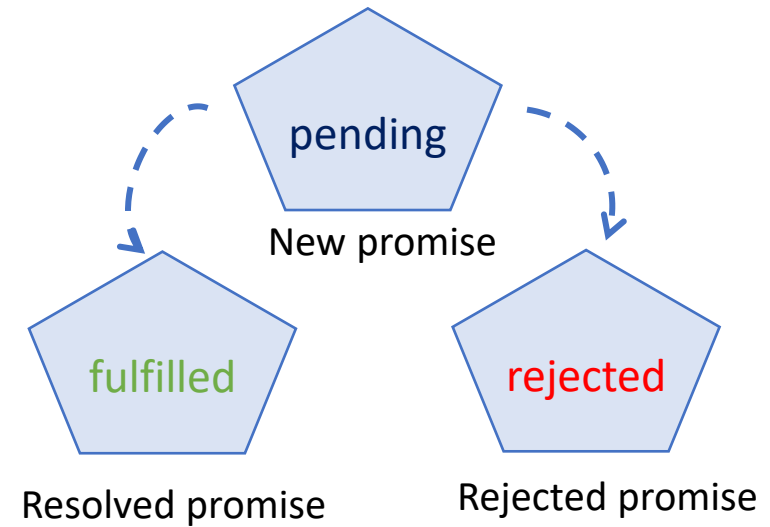

- Promises are ***asynchronous***.
- *“I **promise** to do this **whenever** that is true. If it isn't true, then I won't.”*
- With Promises, we can defer execution of a code block until an async request is completed. This way, other operations can keep running without interruption.
- Promises have three states:
 - ***pending***: initial state, neither fulfilled nor rejected.
 - ***fulfilled***: meaning that the operation was completed successfully.
 - ***rejected***: meaning that the operation failed.



Creating a Promise

- The **Promise** object represents the eventual completion (or failure) of an asynchronous operation and its resulting value.
- The **Promise** object is created using the `new` keyword and contains the promise;
- This is an executor function which has a `resolve` and a `reject` callback

```
const promise = new Promise(function(resolve, reject)
{
    // promise description
})
```

Using Promises *.then()*

- `.then()` receives a function with an argument which is the resolve value of our promise.
- `.catch()` returns the reject value of our promise

```
async function doSomething(done) {  
  return new Promise((resolve, reject) => {  
    console.log('waiting...')  
    setTimeout(() => {  
      done ? resolve('success') : reject('failure')  
    }, 5000)  
  })  
}
```

```
async function thenDoSomething(result) {  
  doSomething(result)  
    .then((x) => {  
      console.log(x + ', your activity is success')  
    })  
    .catch((error) => {  
      console.log(`${error}, your activity fails`)  
    })  
}  
thenDoSomething(false)
```

waiting...
failure, your activity fails

Using Promises *async/await*

- `async` function returns a promise -- if the function returns a value, the promise will be resolved with the value, but if the `async` function throws an error, the promise is rejected with that value.
- `await` keyword is only used in an `async` function to ensure that all promises returned in the `async` function are synchronized
- `await` eliminates the use of callbacks in `.then()` and `.catch()`

```
async function doSomething(done) {  
  return new Promise((resolve, reject) => {  
    console.log('waiting...')  
    setTimeout(() => {  
      done ? resolve('success') : reject('failure')  
    }, 5000)  
  })  
}
```

```
async function waitingSomething(result) {  
  try {  
    const x = await doSomething(result)  
    console.log(x + ', your activity is success')  
  } catch (e) {  
    console.log(`${error}, your activity fails`)  
  }  
}  
  
waitingSomething(true)
```

waiting...
success, your activity is success



REST API



REST APIs

- Representational State Transfer (REST) APIs communicate via HTTP requests to perform standard functions like creating, reading, updating, and deleting records (also known as CRUD) within a resource.
- Request headers and parameters are also important in REST API calls because they include important information such as metadata, authorizations, uniform resource identifiers (URIs), cookies and more.
- The representation of a resource most often be JSON, HTML or XML. JSON is popular because it's readable by both humans and machines.

JSON structure


- **JSON is a string** whose format very much resembles JavaScript object literal format.
- JSON **requires double quotes** to be used around strings and property names. **Single quotes are not valid** other than surrounding the entire JSON string.
- You can include the same basic data types inside JSON as you can in a standard JavaScript object — strings, numbers, arrays, booleans, and other object literals.
- JSON is purely a string with a specified data format — **it contains only properties, no methods**.
- We can also convert arrays to/from JSON.

```
{
  "squadName": "Super hero squad",
  "homeTown": "Metro City",
  "formed": 2016,
  "secretBase": "Super tower",
  "active": true,
  "members": [
    {
      "name": "Molecule Man",
      "age": 29,
      "secretIdentity": "Dan Jukes",
      "powers": [
        "Radiation resistance",
        "Turning tiny",
        "Radiation blast"
      ]
    },
    {
      "name": "Madame Uppercut",
      "age": 39,
      "secretIdentity": "Jane Wilson",
      "powers": [
        "Million tonne punch",
        "Damage resistance",
        "Superhuman reflexes"
      ]
    }
  ],
  {
    "name": "Eternal Flame",
    "age": 1000000,
    "secretIdentity": "Unknown",
    "powers": [
      "Immortality",
      "Heat Immunity",
      "Inferno",
      "Teleportation",
      "Interdimensional travel"
    ]
  }
}
```

```
[
  {
    "name": "Molecule Man",
    "age": 29,
    "secretIdentity": "Dan Jukes",
    "powers": [
      "Radiation resistance",
      "Turning tiny",
      "Radiation blast"
    ]
  },
  {
    "name": "Madame Uppercut",
    "age": 39,
    "secretIdentity": "Jane Wilson",
    "powers": [
      "Million tonne punch",
      "Damage resistance",
      "Superhuman reflexes"
    ]
  }
]
```

Three elements in REST API

- **Request**—This is the data you send to the API across HTTP Protocol
- **Response**—Any data you get back from the server after a successful / failed request.
- **Headers**—Additional metadata passed to the API to help the server understand what type of request it is dealing with, for example “content-type”

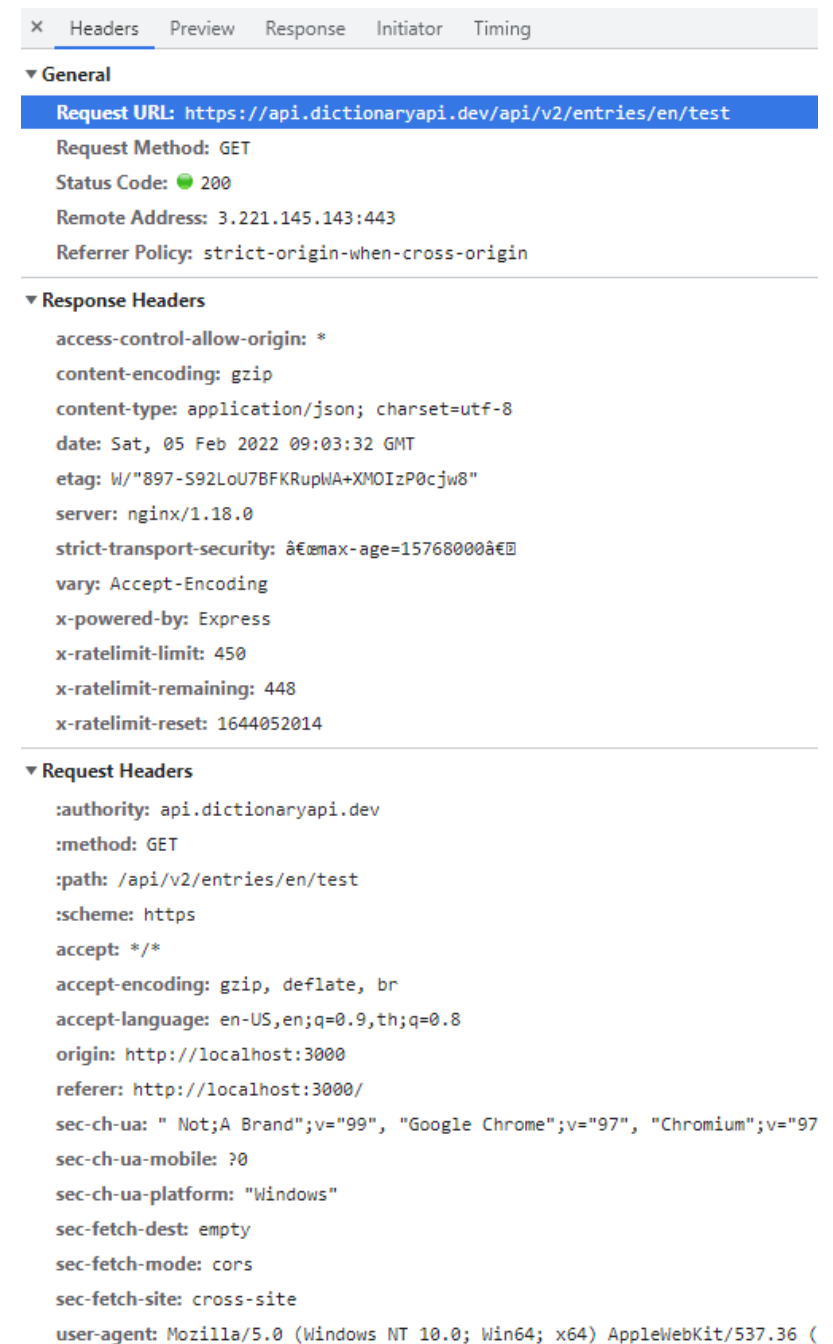

The screenshot displays the 'Headers' tab in a web browser's developer tools. The 'General' section shows the request details: Request URL is `https://api.dictionaryapi.dev/api/v2/entries/en/test`, Request Method is `GET`, Status Code is `200` (OK), Remote Address is `3.221.145.143:443`, and Referrer Policy is `strict-origin-when-cross-origin`. The 'Response Headers' section lists various headers including `access-control-allow-origin: *`, `content-encoding: gzip`, `content-type: application/json; charset=utf-8`, `date: Sat, 05 Feb 2022 09:03:32 GMT`, `etag: W/"897-S92LoU7BFKRupWA+XMOIzP0cjw8"`, `server: nginx/1.18.0`, `strict-transport-security: max-age=15768000`, `vary: Accept-Encoding`, `x-powered-by: Express`, `x-ratelimit-limit: 450`, `x-ratelimit-remaining: 448`, and `x-ratelimit-reset: 1644052014`. The 'Request Headers' section lists headers such as `:authority: api.dictionaryapi.dev`, `:method: GET`, `:path: /api/v2/entries/en/test`, `:scheme: https`, `accept: /*`, `accept-encoding: gzip, deflate, br`, `accept-language: en-US,en;q=0.9,th;q=0.8`, `origin: http://localhost:3000`, `referer: http://localhost:3000/`, `sec-ch-ua: "Not;A Brand";v="99", "Google Chrome";v="97", "Chromium";v="97"`, `sec-ch-ua-mobile: ?0`, `sec-ch-ua-platform: "Windows"`, `sec-fetch-dest: empty`, `sec-fetch-mode: cors`, `sec-fetch-site: cross-site`, and `user-agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (`.

Using HTTP Methods for RESTful Services

HTTP Verb	CRUD	Entire Collection (e.g. /customers)	Specific Item (e.g. /customers/{id})
POST	Create	201 (Created), 'Location' header with link to /customers/{id} containing new ID.	404 (Not Found), 409 (Conflict) if resource already exists..
GET	Read	200 (OK), list of customers. Use pagination, sorting and filtering to navigate big lists.	200 (OK), single customer. 404 (Not Found), if ID not found or invalid.
PUT	Update/Replace	405 (Method Not Allowed), unless you want to update/replace every resource in the entire collection.	200 (OK) or 204 (No Content). 404 (Not Found), if ID not found or invalid.
PATCH	Update/Modify	405 (Method Not Allowed), unless you want to modify the collection itself.	200 (OK) or 204 (No Content). 404 (Not Found), if ID not found or invalid.
DELETE	Delete	405 (Method Not Allowed), unless you want to delete the whole collection—not often desirable.	200 (OK). 404 (Not Found), if ID not found or invalid.



Using Fetch API

- The Fetch API provides a JavaScript interface for accessing and manipulating parts of the HTTP pipeline, such as requests and responses.
- It also provides a global `fetch()` method that provides an easy, logical way **to fetch resources asynchronously across the network.**



fetch()

```
fetch(resource [, init])
```

resource

This defines the resource that you wish to fetch including a URL object — that provides the URL of the resource you want to fetch.

init Optional

An object containing any custom settings that you want to apply to the request. The possible options are:

- **method:**
The request method, e.g., GET, POST.
- **headers:**
Any headers you want to add to your request, contained within a Headers object or an object literal with String values.
- **body:**
Any body that you want to add to your request. Note that a request using the GET method cannot have a body.



Using Fetch API

- The `fetch()` method takes one mandatory argument, the path to the resource you want to fetch.
- It returns a promise that resolves to the response to that request — as soon as the server responds with headers — even if the server response is an HTTP error status.

```
function fetch(url) {  
  return new Promise(function (resolve, reject) {  
    // promise description  
  })  
}
```

```
fetch('http://example.com/movies.json')  
  .then(response => response.json())  
  .then(data => console.log(data));
```

json()

- The `json()` method of the Response interface takes a response stream and reads it to completion. It returns a promise which resolves with the result of parsing the body text as JSON.
- Note that despite the method being named `json()`, **the result is not JSON but is instead the result of taking JSON as input and parsing it to produce a JavaScript object.**

```
async function fetchData(endpoint) {  
  try {  
    const res = await fetch(endpoint);  
    const data = await res.json();  
    return data;  
  } catch (error) {  
    throw new Error(res.status);  
  }  
}
```



JSON-Server

README.md

JSON Server

build passing


npm package 0.16.3

Get a full fake REST API with **zero coding** in **less than 30 seconds** (seriously)

Created with <3 for front-end developers who need a quick back-end for prototyping and mocking.

- [Egghead.io free video tutorial - Creating demo APIs with json-server](#)
- [JSONPlaceholder - Live running version](#)
- [My JSON Server](#) - no installation required, use your own data

See also:

-  [husky](#) - Git hooks made easy
-  [hotel](#) - developer tool with local .localhost domain and https out of the box

JSON-Server Steps

1. Install JSON Server

```
npm install json-server
```

หมายเหตุ ถ้าเพิ่ม -g (หมายถึง global ใช้ได้ทุก project)

2. Create a " ./data/db.json " file with some data

```
{  
  "posts": [  
    { "id": "1", "title": "a title", "views": 100 },  
    { "id": "2", "title": "another title", "views": 200 }  
  ]  
}
```

3. Create script for running json-server backend

```
"scripts": {  
  "backend": "json-server --watch ./data/db.json --port 5000"  
}
```

Create script to run JSON-Server (*package.json*)

package.json

```
"scripts": {  
  "dev": "vite",  
  "build": "vite build",  
  "preview": "vite preview",  
  "backend": "json-server --watch ./data/db.json --port 5000"  
},  
"dependencies": {  
  "json-server": "^0.17.2",  
  "vue": "^3.2.47"  
},
```

npm run backend

```
> json-server --watch ./data/db.json --port 5000  
  
\{^_^}/ hi!  
  
Loading ./data/db.json  
Done  
  
Resources  
http://localhost:5000/photos  
  
Home  
http://localhost:5000
```

JSON-Server Resources and EndPoints

```
{
  "posts": [
    { "id": "1", "title": "a title", "views": 100 },
    { "id": "2", "title": "another title", "views": 200 }
  ],
  "comments": [
    { "id": "1", "text": "a comment about post 1", "postId": "1" },
    { "id": "2", "text": "another comment about post 1", "postId": "1" }
  ]
}
```

Resources

<http://localhost:5000/posts>

<http://localhost:5000/comments>



JSON-Server Endpoints

<http://localhost:5000/posts>

```
[  
  { "id": "1", "title": "a title", "views": 100 },  
  { "id": "2", "title": "another title", "views": 200 }  
]
```

<http://localhost:5000/posts/1>

```
{ "id": "1", "title": "a title", "views": 100 }
```




Env Variables and Modes

Env Variables and Modes

(put .env file at root project)


- Env variables start with “yourVariableName”
- .env file for loaded in all cases
- .env.[mode] only loaded in specified mode

//.env

```
#.env
VITE_BASE_URL=http://localhost:5000
DB_PASSWORD=foo
```

//.env.production (only on build production)

```
#.env.production
VITE_BASE_URL=http://example.com
DB_PASSWORD=foo
```

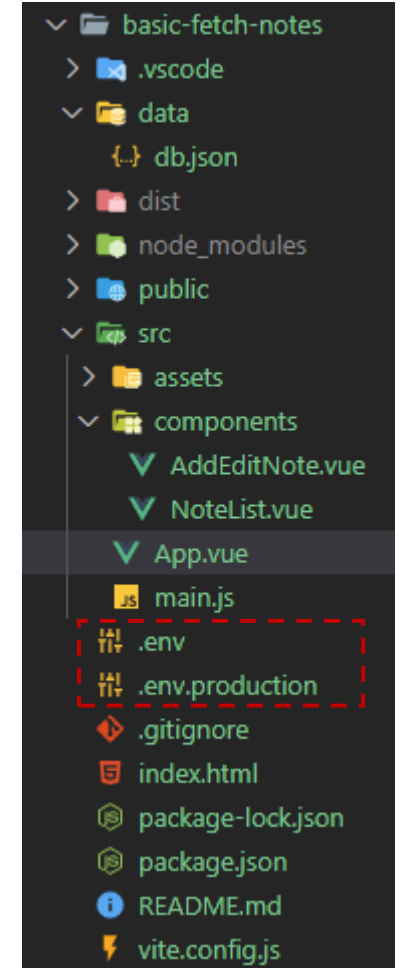

Env Variables and Modes

- To prevent accidentally leaking env variables to the client, only variables prefixed with `VITE_` are exposed to your Vite-processed code. e.g. for the following env variables:


//.env

```
VITE_SOME_KEY=123  
DB_PASSWORD=foobar
```

Your source file

```
console.log(import.meta.env.VITE_SOME_KEY) // 123  
console.log(import.meta.env.DB_PASSWORD) // undefined
```

Only `VITE_SOME_KEY` will be exposed as `import.meta.env.VITE_SOME_KEY` to your client source code, but `DB_PASSWORD` will not.




Fetch API CRUD

Prepare your JSON

```
[
  {
    "id": "1",
    "category": "home",
    "description": "Buy groceries"
  },
  {
    "id": "2",
    "category": "work",
    "description": "Finish project report"
  },
  {
    "id": "3",
    "category": "home",
    "description": "Clean the house"
  },
]
```

<https://www.npmjs.com/package/json-server/v/1.0.0-alpha.23>

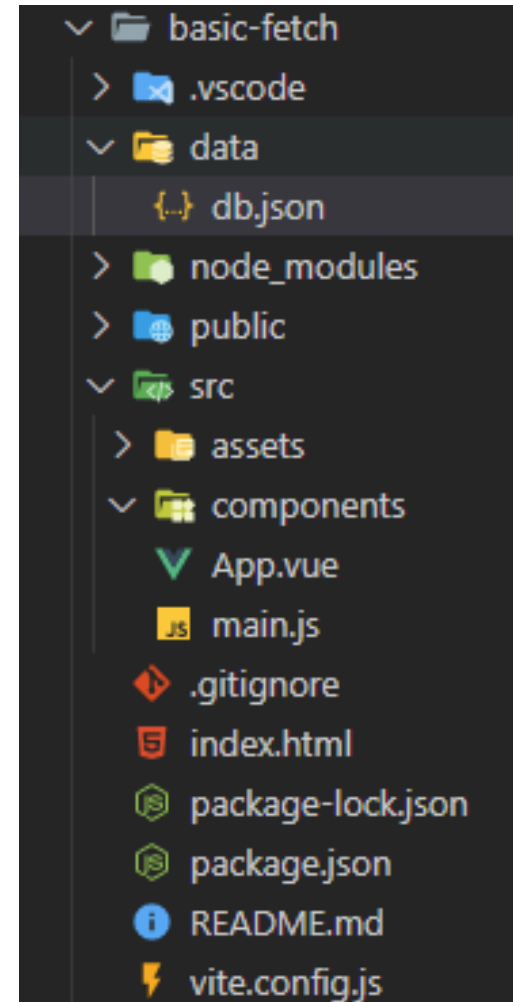

GET method

async-await

```
async function getTodos() {  
  try {  
    const res = await  
    fetch('https://localhost:5000/todos')  
    const data = await res.json()  
    console.log(data)  
  } catch (error) {  
    console.error('Error:', error)  
  }  
}
```

promise.then()

```
fetch('https://localhost:5000/todos')  
  .then(res => response.json())  
  .then(data => console.log(data))  
  .catch((error) => console.error('Error:',  
error))
```

Fetch contains HTTP response, not the actual JSON. This includes headers, status code, etc. To extract the JSON body content from the response, we use the `json()` method.

POST (Add) method

async-await

```
async function createTodo() {
  try {
    const res = await fetch('https://localhost:5000/todos', {
      method: 'POST',
      headers: {
        'Content-Type': 'application/json',
      },
      body: JSON.stringify({
        category: 'Home',
        description: 'Buy milk',
      }),
    })
    const addedTodo = await res.json()
    //frontend data handle here
  } catch (error) {
    console.error('Error:', error)
  }
}
```

promise.then()

```
fetch('https://localhost:5000/todos', {
  method: 'POST',
  headers: {
    'Content-Type': 'application/json',
  },
  body: JSON.stringify({
    category: 'Home',
    description: 'Buy milk',
  }),
})
.then(res => res.json())
.then(addedTodo => //frontend data handle here)
.catch((error) => console.error('Error:', error))
```

****The `JSON.stringify()` method converts a JavaScript object or value to a JSON string.**

`console.log(JSON.stringify({ x: 5, y: 6 })); // expected output: '{"x":5,"y":6}'`

*The fetch first parameter should always be the URL, a second JSON object with options like method, headers, request body, and so on.

DELETE method

async-await

```
async function deleteTodo() {  
  try {  
    const res = await fetch('https://localhost:5000/todos/1', {  
      method: 'DELETE',  
    })  
    if(res.status === 200){  
      console.log('Deleted')  
      //frontend data handle here  
    }  
  } catch (error) {  
    console.error('Error:', error)  
  }  
}
```

promise.then()

```
fetch('https://localhost:5000/todos/1', {  
  method: 'DELETE',  
})  
  .then((res) => {  
    if(res.status === 200)  
      console.log('Deleted')  
      //frontend data handle here  
  })  
  .catch((error) => console.error('Error:', error))
```


PUT (Update with Replace) method

replaces an existing entire to-do item or creates new if it does not exist.

Async-Await

```
async function updateTodo() {
  try {
    const res = await fetch('https://localhost:5000/todos/1', {
      method: 'PUT',
      headers: {
        'Content-Type': 'application/json',
      },
      body: JSON.stringify({
        category: 'Work',
        description: 'Prepare meeting notes',
      }),
    })
    const editedTodo = await res.json()
    //frontend data handle here
  } catch (error) {
    console.error('Error:', error)
  }
}
```

PUT (Update with Replace) method

promise.then()

```
fetch('https://localhost:5000/todos/1', {
  method: 'PUT',
  headers: {
    'Content-Type': 'application/json',
  },
  body: JSON.stringify({
    category: 'Work',
    description: 'Prepare meeting notes',
  }),
})
.then(res => {
  const editedTodo = res.json()
  //frontend data handle here
})
.catch((error) => console.error('Error:', error))
```

PATCH (Update with Modify) method

partially updates an existing to-do item without modifying the other field.

Async-Await

```
async function patchTodo() {
  try {
    const res = await fetch('https://localhost:5000/todos/1', {
      method: 'PATCH',
      headers: {
        'Content-Type': 'application/json',
      },
      body: JSON.stringify({
        description: 'Prepare meeting notes and presentation',
      }),
    })
    const editedTodo = await res.json()
    //frontend data handle here
  } catch (error) {
    console.error('Error:', error)
  }
}
```

PATCH (Update with Modify) method

promise.then()

```
fetch('https://localhost:5000/todos/1', {
  method: 'PATCH',
  headers: {
    'Content-Type': 'application/json',
  },
  body: JSON.stringify({
    description: 'Prepare meeting notes and presentation',
  }),
})
.then(res => {
  const editedTodo = res.json()
  //frontend data handle here
})
.catch((error) => console.error('Error:', error))
```



Fetch API

Demo TodoList Project

ToDoList (Add/Edit/Delete/List)

1

home

Buy groceries

EditDelete

2

work

Finish project report

EditDelete

3

home

Clean the house

EditDelete

4

work

Attend meeting at 2 PM

EditDelete

5

home

Water the plants

EditDelete

6

work

Reply to emails

EditDelete

7

home

Prepare dinner

EditDelete

Add New Todo

Category ☐ home ☐ work

Description

close

1

home

Buy groceries

EditDelete

2

work

Finish project report

EditDelete

3

home

Clean the house

EditDelete

4

work

Attend meeting at 2 PM

EditDelete

5

home

Water the plants

EditDelete

6

work

Reply to emails

EditDelete

7

home

Prepare dinner

EditDelete

Editing Todo

Category ☐ home ☒ work

Description

SaveCancel

TodoList

App.vue

.env VITE_BASE_URL

TodoManager.vue (onMounted call endpoint to get todos)

libs

-TodoManagement.js
-fetchUtils.js

TodoList.vue (['todos'])

--(['deleteTodo', 'editMode'])

item

ListModal.vue (['items'])

BaseCard.vue (['size', 'variant'])

AddEditTodo.vue (['todo'])

--(['saveNewTodo', 'closeModal'])