TATA CONSULTANCY SERVICES
Experience certainty.

# CERSAI 2.0 – API Specifications Document- SI Satisfaction

**TATA Consultancy Services Ltd.**

11 November, 2023

Ver. 1.1

## Copyright

The data, designs, flowcharts and ideas contained herein will not be disclosed, duplicated, or used in whole or in part for any purpose other than to evaluate the proposal, provided that if a contract is awarded to this offer as a result of, or in connection with, the submission of these data, the propose will have the right to duplicate, use or disclose the data to the extent provided in the agreement.

All trademarks that appear in the document have been used for identification purposes only and belong to their respective companies.

## Tata Code of Conduct

Tata Consultancy Services Limited (TCS), in its dealings, is self-regulated by a Code of Conduct as enshrined in the "Tata Code of Conduct". TCS requests that any violation or potential violation of the Code by any person be promptly brought to the notice of the Local Ethics Counsellor or the Principal Ethics Counsellor or the MD of TCS. All communication received in this regard will be treated and kept as confidential.

## Document Revision History

| Version No. | Date | Revision/Changes | Author | Reviewer |
|---|---|---|---|---|
| 1.1 | November 11, 2023 | Updated API Registration steps and Added API Amendment Steps and Exceptions Details. | Suraj Prajapati | Vibha Bhardwaj |
| 1.0 | June 05, 2022 | API SpecificationsDocument for CERSAI 2.0 – draft version. | Suraj Prajapati | Uminder Khatri |

# Contents

Copyright ..... 2

Tata Code of Conduct ..... 2

Document Revision History ..... 3

List of Abbreviation ..... 6

**1. Introduction** ..... 7

**2. Pre-requisites** ..... 8

**3. Process Flow** ..... 9

Consuming the APIs ..... 10

**4. Steps for Registration for API** ..... 11

**5. Steps for Amendment of API** ..... 13

**6. Satisfaction of Security Interest API** ..... 15

URL ..... 15

API Request (Encrypted) ..... 15

API Request (Un-encrypted) ..... 16

API Request Attributes ..... 17

API Response (Encrypted) ..... 18

API Response (Un-encrypted) ..... 19

API Response Attributes ..... 20

API Server Side Validation Error Response (Encrypted) ..... 21

API Server Side Validation Error Response (Un-encrypted) ..... 21

API Response Attributes ..... 21

**Annexure I: Sample Requests and Responses** ..... 22

**Annexure II: Server-Side Validations – Security Interest Satisfaction of Security Interest Details –** ..... 29

**Annexure III: Exception – Error Code and Description for Security Interest Satisfaction** ..... 31

## List of Tables

Table 1: List of Abbreviations ..... 6

Table 2: Satisfaction of Security Interest / Attachment Order API Request Attributes ..... 17

Table 3 : Satisfaction of Security Interest / Attachment Order API Response Attributes ..... 20

Table 4: Server Side Validation Error API Response Attributes ..... 21

Table 5: Field Validation for Security Interest ..... 29

Table 6: Field Validation for Transaction ..... 30

Table 7: Error Code and Description for Security Interest Satisfaction ..... 31

## List of Abbreviation

This section provides the details of the abbreviations used in the document.

Table 1: List of Abbreviations

| Abbreviation | Expanded Form |
|---|---|
| CERSAI | Central Registry of Securitisation Asset Reconstruction and Security Interest of India |
| API | Application Programming Interface |
| TCS | Tata Consultancy Services Limited |
| MD | Managing Director |
| SARFAESI | Securitisation and Reconstruction of Financial Assets and Enforcement of Security Interest Act, 2002 |
| PUA | Primary User Administrator |
| RSA | Rivest-Shamir-Adleman Assymetric encryption algorithm |
| REST | Reprtesentational State Transfer |
| JSON | Javascript Object Notation |
| AES | Advanced Encryption Standard symmetric encryption algorithm |
| URL | Universal Resource Locator |

# 1. Introduction

Central Registry of Securitisation Asset Reconstruction and Security Interest of India (CERSAI) is a Government of India company licensed under section 8 of the Companies Act, 2013 with Govt. of India having a shareholding of 51% by the Central Government and select Public Sector Banks and the National Housing Bank also being shareholders of the Company. The objective of the company is to maintain and operate a Registration System for the purpose of registration of transactions of securitization, asset reconstruction of financial assets and creation of security interest over property, as contemplated under Chapter IV of the Securitization and Reconstruction of Financial Assets and Enforcement of Security Interest (SARFAESI) Act, 2002.

To provide this mechanism, a web-based system was developed for registration of transaction by financial institutions. It enables lenders and other stake holders to get real time current information regarding the collateral being mortgaged by borrower which helps in preventing fraudulent transactions arising out of same asset being mortgaged with multiple lenders. It also provides potential buyers of assets with information about any encumbrances on the assets.

The functionalities and the end users of the Central Registry have increased steadily over a period of time since the Central Registry was operationalised on 31st Mar 2011. CERSAI has developed certain APIs to cater to the increased load on the Central Registry Portal as well as to provide a better end-user experience. This document provides the specifications for the Security Interest registration API.

# 2. Pre-requisites

In order to consume the APIs exposed by CERSAI, the following pre-requisites must be fulfilled:

1. Consumer entity must be a registered entity in the Central Registry portal.
2. Consumer Entity must have successfully registered the Security Interest and must have Security Interest Id registered in the Central Registry.
3. Consumer entity must have a valid class III digital signature.
4. Consumer entity will have to fill and submit the API Requisition Form. Only upon approval on the API Requisition Form by CERSAI, the consumers will be able to consume the API.
5. Consumer entity must incorporate all the relevant master data required for consuming the APIs. The master data can be downloaded from the 'Downloads' section of the CERSAI portal.

# 3. Process Flow

The process flow for consuming CERSAI 2.0 APIs is mentioned below:

1. Any entity that wants to consume the CERSAI APIs will have to first fill an API registration form through the portal. The PUA users of the entity will have the authorisation for filling this form.
2. A valid class III digital signature is required for performing this step. This digital signature will be required for signing all the API requests and hence, need to be plugged in / present on the consuming server all the time.
3. After filling in the necessary details and selecting the digital signature, the PUA will submit the form. Upon submission, the request will come to CERSAI admin users for approval.
4. After CERSAI admin user has successfully approved the request, the system will generate:
    - 4.1. A new channel key. This channel key will be required to be passed in all API requests.
    - 4.2. A new user Id and password, to be used exclusively for consuming the APIs.
    - 4.3. A new RSA key pair. The public key will be shared with the institution while the private key will be maintained in the system.

NOTE: Entities who have already performed API Registration for SI Satisfaction, can skip the registration steps and can start with the consuming the API.

## Consuming the APIs

1. For consuming API, the consumer entity will have to first test the API in the non-production environment of CERSAI. Only after successfully testing the API in the non-production environment, the production environment will be enabled for the consumer entity.
2. All the APIs exposed by CERSAI will be REST APIs. The request and response payloads will be in JSON format.
3. Each API payload will be having two sections – 'header' and 'body'.
4. The header section will contain the attributes related to authentication and authorisation of the API request.
5. The body section will further contain three main attributes – 'additional info', 'session key' and 'request payload'.
6. For consuming the APIs, the consuming system will have to digitally sign the SecurityInterestDetails object using the digital signature that was registered on the CERSAI portal while filling the API registration form and then pass the signed value to RequestHash attribute of RequestPayload.
7. After SecurityInterestDetails is successfully digitally signed and RequestHash is created, a new unique AES256 session key and 16-byte IV paramater will have to be generated. Then, the RequestPayload (containing securityInterestDetails & RequestHash) will then have to be encrypted using this session key and IV parameter.
8. The session key, IV parameter and the password will have to be then encrypted using the public key shared with the entity during the API registration process.
9. Encode the encrypted data to base-64 and invoke the API.
10. The response from CERSAI will only be encrypted using session key received in the API Request and encoded to base-64.

# 4. Steps for Registration for API

4.1 Open URL:- https://www.qa.cersai.org.in/CERSAI/home.prg

4.2 Login using User ID and Password of Primary User Admin.

4.3 Once login, Under Menu option, Choose API/Batch registration under Entity Management Option.

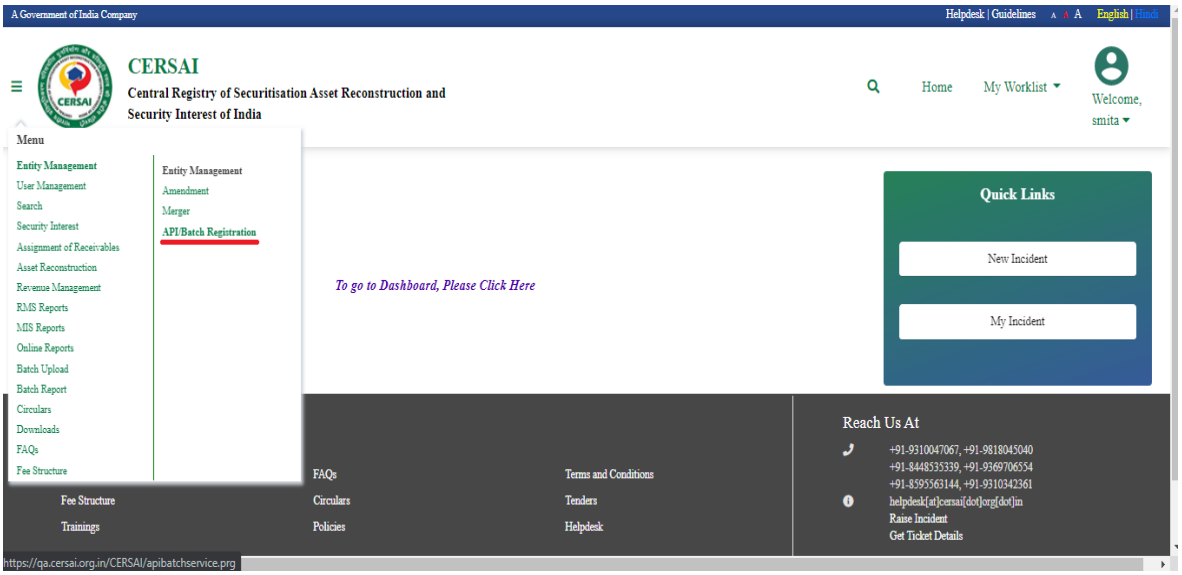


4.4 Form will open, fill the required details (Password entered on the screen will be of API user and will be used for every API request)

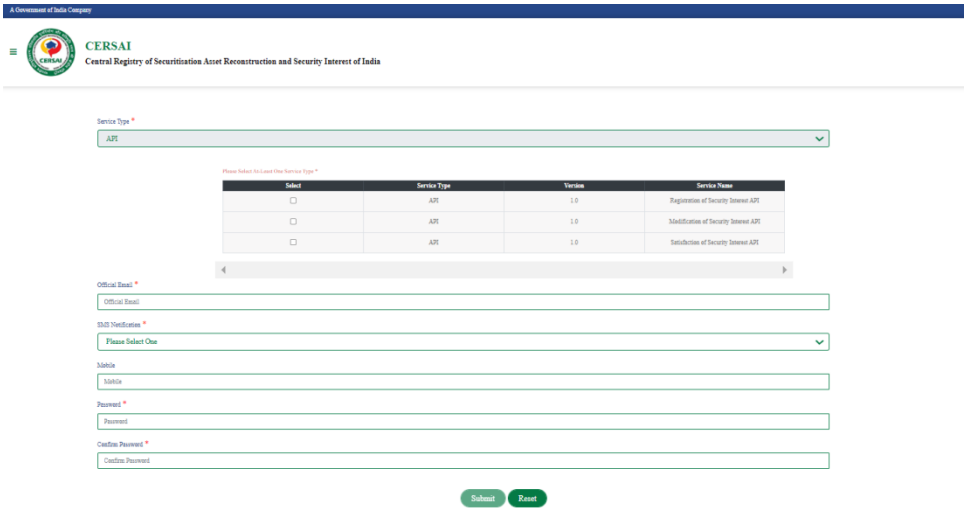


4.5 Click on Submit button once data is entered.

4.6 Pop-up for digital signature will appear where the user have to use different digital signature for the registration process as this Digital Signature will be linked to the API user and will be used in every request to digitally sign the payload of every request.

4.7 Once above steps will be done. You will get a system generated mail from our side, which include a Channel Key, RSA Public Key and API User ID.

# 5. Steps for Amendment of API

5.1 OpenURL: -https://www.qa.cersai.org.in/CERSAI/home.prg

5.2 Login using User ID and Password of Primary User Admin.

5.3 Once login, Under Menu option, Choose API Amendment under Entity Management option.

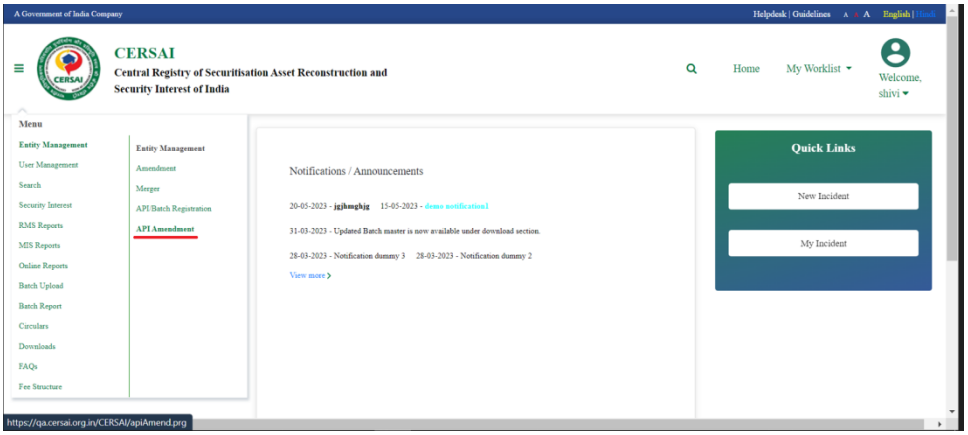


5.4 Form will open, enter API Login Id which user had received on mail after successful API Registration

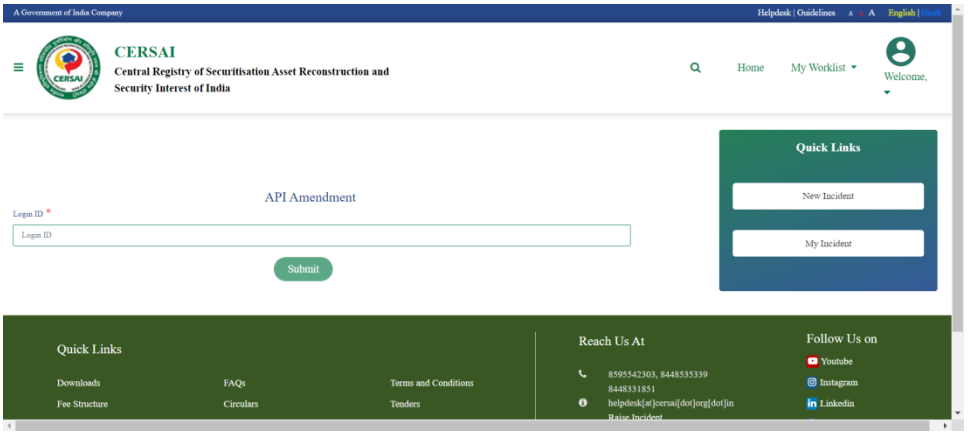


5.5 Click on Submit button once data is entered.

5.6 Form will open, Select the field which is you want to amend.

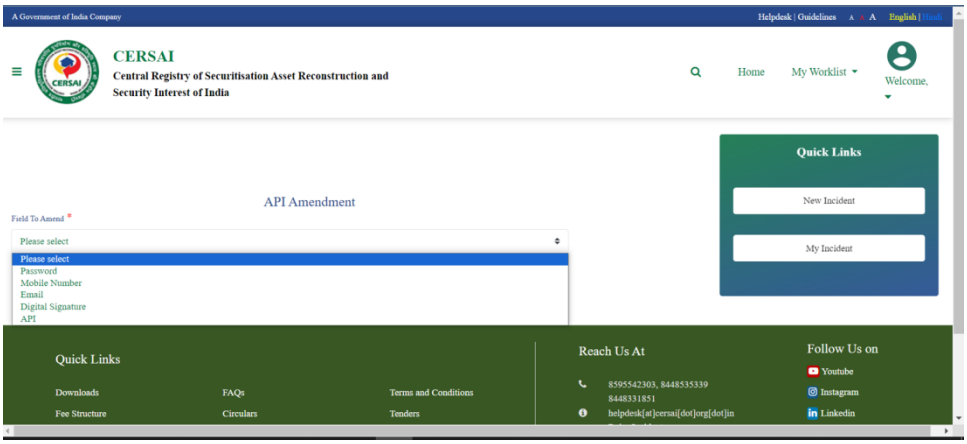


5.7 Once field is selected, form will open, if Password field is selected to amend.

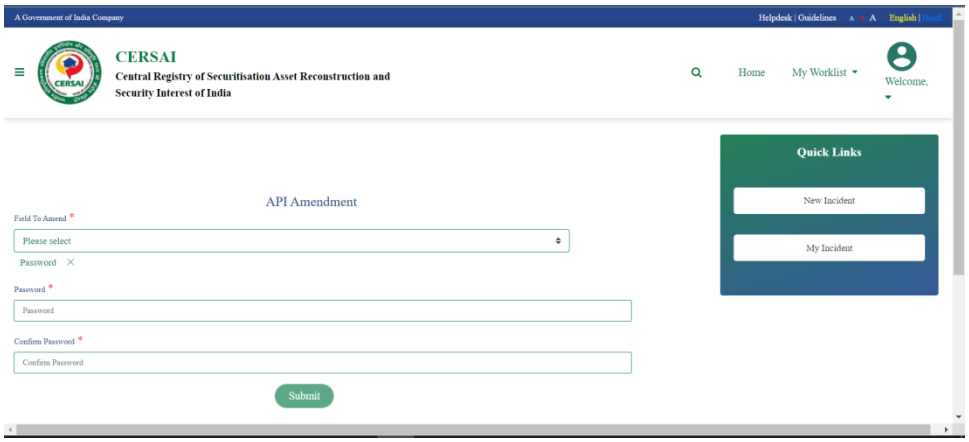


5.8 Form will open, if all fields are selected to amend.

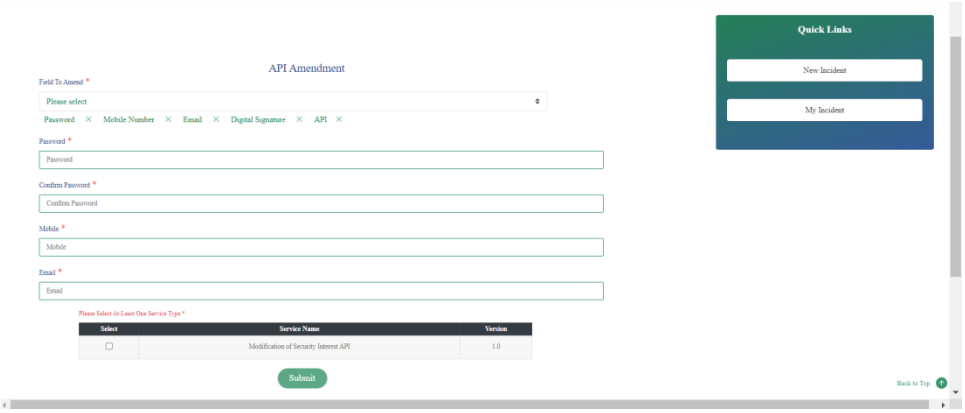


5.9 Click on Submit button once data is entered.

5.10 User will get the following message:

Your API has been amended Successfully and your Transaction ID is 20XXXXXXXX

# 6. Satisfaction of Security Interest API

This section describes the API for Satisfaction of Security Interest / Attachment Order transactions.

## URL

The URL for the API will be shared separately with the approved entities.

## API Request (Encrypted)


```
{
        "header": {
          "authinfo": {
          "LoginParams": [
                "APILOGIN",
                      "<<API User Id>>",
                      "<<API User Password, create hash using SHA256, encrypt using pre-shared RSA public key, base-64 encoded>>"
          ],
          "UserType": "APIUSER",
          "AuthenticationType": "AUTH_API"
          }
      },
      "body": {
          "AdditionalInfo": {
                "EntityCode": "<<Consumer entity code, plain text>>",
                "IV": "<<Create 16-byte IV parameter, Convert to String, encrypt using pre-shared RSA public key, base-64 encoded>>"

          },
          "SessionKey": "<<Unique AES256 key, encryptusing pre-shared RSA public key, base-64 encoded >>",
          "RequestPayload": "<<encrypt using AES256 session key and 16-byte IV parameter, base-64 encoded>>"
      }
}
```

## API Request (Un-encrypted)


```
{
    "header": {
        "authinfo": {
            "LoginParams": [
                "APILOGIN",
                "<<API User Id>>",
                "<<API User Password, create hash using SHA256, encrypt
               using pre-shared RSA public key, base-64 encoded>>"
            ],
            "UserType": "APIUSER",
            "AuthenticationType": "AUTH_API"
        }
    },
    "body": {
        "AdditionalInfo": {
            "EntityCode": "<<Consumer entity code, plain text>>",
            "IV": "<<Create 16-byte IV parameter, Convert to String, encrypt
           using pre-shared RSA public key, base-64 encoded>>"
        },
        "SessionKey": "<<Unique AES256 key, encrypt using pre-shared
       RSA public key, base-64 encoded >>",
        "RequestPayload": {
            "securityInterestDetails": {
                "securityInterest": {
                    "securityInterestId": 401XXXXXXXX5,
                    "satisfactionDate": "2023-04-10",
                    "satisfactionReason": "Loan Repaid",
                    "satisfactionReasonOtherDesc": ""
                },
                "transaction": {
                    "processId": 4,
                    "omissionReasonCategory": "",
                    "omissionReason": "",
                    "transactionMode": "A"
                }
            }
        }
    }
}
```

## API Request Attributes

Table 2: Satisfaction of Security Interest / Attachment Order API Request Attributes

| Sr. No. | Attribute Name | Data Type | Is Mandatory? | Remarks |
|---|---|---|---|---|
| | **header** | | | |
| | **authinfo** | | | |
| 1 | LoginParams | | | |
| 1(a) | APILOGIN | Constant | Yes | Constant value: “APILOGIN” |
| 1(b) | API User Id | String | Yes | API User Id |
| 1(c) | API User Password | String | Yes | API Password |
| 2 | UserType | Constant | Yes | Constant value: “APIUSER” |
| 3 | AuthenticationType | Constant | Yes | Constant value: “AUTH_API” |
| | **body** | | | |
| 4 | **AdditionalInfo** | | | |
| 4(a) | EntityCode | String | Yes | CERSAI entity code |
| 4(b) | IV | String | Yes | 16-byte IV parameter |
| 5 | SessionKey | String | Yes | Unique AES256 key |
| 6 | **RequestPayload** | | | |
| 7 | **SecurityInterestDetails** | | | |
| 8 | **securityInterest** | | | |
| 8(a) | securityInterestId | Number | Yes | Security Interest Id |
| 8(b) | satisfactionDate | Date | Yes | Satisfaction Date of the security interest |
| 8(c) | satisfactionReason | String | Yes | The Reason for satisfaction |
| 8(d) | satisfactionReasonOtherDesc | String | Yes | Description of the reason in case of Satisfation Reason is Others |
| 9 | **transaction** | | | |
| 9(a) | processId | Constant | Yes | Constant value: “4” |
| 9(b) | OmissionReasonCategory | String | Conditional | Constant value : “Delay” |
| 9(c) | OmissionReason | Date | Yes | Description of the reason in case of Delay |
| 9(d) | transactionMode | String | Yes | Constant Value: “A” |
| **^: Values must be picked from the respective CERSAI masters.** | | | | |

## API Response (Encrypted)


```
{
    "header": {
        "transactionId": "91pfj01XXXXXXXXXXXX010",
        "status": "success"
    },
    "body": "<<encrypted using the AES256 session key and base-64 encoded>>"
}
```


## Note:

If users receive response in html encoded format for eg.


{"header":{"errorMessage":"Server Side Validation Error in SI Satisfaction","errorCode":"21014","transactionid":"2g9s0016824928674831 19","status":"error","errorDetails":"{\"Failure\":\"{\\\"APIResponse\\\":\\\"0q1HM5K2SlLWpqs08L2RbIoxAgUi5X0aSxsM1adRtqcraWKV6yNk512WCshsBkAZMz57Zqc6teB+Y0gZa9yexa/60w0YYheIZfcyHZBnt0o=\\\"}\"}"}}


User needs to perform html decoding, if decrypted 'APIResponse' is received in above format.

Kindly include following line, in case user is using java:

StringEscapeUtils.*unescapeHtml*( "<Decrypted response in HTML encoded format>");

## API Response (Un-encrypted)


```
{
    "header": {
        "transactionId": "91pfj01XXXXXXXXXXXX010",
        "status": "success"
    },
    "body": {
        "APIResponse": {
            "transactionType": "Security Interest",
            "transactionTypeId": 8,
            "transactionSubType": "Equitable Mortgage",
            "processName": "Satisfaction",
            "processId": 4,
            "responseTimestamp": "2023-04-20 22:21:13.83",
            "transationStatus": "C",
            "transactionSubTypeId": 17,
            "responseMessage": "Successfully Satisfied",
            "transactionId": 200XXXXXXXX25,
            "responseCode": "SUCCESS"
        }
    }
}
```

## API Response Attributes

Table 3 : Satisfaction of Security Interest / Attachment Order API Response Attributes

| Sr. No. | Attribute Name | Data Type | Is Mandatory? | Remarks |
|---|---|---|---|---|
| 1 | **header** | | | |
| 1(a) | transactionId | String | Yes | CERSAI Request transaction Id |
| 1(b) | Status | String | Yes | Status of the API request |
| 2 | **body** | | | |
| 2(a) | transactionType | String | Yes | Type of Transaction |
| 2(b) | transactionTypeId | Number | Yes | Id of Type of Transaction |
| 2(c) | transationStatus | String | Yes | Status of the Security Interest transaction |
| 2(d) | transactionId | Number | Yes | Security Interest satisfaction transaction Id |
| 2(e) | transactionSubType | String | No | Not Applicable |
| 2(f) | processId | Number | No | Not Applicable |
| 2(g) | processName | String | No | Not Applicable |
| 2(h) | responseTimestamp | Timestamp | No | Transaction response timestamp |
| 2(i) | transactionSubTypeId | Number | No | Not Applicable |
| 2(j) | responceCode | String | No | Not Applicable |
| 2(k) | responseMessage | String | Yes | SI Satisfaction response message |

## API Server Side Validation Error Response (Encrypted)


```
{
    "header": {
        "errorMessage": "Server Side Validation Error in SI Satisfaction",
        "errorCode": "21014",
        "transactionid": "2g9s001682492867483119",
        "status": "error",
        "errorDetails": "{\"Failure\":\"{\\\"APIResponse\\\":\\\"0q1HM5K2SlLWpqs08L2R
bIoxAgUi5X0aSxsM1adRtqcraWKV6yNk512WCshsBkAZMz57Zqc6teB+Y0gZa9yexa/60w0YYheIZfcyHZBnt
0o=\\\"}\"}"
    }
}
```


## API Server Side Validation Error Response (Un-encrypted)


```
{
    "header": {
        "errorMessage": "Server Side Validation Error in SI Satisfaction",
        "errorCode": "21014",
        "transactionid": "2g9s001682492867483119",
        "status": "error ",
        "errorDetails": "{\"Failure\":\"{\\\"APIResponse\\\":\\\{"securityInterest":
       {"SatisfactionDate": "Future Date Not Acceptable"}}\\\"}\"}"
    }
}
```


## API Response Attributes

Table 4: Server Side Validation Error API Response Attributes

| Sr. No. | Attribute Name | Data Type | Is Mandatory? | Remarks |
|---|---|---|---|---|
| | **header** | | | |
| 1 | errorMessage | String | Yes | CERSAI API Error Message |
| 2 | errorCode | String | Yes | Status of the API request (21001 For Server Side Validation Error in Security Interest Satisfation API) |
| 3 | transactionid | String | Yes | CERSAI Request transaction Id |
| 4 | Status | String | Yes | Status of the API request |
| 5 | errorDetails | String | Yes | Detailed Error Message. |

# Annexure I: Sample Requests and Responses

There are Two Types of Satisfaction option is available to user:

(1) Security Interest:

a. Loan Repaid

b. Others

c. Delay (It's applicable for both SI and AO)

(2) Attachment Order:

a. Stay/ Cancelled/ Settled/ Erroneous Registration

b. Delay (It's applicable for both SI and AO)

This section provides the sample request (unencrypted) and their corresponding response (unencrypted) for each type.

- **Satisfaction Reason: Loan Repaid**

**Request:**

```
{
    "header": {
        "authinfo": {
            "LoginParams": [
                "APILOGIN",
                "<<API User Id>>",
                "<<API User Password, create hash using SHA256, encrypt using
               pre-shared RSA public key, base-64 encoded>>"
            ],
            "UserType": "APIUSER",
            "AuthenticationType": "AUTH_API"
        }
    },
    "body": {
        "AdditionalInfo": {
            "EntityCode": "<<Consumer entity code, plain text>>",
            "IV": "<<Create 16-byte IV parameter, Convert to String, encrypt using
           pre-shared RSA public key, base-64 encoded>>"
        },
```

```
        "SessionKey": "<<Unique AES256 key, encrypt using
        pre-shared RSA public key, base-64 encoded >>",
        "RequestPayload": {
            "securityInterestDetails": {
                "securityInterest": {
                    "securityInterestId": "401XXXXXXXX9",
                    "satisfactionDate": "2023-04-10",
                    "satisfactionReason": "Loan Repaid",
                    "satisfactionReasonOtherDesc": ""
                },
                "transaction": {
                    "omissionReasonCategory": "",
                    "omissionReason": "",
                    "processId": 4,
                    "transactionMode": "A"
                }
            },

            "RequestHash": "MIIGbwYJKoZIhvcNAQcCoIIGYDCCBlwCAQExCzAJBg /…/
QlmUoW9+f/+JVQkw=="
        }
    }
}
```


**Response:**


```
{
    "header": {
        "transactionid": "jxhiw01682493717871119",
        "status": "success"
    },
    "body": {
        "APIResponse": {
            "transactionType": "Security Interest",
            "transactionSubType": "Registered Mortgage",
            "transactionTypeId": 8,
            "processId": 4,
            "processName": "Satisfaction",
            "responseTimestamp": "2023-04-26 12:52:03.677",
            "transationStatus": "C",
            "transactionSubTypeId": 18,
            "responseMessage": "Successfully Satisfied",
            "transactionId": 200XXXXXXXX8,
            "responseCode": "SUCCESS"
        }
    }
}
```

- **For Satisfation Reason: Others**

**Request**:


```
{
    "header": {
        "authinfo": {
            "LoginParams": [
                "APILOGIN",
                "<<API User Id>>",
                "<<API User Password, create hash using SHA256, encrypt
               using pre-shared RSA public key, base-64 encoded>>"
            ],
            "UserType": "APIUSER",
            "AuthenticationType": "AUTH_API"
        }
    },
    "body": {
        "AdditionalInfo": {
            "EntityCode": "<<Consumer entity code, plain text>>",
            "IV": "<<Create 16-byte IV parameter, Convert to String, encrypt
           using pre-shared RSA public key, base-64 encoded>>"
        },
        "SessionKey": "<<Unique AES256 key, encrypt using pre-shared RSA
       public key, base-64 encoded >>",
        "RequestPayload": {
            "securityInterestDetails": {
                "securityInterest": {
                    "securityInterestId": "401XXXXXXXX0",
                    "satisfactionDate": "2023-04-10",
                    "satisfactionReason": "Others",
                    "satisfactionReasonOtherDesc": "Others reason"
                },
                "transaction": {
                    "omissionReasonCategory": "",
                    "omissionReason": "",
                    "processId": 4,
                    "transactionMode": "A"
                }
            },
            "RequestHash": "MIIGbwYJKoZIhvcNAQcCoExCzAJBg /…/ QlmUoW9+f/+JVQkw=="
        }
    }
}
```


**Response:**


```
{
    "header": {
        "transactionid": "ks2qq01682495191438119",
        "status": "success"
```

```
    },
    "body": {
        "APIResponse": {
            "transactionSubType": "Registered Mortgage",
            "transactionTypeId": 8,
            "processId": 4,
            "processName": "Satisfaction",
            "responseTimestamp": "2023-04-26 13:16:35.92",
            "transationStatus": "C",
            "transactionSubTypeId": 18,
            "responseMessage": "Successfully Satisfied",
            "transacÄionType": "Security Interest",
            "transactionId": 200XXXXXXXX9,
            "responseCode": "SUCCESS"
        }
    }
}
```


- **For Satisfation Reason: Stay**
  - **Its applicable for all type of Attachment Order (AO) Satisfaction Reasons:**
    - Stay / Cancelled / Settled / Erroneous Registration

**Request:**


```
{
    "header": {
        "authinfo": {
            "LoginParams": [
                "APILOGIN",
                "<<API User Id>>",
                "<<API User Password, create hash using SHA256, encrypt using pre-
shared RSA public key, base-64 encoded>>"
            ],
            "UserType": "APIUSER",
            "AuthenticationType": "AUTH_API"
        }
    },
    "body": {
        "AdditionalInfo": {
            "EntityCode": "<<Consumer entity code, plain text>>",
            "IV": "<<Create 16-byte IV parameter, Convert to String, encrypt using
           pre-shared RSA public key, base-64 encoded>>"
```

```
        },
        "SessionKey": "<<Unique AES256 key, encrypt using pre-shared
        RSA public key, base-64 encoded >>",
        "RequestPayload": {
            "securityInterestDetails": {
                "securityInterest": {
                    "securityInterestId": "401XXXXXXXX8",
                    "satisfactionDate": "2023-04-10",
                    "satisfactionReason": "Stay",
                    "satisfactionReasonOtherDesc": ""
                },
                "transaction": {
                    "omissionReasonCategory": "",
                    "omissionReason": "",
                    "processId": 4,
                    "transactionMode": "A"
                }
            },
            "RequestHash": "MIIGbwYJKoZIhvNAQIIYDCCAQExCzAJBg /…/ QlmUoW9+f/+JVQkw=="
        }
    }
}
```


**Response:**


```
{
    "header": {
        "transactionid": "ee5g501682495573111119",
        "status": "success"
    },
    "body": {
        "APIResponse": {
            "transactionType": "Attachment Order",
            "transactionSubType": "Attachment Order",
            "transactionTypeId": 3,
            "processId": 4,
            "processName": "Satisfaction",
            "responseTimestamp": "2023-04-26 13:22:59.151",
            "transationStatus": "C",
            "transactionSubTypeId": 6,
            "responseMessage": "Successfully Satisfied",
            "transactionId": 200XXXXXXXX0,
            "responseCode": "SUCCESS"
        }
    }
}
```

- **For Omission Reason Category: Delay**
  - **It's applicable for type Satisfaction Reasons.**
    - If Satisfaction Date is before Security Interest Creation Date and before **30** days of Current Date, then its case of – **Delay**.

**Request:**


```
{
    "header": {
        "authinfo": {
            "LoginParams": [
                "APILOGIN",
                "<<API User Id>>",
                "<<API User Password, create hash using SHA256, encrypt using pre-
shared RSA public key, base-64 encoded>>"
            ],
            "UserType": "APIUSER",
            "AuthenticationType": "AUTH_API"
        }
    },
    "body": {
        "AdditionalInfo": {
            "EntityCode": "<<Consumer entity code, plain text>>",
            "IV": "<<Create 16-byte IV parameter, Convert to String, encrypt using
           pre-shared RSA public key, base-64 encoded>>"
        },
        "SessionKey": "<<Unique AES256 key, encrypt using pre-shared
        RSA public key, base-64 encoded >>",
        "RequestPayload": {
            "securityInterestDetails": {
                "securityInterest": {
                    "securityInterestId": "401XXXXXXXX0",
                    "satisfactionDate": "2023-03-20",
                    "satisfactionReason": "Loan Repaid",
                    "satisfactionReasonOtherDesc": ""
                },
                "transaction": {
                    "omissionReasonCategory": "Delay",
                    "omissionReason": "Delay reoson",
                    "processId": 4,
                    "transactionMode": "A"
                }
            },
            "RequestHash": "MIIGbwYJKoZIhvNAQIIYDCCAQExCzAJBg /…/ QlmUoW9+f/+JVQkw=="
        }
    }
}
```

**Response:**


```
{
    "header": {
        "transactionid": "k75gm01682496658298119",
        "status": "success"
    },
    "body": {
        "APIResponse": {
            "transactionType": "Security Interest",
            "transactionSubType": "Registered Mortgage",
            "transactionTypeId": 8,
            "processId": 4,
            "processName": "Satisfaction",
            "responseTimestamp": "2023-04-26 13:41:04.122",
            "transationStatus": "C",
            "transactionSubTypeId": 18,
            "responseMessage": "Successfully Satisfied",
            "transactionId": 200XXXXXXXX1,
            "responseCode": "SUCCESS"
        }
    }
}
```

# Annexure II: Server-Side Validations – Security Interest Satisfaction of Security Interest Details –

## For Security Interest -

Table 5: Field Validation for Security Interest

| SR NO | FIELD NAME | DATA TYPE | MANDATORY / OPTIONAL? | FIELD DESCRIPTION | FIELD VALIDATION |
|---|---|---|---|---|---|
| 1 | securityInterestId | Number | Yes | The security interest Id of the record being satisfied. The security interest must belong to your entity. The security interest must not be locked. The security interest must not already be satisfied. | Only fixed set of values allowed (as per master table / data set) |
| 2 | satisfactionDate | Date | Yes | The actual date of satisfaction of the security interest within the FI. | Format is YYYY-MM-DD. Future date is not allowed. Date should **not** be before of SI Creation date. |
| 3 | satisfactionReason | String | Yes | The Satisfaction Reason such as Loan Repaid, Others, Stay etc. | Only fixed set of values allowed. |
| 4 | satisfactionReason OtherDesc | String | Conditional | Satisfaction reason to be specified, In case, Satisfaction Reason is Others.<br>It should be null (“”) in case of not Satisfaction Reason is not Others. | Alphanumeric Characters; Special Character(s) Allowed: **Hyphen** / **Underscore** / **Dot** / **Comma** / **Forward Slash / Whitespace**; Consecutive special characters not allowed; Must not begin or end with a special character; Max Length:20; |

## For Transaction –

Table 6: Field Validation for Transaction

| SR NO | FIELD NAME | DATA TYPE | MANDATORY / OPTIONAL? | FIELD DESCRIPTION | FIELD VALIDATION |
|---|---|---|---|---|---|
| 1 | omissionReason Category | String | Conditional | Omission Reason Category should be Delay, If Satisfaction Date is 30 Days before of current date. | It should be null (**“”**) in case of **not** Delay<br>It should be constant “**Delay**” in case of delay. |
| 2 | omissionReason | String | Conditional | The reason for the delay, if applicable.<br>It should be null (**“”**) in case of **not** Delay | Alphanumeric Characters; Special Character(s) Allowed: **Hyphen / Underscore / Dot / Comma / Forward Slash / Whitespace**; Consecutive special characters not allowed; Must not begin or end with a special character; Max Length:20; |

# Annexure III: Exception – Error Code and Description **for Security Interest Satisfaction**

Table 7: Error Code and Description for Security Interest Satisfaction

| SR NO | ERROR CODE | ERROR MESSAGE | DESCRIPTION |
|---|---|---|---|
| 1 | 1002 | Action ID is invalid | URL/Service name is incorrect. |
| 2 | 4284 | Access denied | Auth type did not match. |
| 3 | 15000 | Internal Server Error Occurred. Please try after some time. | Exception occurred as Channel Key is invalid. |
| 4 | 70007 | Failure while processing API request | API Request is incorrect/ API Request structure is incorrect/ API Request is not encrypted properly. |
| 5 | 8726 | Unsuccessful Login! Please try to Login again. | API Login Id is invalid. |
| 6 | 21014 | Request Json didn't pass required validations | Server side validation error. Attributes/ request Json didn't pass required validations. |
| 7 | 41901 | Something went wrong while verifying your Digital Signature. Please try again. | No signature attached with the requesthash |
| 8 | 41902 | Digital Signature Verification Failed. | Digital Signature hash verification failed while verifying Security Interest digitally signed hash. |
| 9 | 41903 | Your Digital Signature has been revoked. | Your Digital Signature has been revoked. |
| 10 | 41904 | Your Digital Signature has expired. | User Digital Signature has expired. |
| 11 | 21002 | Security Interest Does Not Exist. | No Security Interest found. |
| 12 | 21006 | This Security Interest does not belong to your entity. | Security Interest Entity Code/ Security Interest Id mismatch. |

| | | | |
|---|---|---|---|
| 13 | 21004 | This Security Interest is already satisfied | Security Interest is already satisfied |
| 14 | 21005 | This Security Interest is locked | Security Interest is locked |
| 15 | 70001 | Failure while decrypting request payload | API Request payload is incorrect/ API Request payload is not encrypted properly. |
| 16 | 21010 | Entity has insufficient Balance | Entity has insufficient balance (In case of UAT testing, kindly connect with Technical Team CERSAI). |