
protocol: 10003

}

}

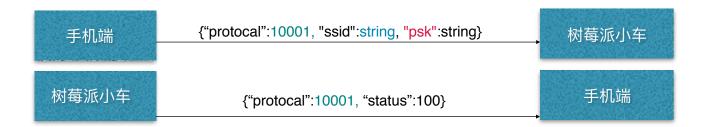

```
protocol: 20001
                     "protocal":30001,
                                                                                   "protocal":30001,
                     "data":
                                                                                   "data":
                        "device_id_id": string,
"action_type": int,
"speed": int
                                                                                      "device_id_id": string,
"action_type": int,
"speed": int
                     }
                                                                                   }
                  }
                                                                                }
                                                                 服务器
                                                                                                                                 小车
   手机端
                    "protocal":30001,
                                                                                  "protocal":30001,
                    "status":100 //ok
                                                                                  "status":100 //ok
                    "data":
                                                                                   "data":
                      "device_id_id": string,
"action_type": int,
"speed": int
                                                                                     "device_id_id": string,
"action_type": int,
"speed": int
```

}

}

protocol: 10003

```
手机端 {"protocal":10003} 小车或服务器

{
    "protocal":10003,
    "status":100
    "data":
    {
        "type": "raspi" || "server",
        "ip": string
    }
}

小车或服务器

手机端
```

protocol: 20001

