
protocol: 10001

}

}

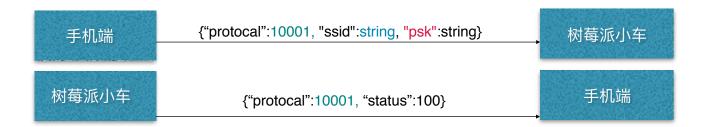

protocol: 20001 "protocal":30001, "protocal":30001, "data": "data": "device_id_id": string,
"action_type": int,
"speed": int "device_id_id": string,
"action_type": int,
"speed": int } } } } 服务器 小车 手机端 "protocal":30001, "protocal":30001, "status":100 //ok "status":100 //ok "data": "data": "device_id_id": string,
"action_type": int,
"speed": int "device_id_id": string,
"action_type": int,
"speed": int

}

}

protocol: 10003

```
手机端 {"protocal":10003} 小车或服务器

{
    "protocal":10003,
    "status":100
    "data":
    {
        "type": "raspi" || "server",
        "ip": string
    }
}

小车或服务器

手机端
```

protocol: 20001

