


side (+x) (axes in mm from the view origin)

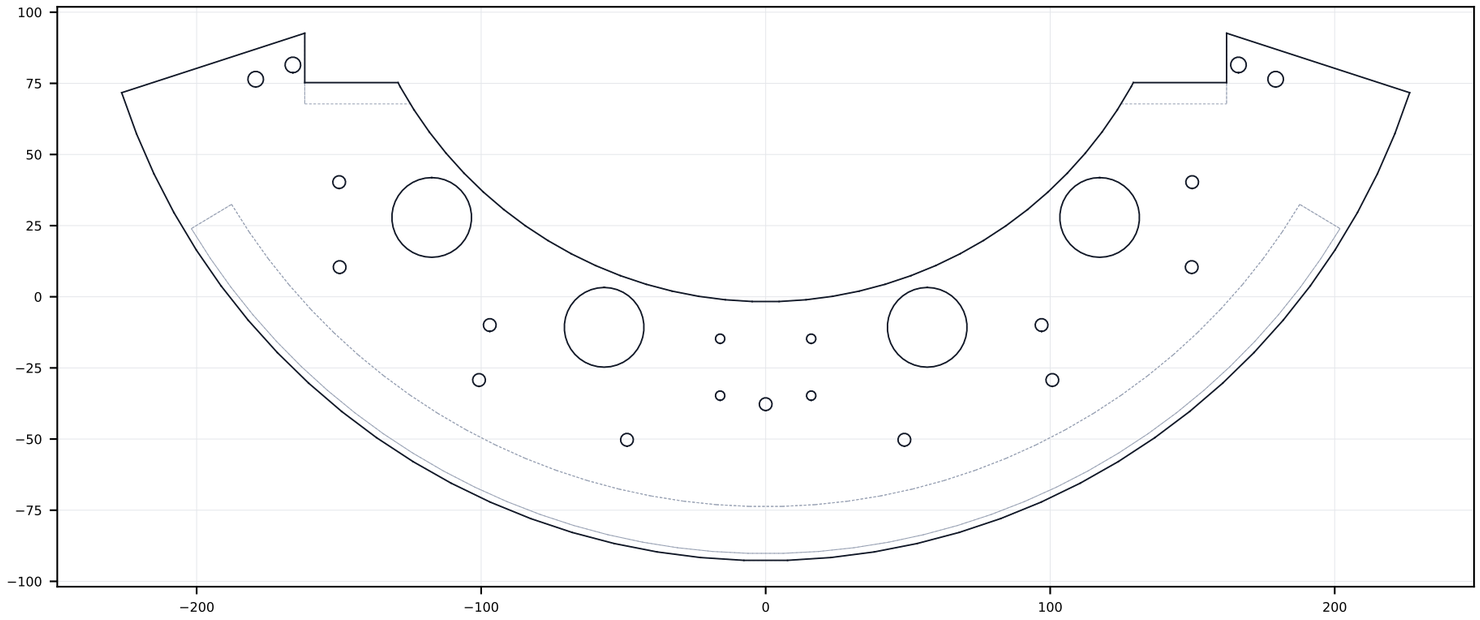


top (+z) (axes in mm from the view origin)



front (-y) (axes in mm from the view origin)



iso

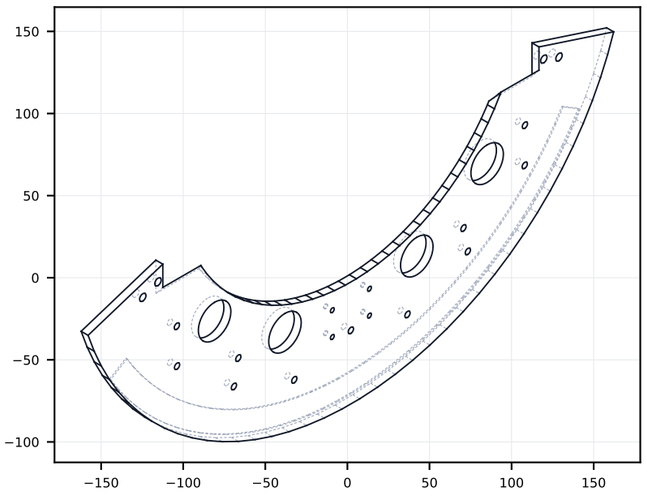

DRAWING arc_plate
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: 6061-T6 plate 6 mm
process: waterjet + CNC
finish:
mass: 623.8 g overall: 6.0 x 452.7 x 185.2 mm (x, y, z)
note:
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/arc_plate.step
view origin = bounding-box centre = robot (92.00, 0.00, -145.26)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M4 tapped 6.0 deep (drill 3.3)	9.00	-16.00	-34.74	-x
M4 tapped 6.0 deep (drill 3.3)	9.00	-16.00	-14.74	-x
M4 tapped 6.0 deep (drill 3.3)	9.00	16.00	-34.74	-x
M4 tapped 6.0 deep (drill 3.3)	9.00	16.00	-14.74	-x
d4.5 through	3.00	-149.91	40.29	-x
d4.5 through	3.00	-149.74	10.43	-x
d4.5 through	3.00	-100.75	-29.25	-x
d4.5 through	3.00	-96.97	-9.94	-x
d4.5 through	3.00	-48.75	-50.26	-x
d4.5 through	3.00	0.00	-37.74	-x
d4.5 through	3.00	48.75	-50.26	-x
d4.5 through	3.00	96.97	-9.94	-x
d4.5 through	3.00	100.75	-29.25	-x
d4.5 through	3.00	149.74	10.43	-x
d4.5 through	3.00	149.91	40.29	-x
d5.5 through	3.00	-179.25	76.45	-x
d5.5 through	3.00	-166.18	81.47	-x
d5.5 through	3.00	166.18	81.47	-x
d5.5 through	3.00	179.25	76.45	-x