Security Review Report NM-0412 Summon



(Feb 6, 2025)



Contents

| 1 | Executive Summary | 2 | | | | | | |
|---|---|---|--|--|--|--|--|--|
| 2 | Audited Files | | | | | | | |
| 3 | Summary of Issues | 3 | | | | | | |
| 1 | System Overview 4.1 Actors | 4 | | | | | | |
| 5 | Risk Rating Methodology | 5 | | | | | | |
| 6 | Issues 6.0.1 [Medium] The removeFeeRecipient() function doesn't remove recipient from feeRecipientAddresses 6.0.2 [Best Practice] Unused variable totalPercentage | | | | | | | |
| 7 | Documentation Evaluation | 7 | | | | | | |
| 3 | Test Suite Evaluation 8.1 Compilation Output 8.2 Tests Output | 8 | | | | | | |
| a | About Nethermind | c | | | | | | |



1 Executive Summary

This document outlines the security review conducted by Nethermind Security for Summon. The audit focused on the new split payment functionality of the PaymentRouterNative smart contract. The multisig wallet functionality was removed in favor of direct fee recipient management. Additionally, funds are now sent to the admin caller instead of the multisig for emergency withdrawals.

The audited code comprises 273 lines of code written in the Solidity language. The audit focuses on the new split payment functionality for the PaymentRouterNative smart contract.

The audit was performed using (a) manual analysis of the codebase, (b) automated analysis tools, and (c) creation of test cases. Along this document, we report two points of attention, all of which are classified as Medium and Best Practice. The issues are summarized in Fig. 1.

This document is organized as follows. Section 2 presents the files in the scope. Section 3 summarizes the issues. Section 4 presents the system overview. Section 5 discusses the risk rating methodology. Section 6 details the issues. Section 7 discusses the documentation provided by the client for this audit. Section 8 presents the test suite evaluation. Section 9 concludes the document.

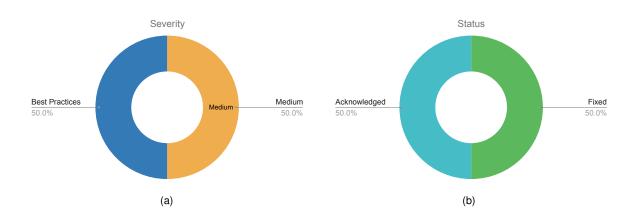


Fig. 1: Distribution of issues: Critical (0), High (0), Medium (1), Low (0), Undetermined (0), Informational (0), Best Practices (1).

Distribution of status: Fixed (1), Acknowledged (1), Mitigated (0), Unresolved (0)

Summary of the Audit

| Audit Type | Security Review |
|---------------------------------|--|
| Initial Report | January 31, 2025 |
| Final Report | February 6, 2025 |
| Repository | contracts-monorepo |
| Commit | 9f9a1ca733e10550a380d9860e3cf04f1659cc7a |
| Final Commit | 9c76d8a476013a238400d0121d88c5a498d5c747 |
| Documentation | PR description |
| Documentation Assessment | Medium |
| Test Suite Assessment | Medium |



2 Audited Files

| | Contract | LoC | Comments | Ratio | Blank | Total |
|---|--|-----|----------|-------|-------|-------|
| 1 | contracts/payments/PaymentRouterNative.sol | 273 | 153 | 56.0% | 51 | 477 |
| | Total | 273 | 153 | 56.0% | 51 | 477 |

3 Summary of Issues

| | Finding | | | | | | Severity | Update |
|---|--|----------|---------|--------|-----------|------|---------------|--------------|
| 1 | The removeFeeRecipient() feeRecipientAddresses | function | doesn't | remove | recipient | from | Medium | Fixed |
| 2 | Unused variable totalPercentage | | | | | | Best Practice | Acknowledged |



4 System Overview

4.1 Actors

The participants of PaymentRouterNative contract are outlined below.

- Admin: Address with the admin role can grant and revoke other roles. They can also withdraw the stuck funds from the contract.
- Dev Config: Address with Dev Config role can grant and revoke the whitelisted signer role. The role can also set and update Payment Config for specific payment IDs.
- Manager: Address with Manager role can pause and unpause the contracts. They can also set and update fee recipients.
- Whitelisted Signer: Whitelisted Sigher address is operated by the project's backend and signs the data for collectibles that users
 can later pay for.
- User: Users pay for in-game collectibles or get access tokens, which can be later claimed for rewards.

4.2 Payment Router Native

The PaymentRouterNative contract manages payments for in-game collectibles within the Summon ecosystem. It allows for configuring payment IDs, each with a configurable price and associated metadata URI. The contract supports role-based access control, enabling different levels of permissions for managing payment configurations and performing critical operations, such as updating prices and URIs, pausing/unpausing payment IDs, and handling the fee recipients. Authorized backend services sign messages to verify that a user can purchase specific in-game collectibles. Users can then call the pay(...) function to complete the transaction using the Game7 native tokens. Payments are securely routed to fee recipients. As a result, only authorized actions, validated by the signed messages, are executed within the system. The contract includes emergency withdrawal functionality to rescue any stuck funds from the contract.

4.3 Fee Recipients

The Fee Recipients receive their corresponding pro rata amount from the payment received in the pay(...) function by their respective assigned percentages. The setFeeRecipient(...) function is used to set a Fee Recipient and its percentage, whereas the removeFeeRecipient(...) function is used to remove a Fee Recipient. The pay(...) function will revert if the total percentage allocated to fee recipients does not precisely equal 100 percent.



5 Risk Rating Methodology

The risk rating methodology used by Nethermind Security follows the principles established by the OWASP Foundation. The severity of each finding is determined by two factors: **Likelihood** and **Impact**.

Likelihood measures how likely the finding is to be uncovered and exploited by an attacker. This factor will be one of the following values:

- a) **High**: The issue is trivial to exploit and has no specific conditions that need to be met;
- b) Medium: The issue is moderately complex and may have some conditions that need to be met;
- c) Low: The issue is very complex and requires very specific conditions to be met.

When defining the likelihood of a finding, other factors are also considered. These can include but are not limited to motive, opportunity, exploit accessibility, ease of discovery, and ease of exploit.

Impact is a measure of the damage that may be caused if an attacker exploits the finding. This factor will be one of the following values:

- a) High: The issue can cause significant damage, such as loss of funds or the protocol entering an unrecoverable state;
- b) **Medium**: The issue can cause moderate damage, such as impacts that only affect a small group of users or only a particular part of the protocol;
- c) **Low**: The issue can cause little to no damage, such as bugs that are easily recoverable or cause unexpected interactions that cause minor inconveniences.

When defining the impact of a finding, other factors are also considered. These can include but are not limited to Data/state integrity, loss of availability, financial loss, and reputation damage. After defining the likelihood and impact of an issue, the severity can be determined according to the table below.

| | | Severity Risk | | | | | |
|--------|--------------|---------------------|--------------|--------------|--|--|--|
| | High | Medium | High | Critical | | | |
| Impact | Medium | Low | Medium | High | | | |
| | Low | Info/Best Practices | Low | Medium | | | |
| | Undetermined | Undetermined | Undetermined | Undetermined | | | |
| | | Low | Medium | High | | | |
| | | Likelihood | | | | | |

To address issues that do not fit a High/Medium/Low severity, Nethermind Security also uses three more finding severities: Informational, Best Practices, and Undetermined.

- a) Informational findings do not pose any risk to the application, but they carry some information that the audit team intends to pass to the client formally:
- b) Best Practice findings are used when some piece of code does not conform with smart contract development best practices;
- c) Undetermined findings are used when we cannot predict the impact or likelihood of the issue.



6 Issues

6.0.1 [Medium] The removeFeeRecipient(...) function doesn't remove recipient from feeRecipientAddresses

File(s): contracts/payments/PaymentRouterNative.sol

Description: The setFeeRecipient(...) and batchSetFeeRecipients(...) functions push recipient to feeRecipientAddresses array if active field is false for that recipient. When the removeFeeRecipient(...) function is called, it simply sets the active field to false and percentage field to 0 but doesn't remove the recipient from feeRecipientAddresses array as seen below:

```
function removeFeeRecipient(address recipient) external onlyRole(MANAGER_ROLE) {
    // @audit should remove feeRecipient to avoid duplication and double counting of percentages.
    if (!feeRecipients[recipient].active) revert FeeRecipientDoesNotExist();

    feeRecipients[recipient].active = false;
    feeRecipients[recipient].percentage = 0;

    emit FeeRecipientRemoved(recipient);
}
```

Therefore, if a recipient was removed and added again, then feeRecipientAddresses would contain duplicate entries. As a result, getTotalFeePercentage(...) and getFeeRecipients(...) function would return duplicated entries.

Given the pay(...) function loops through feeRecipientAddresses array, it will transfer multiple times to the same recipient as it contains duplicated entries.

Recommendation(s): Consider removing the recipient from the feeRecipientAddresses.

Status: Fixed

Update from the client: 9c76d8a

6.0.2 [Best Practice] Unused variable totalPercentage

File(s): contracts/payments/PaymentRouterNative.sol

Description: The variable totalPercentage is not used anywhere in setFeeRecipient(...) function as seen below:

```
function setFeeRecipient(
   address recipient,
   uint256 percentage
) external onlyRole(MANAGER_ROLE) {
    // ...

   uint256 totalPercentage = getTotalFeePercentage();
   if (!feeRecipients[recipient].active) {
      totalPercentage += percentage;
   } else {
      totalPercentage = totalPercentage - feeRecipients[recipient].percentage + percentage;
   }

   // ...
}
```

Recommendation(s): Consider removing the variable totalPercentage or add a condition to make sure that it's not greater than HUNDRED_-PERCENT

Status: Unresolved

Update from the client: Acknowledged



7 Documentation Evaluation

Software documentation refers to the written or visual information that describes the functionality, architecture, design, and implementation of software. It provides a comprehensive overview of the software system and helps users, developers, and stakeholders understand how the software works, how to use it, and how to maintain it. Software documentation can take different forms, such as user manuals, system manuals, technical specifications, requirements documents, design documents, and code comments. Software documentation is critical in software development, enabling effective communication between developers, testers, users, and other stakeholders. It helps to ensure that everyone involved in the development process has a shared understanding of the software system and its functionality. Moreover, software documentation can improve software maintenance by providing a clear and complete understanding of the software system, making it easier for developers to maintain, modify, and update the software over time. Smart contracts can use various types of software documentation. Some of the most common types include:

- Technical whitepaper: A technical whitepaper is a comprehensive document describing the smart contract's design and technical details. It includes information about the purpose of the contract, its architecture, its components, and how they interact with each other;
- User manual: A user manual is a document that provides information about how to use the smart contract. It includes step-by-step
 instructions on how to perform various tasks and explains the different features and functionalities of the contract;
- Code documentation: Code documentation is a document that provides details about the code of the smart contract. It includes information about the functions, variables, and classes used in the code, as well as explanations of how they work;
- API documentation: API documentation is a document that provides information about the API (Application Programming Interface)
 of the smart contract. It includes details about the methods, parameters, and responses that can be used to interact with the
 contract:
- Testing documentation: Testing documentation is a document that provides information about how the smart contract was tested.
 It includes details about the test cases that were used, the results of the tests, and any issues that were identified during testing:
- Audit documentation: Audit documentation includes reports, notes, and other materials related to the security audit of the smart contract. This type of documentation is critical in ensuring that the smart contract is secure and free from vulnerabilities.

These types of documentation are essential for smart contract development and maintenance. They help ensure that the contract is properly designed, implemented, and tested, and they provide a reference for developers who need to modify or maintain the contract in the future.

Remarks on Summon's Documentation

The documentation for Summon's smart contracts was provided via the PR description. While the Summon team offered the Nethermind Security auditors the necessary background context to comprehend the contracts' functionality, readers lacking this context may find the code significantly harder to understand. It is strongly recommended that NatSpec comments be included in the contracts to improve accessibility and clarity.



8 Test Suite Evaluation

8.1 Compilation Output

```
> pnpm compile

Generating typings for: 193 artifacts in dir: typechain-types for target: ethers-v6

Successfully generated 520 typings!

Compiled 183 Solidity files successfully (evm target: paris).
```

8.2 Tests Output

The audit scope was limited to the PaymentRouterNative.sol contract which was part of summon-contracts project. Therefore, the following test output is an extraction of tests output strictly related to the PaymentRouterNative contract and other test outputs are ignored.

```
> pnpm test
PaymentRouterNative
   Deployment
       Should deploy successfully
       Should set the correct roles
       Should revert when deploying with zero addresses
   Payment Configuration
       Should set payment config correctly
       Should revert when setting zero price
   URI Management
       Should update URI correctly
       Should revert when updating URI for invalid payment ID
   Payment Operations
       Should accept and forward payment correctly to recipes
       Should revert payment when paused
       Should revert payment with incorrect amount
   Admin Functions
       Should withdraw stuck funds
   Role-Based Access Control
       Should revert when non-admin tries to withdraw
       Should revert when trying to withdraw with no funds
       Should revert when non-manager tries to pause
       Should revert when non-dev tries to set config
   Fee Recipient Management
       Should set and get fee recipient correctly
       Should update existing fee recipient percentage
       Should remove fee recipient correctly
       Should get all active fee recipients correctly
       Should batch set fee recipients correctly
      Error cases
        Should revert when setting zero address as recipient
         Should revert when setting percentage over 100%
         Should revert when removing non-existent recipient
         Should revert when batch setting with mismatched arrays
         Should revert when batch total exceeds 100%
```

8.3 Automated Tools

8.3.1 AuditAgent

All the relevant issues raised by the AuditAgent have been incorporated into this report. The AuditAgent is an Al-powered smart contract auditing tool that analyses code, detects vulnerabilities, and provides actionable fixes. It accelerates the security analysis process, complementing human expertise with advanced Al models to deliver efficient and comprehensive smart contract audits. Available at https://app.auditagent.nethermind.io.



9 About Nethermind

Nethermind is a Blockchain Research and Software Engineering company. Our work touches every part of the web3 ecosystem - from layer 1 and layer 2 engineering, cryptography research, and security to application-layer protocol development. We offer strategic support to our institutional and enterprise partners across the blockchain, digital assets, and DeFi sectors, guiding them through all stages of the research and development process, from initial concepts to successful implementation.

We offer security audits of projects built on EVM-compatible chains and Starknet. We are active builders of the Starknet ecosystem, delivering a node implementation, a block explorer, a Solidity-to-Cairo transpiler, and formal verification tooling. Nethermind also provides strategic support to our institutional and enterprise partners in blockchain, digital assets, and decentralized finance (DeFi). In the next paragraphs, we introduce the company in more detail.

Blockchain Security: At Nethermind, we believe security is vital to the health and longevity of the entire Web3 ecosystem. We provide security services related to Smart Contract Audits, Formal Verification, and Real-Time Monitoring. Our Security Team comprises blockchain security experts in each field, often collaborating to produce comprehensive and robust security solutions. The team has a strong academic background, can apply state-of-the-art techniques, and is experienced in analyzing cutting-edge Solidity and Cairo smart contracts, such as ArgentX and StarkGate (the bridge connecting Ethereum and StarkNet). Most team members hold a Ph.D. degree and actively participate in the research community, accounting for 240+ articles published and 1,450+ citations in Google Scholar. The security team adopts customer-oriented and interactive processes where clients are involved in all stages of the work.

Blockchain Core Development: Our core engineering team, consisting of over 20 developers, maintains, improves, and upgrades our flagship product - the Nethermind Ethereum Execution Client. The client has been successfully operating for several years, supporting both the Ethereum Mainnet and its testnets, and now accounts for nearly a quarter of all synced Mainnet nodes. Our unwavering commitment to Ethereum's growth and stability extends to sidechains and layer 2 solutions. Notably, we were the sole execution layer client to facilitate Gnosis Chain's Merge, transitioning from Aura to Proof of Stake (PoS), and we are actively developing a full-node client to bolster Starknet's decentralization efforts. Our core team equips partners with tools for seamless node set-up, using generated docker-compose scripts tailored to their chosen execution client and preferred configurations for various network types.

DevOps and Infrastructure Management: Our infrastructure team ensures our partners' systems operate securely, reliably, and efficiently. We provide infrastructure design, deployment, monitoring, maintenance, and troubleshooting support, allowing you to focus on your core business operations. Boasting extensive expertise in Blockchain as a Service, private blockchain implementations, and node management, our infrastructure and DevOps engineers are proficient with major cloud solution providers and can host applications inhouse or on clients' premises. Our global in-house SRE teams offer 24/7 monitoring and alerts for both infrastructure and application levels. We manage over 5,000 public and private validators and maintain nodes on major public blockchains such as Polygon, Gnosis, Solana, Cosmos, Near, Avalanche, Polkadot, Aptos, and StarkWare L2. Sedge is an open-source tool developed by our infrastructure experts, designed to simplify the complex process of setting up a proof-of-stake (PoS) network or chain validator. Sedge generates docker-compose scripts for the entire validator set-up based on the chosen client, making the process easier and quicker while following best practices to avoid downtime and being slashed.

Cryptography Research: At Nethermind, our Cryptography Research team is dedicated to continuous internal research while fostering close collaboration with external partners. The team has expertise across a wide range of domains, including cryptography protocols, consensus design, decentralized identity, verifiable credentials, Sybil resistance, oracles, and credentials, distributed validator technology (DVT), and Zero-knowledge proofs. This diverse skill set, combined with strong collaboration between our engineering teams, enables us to deliver cutting-edge solutions to our partners and clients.

Smart Contract Development & DeFi Research: Our smart contract development and DeFi research team comprises 40+ world-class engineers who collaborate closely with partners to identify needs and work on value-adding projects. The team specializes in Solidity and Cairo development, architecture design, and DeFi solutions, including DEXs, AMMs, structured products, derivatives, and money market protocols, as well as ERC20, 721, and 1155 token design. Our research and data analytics focuses on three key areas: technical due diligence, market research, and DeFi research. Utilizing a data-driven approach, we offer in-depth insights and outlooks on various industry themes.

Our suite of L2 tooling: Warp is Starknet's approach to EVM compatibility. It allows developers to take their Solidity smart contracts and transpile them to Cairo, Starknet's smart contract language. In the short time since its inception, the project has accomplished many achievements, including successfully transpiling Uniswap v3 onto Starknet using Warp.

- Voyager is a user-friendly Starknet block explorer that offers comprehensive insights into the Starknet network. With its intuitive interface and powerful features, Voyager allows users to easily search for and examine transactions, addresses, and contract details. As an essential tool for navigating the Starknet ecosystem, Voyager is the go-to solution for users seeking in-depth information and analysis;
- Horus is an open-source formal verification tool for StarkNet smart contracts. It simplifies the process of formally verifying Starknet smart contracts, allowing developers to express various assertions about the behavior of their code using a simple assertion language;
- Juno is a full-node client implementation for Starknet, drawing on the expertise gained from developing the Nethermind Client. Written in Golang and open-sourced from the outset, Juno verifies the validity of the data received from Starknet by comparing it to proofs retrieved from Ethereum, thus maintaining the integrity and security of the entire ecosystem.

Learn more about us at nethermind.io.



General Advisory to Clients

As auditors, we recommend that any changes or updates made to the audited codebase undergo a re-audit or security review to address potential vulnerabilities or risks introduced by the modifications. By conducting a re-audit or security review of the modified codebase, you can significantly enhance the overall security of your system and reduce the likelihood of exploitation. However, we do not possess the authority or right to impose obligations or restrictions on our clients regarding codebase updates, modifications, or subsequent audits. Accordingly, the decision to seek a re-audit or security review lies solely with you.

Disclaimer

This report is based on the scope of materials and documentation provided by you to Nethermind in order that Nethermind could conduct the security review outlined in 1. Executive Summary and 2. Audited Files. The results set out in this report may not be complete nor inclusive of all vulnerabilities. Nethermind has provided the review and this report on an as-is, where-is, and as-available basis. You agree that your access and/or use, including but not limited to any associated services, products, protocols, platforms, content, and materials, will be at your sole risk. Blockchain technology remains under development and is subject to unknown risks and flaws. The review does not extend to the compiler layer, or any other areas beyond the programming language, or other programming aspects that could present security risks. This report does not indicate the endorsement of any particular project or team, nor quarantee its security. No third party should rely on this report in any way, including for the purpose of making any decisions to buy or sell a product, service or any other asset. To the fullest extent permitted by law, Nethermind disclaims any liability in connection with this report, its content, and any related services and products and your use thereof, including, without limitation, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement. Nethermind does not warrant, endorse, guarantee, or assume responsibility for any product or service advertised or offered by a third party through the product, any open source or third-party software, code, libraries, materials, or information linked to, called by, referenced by or accessible through the report, its content, and the related services and products, any hyperlinked websites, any websites or mobile applications appearing on any advertising, and Nethermind will not be a party to or in any way be responsible for monitoring any transaction between you and any third-party providers of products or services. As with the purchase or use of a product or service through any medium or in any environment, you should use your best judgment and exercise caution where appropriate. FOR AVOIDANCE OF DOUBT, THE REPORT, ITS CONTENT, ACCESS, AND/OR USAGE THEREOF, INCLUDING ANY ASSOCIATED SERVICES OR MATERIALS, SHALL NOT BE CONSIDERED OR RELIED UPON AS ANY FORM OF FINANCIAL, INVESTMENT, TAX, LEGAL, REGULATORY, OR OTHER ADVICE.