

- > Getting started
- > Customize
- > Layout
- > Content
- > Forms
- > Components
- > Helpers
- ✓ Utilities
  - API
  - Background
  - Borders
  - Colors
  - Display
  - Flex

# Position

[View on GitHub](#)

Use these shorthand utilities for quickly configuring the position of an element.



Align on scope and communicate release status clearly with Tara AI. Get started for free today. ads via Carbon

## On this page

- Position values
- Arrange elements
- Center elements
- Examples
- Sass
  - Maps
  - Utilities API

## Position values

Quick positioning classes are available, though they are not responsive.

```
<div class="position-static">...</div>
<div class="position-relative">...</div>
<div class="position-absolute">...</div>
<div class="position-fixed">...</div>
<div class="position-sticky">...</div>
```

[Copy](#)

## Arrange elements

Arrange elements easily with the edge positioning utilities. The format is `{property}-{position}`.


Where *property* is one of:

- `top` - for the vertical `top` position
- `start` - for the horizontal `left` position (in LTR)
- `bottom` - for the vertical `bottom` position
- `end` - for the horizontal `right` position (in LTR)

Where *position* is one of:

- `0` - for `0` edge position
- `50` - for `50%` edge position
- `100` - for `100%` edge position

(You can add more position values by adding entries to the `$position-values` Sass map variable.)

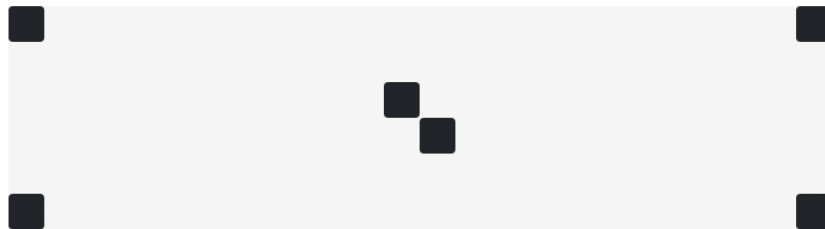

```
<div class="position-relative">
  <div class="position-absolute top-0 start-0"></div>
  <div class="position-absolute top-0 end-0"></div>
  <div class="position-absolute top-50 start-50"></div>
  <div class="position-absolute bottom-50 end-50"></div>
  <div class="position-absolute bottom-0 start-0"></div>
  <div class="position-absolute bottom-0 end-0"></div>
</div>
```

[Copy](#)

## Center elements

In addition, you can also center the elements with the transform utility class `.translate-middle`.

This class applies the transformations `translateX(-50%)` and `translateY(-50%)` to the element which, in combination with the edge positioning utilities, allows you to absolute center an element.

```
<div class="position-relative">
  <div class="position-absolute top-0 start-0 translate-middle"></div>
  <div class="position-absolute top-0 start-50 translate-middle"></div>
  <div class="position-absolute top-0 start-100 translate-middle"></div>
  <div class="position-absolute top-50 start-0 translate-middle"></div>
  <div class="position-absolute top-50 start-50 translate-middle"></div>
  <div class="position-absolute top-50 start-100 translate-middle"></div>
  <div class="position-absolute top-100 start-0 translate-middle"></div>
  <div class="position-absolute top-100 start-50 translate-middle"></div>
  <div class="position-absolute top-100 start-100 translate-middle"></div>
</div>
```

Copy

By adding `.translate-middle-x` or `.translate-middle-y` classes, elements can be positioned only in horizontal or vertical direction.

```
<div class="position-relative">
  <div class="position-absolute top-0 start-0"></div>
  <div class="position-absolute top-0 start-50 translate-middle-x"></div>
  <div class="position-absolute top-0 end-0"></div>
  <div class="position-absolute top-50 start-0 translate-middle-y"></div>
  <div class="position-absolute top-50 start-50 translate-middle"></div>
  <div class="position-absolute top-50 end-0 translate-middle-y"></div>
  <div class="position-absolute bottom-0 start-0"></div>
  <div class="position-absolute bottom-0 start-50 translate-middle-x"></div>
  <div class="position-absolute bottom-0 end-0"></div>
</div>
```

Copy

## Examples

Here are some real life examples of these classes:

+99

Mails

Marker

Alerts

```
<button type="button" class="btn btn-primary position-relative">
  Mails <span class="position-absolute top-0 start-100 translate-middle badge rounded-pill bg-secondary">
</button>

<button type="button" class="btn btn-dark position-relative">
  Marker <svg width="1em" height="1em" viewBox="0 0 16 16" class="position-absolute top-100 start-50 t
</button>

<button type="button" class="btn btn-primary position-relative">
```

Copy

```
Alerts <span class="position-absolute top-0 start-100 translate-middle badge border border-light rounded-pill text-dark">
</button>
```

You can use these classes with existing components to create new ones. Remember that you can extend its functionality by adding entries to the `$position-values` variable.



```
<div class="position-relative m-4">
  <div class="progress" style="height: 1px;">
    <div class="progress-bar" role="progressbar" style="width: 50%; background-color: #17a2b8;" aria-valuenow="50" aria-valuemin="0" aria-valuemax="100">
    </div>
  </div>
  <button type="button" class="position-absolute top-0 start-0 translate-middle btn btn-sm btn-primary">1</button>
  <button type="button" class="position-absolute top-0 start-50 translate-middle btn btn-sm btn-primary">2</button>
  <button type="button" class="position-absolute top-0 start-100 translate-middle btn btn-sm btn-secondary">3</button>
</div>
```

## Sass

### Maps


Default position utility values are declared in a Sass map, then used to generate our utilities.

```
$position-values: (
  0: 0,
  50: 50%,
  100: 100%
);
```

### Utilities API

Position utilities are declared in our utilities API in `scss/_utilities.scss`. [Learn how to use the utilities API.](#)

```
"position": (
  property: position,
  values: static relative absolute fixed sticky
),
"top": (
  property: top,
  values: $position-values
),
"bottom": (
  property: bottom,
  values: $position-values
),
"start": (
  property: left,
  class: start,
  values: $position-values
),
"end": (
  property: right,
  class: end,
  values: $position-values
),
"translate-middle": (
  property: transform,
  class: translate-middle,
  values: (
    null: translate(-50%, -50%),
    x: translateX(-50%),
    y: translateY(-50%),
  )
),
```



Designed and built with all the love in the world by the [Bootstrap team](#) with the help of our contributors.

Code licensed MIT, docs CC BY 3.0.

Currently v5.0.2.

## Links

[Home](#)

[Docs](#)

[Examples](#)

[Themes](#)

[Blog](#)

## Guides

[Getting started](#)

[Starter template](#)

[Webpack](#)

[Parcel](#)

## Projects

[Bootstrap 5](#)

[Bootstrap 4](#)

[Icons](#)

[RFS](#)

[npm starter](#)

## Community

[Issues](#)

[Discussions](#)

[Corporate sponsors](#)

[Open Collective](#)

[Slack](#)

[Stack Overflow](#)