

> Getting started

> Customize

> Layout

> Content

> Forms

> Components

> Helpers

> Utilities

API

Background

Borders

Colors


Display

Flex

Text

View on GitHub

Documentation and examples for common text utilities to control alignment, wrapping, weight, and more.

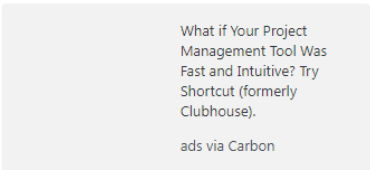

Text alignment

Easily realign text to components with text alignment classes. For start, end, and center alignment, responsive classes are available that use the same viewport width breakpoints as the grid system.

Start aligned text on all viewport sizes.

Center aligned text on all viewport sizes.

End aligned text on all viewport sizes.

Start aligned text on viewports sized SM (small) or wider.

Start aligned text on viewports sized MD (medium) or wider.

Start aligned text on viewports sized LG (large) or wider.

Start aligned text on viewports sized XL (extra-large) or wider.

```
<p class="text-start">Start aligned text on all viewport sizes.</p>
<p class="text-center">Center aligned text on all viewport sizes.</p>
<p class="text-end">End aligned text on all viewport sizes.</p>

<p class="text-sm-start">Start aligned text on viewports sized SM (small) or wider.</p>
<p class="text-md-start">Start aligned text on viewports sized MD (medium) or wider.</p>
<p class="text-lg-start">Start aligned text on viewports sized LG (large) or wider.</p>
<p class="text-xl-start">Start aligned text on viewports sized XL (extra-large) or wider.</p>
```

Note that we don't provide utility classes for justified text. While, aesthetically, justified text might look more appealing, it does make word-spacing more random and therefore harder to read.

Text wrapping and overflow

Wrap text with a `.text-wrap` class.

This text should wrap.

<div class="badge bg-primary text-wrap" style="width: 6rem;">
 This text should wrap.
</div>

Prevent text from wrapping with a `.text-nowrap` class.

This text should overflow the parent.

<div class="text-nowrap bd-highlight" style="width: 8rem;">

```
</div>
```

Word break

Prevent long strings of text from breaking your components' layout by using `.text-break` to set `word-wrap: break-word` and `word-break: break-word`. We use `word-wrap` instead of the more common `overflow-wrap` for wider browser support, and add the deprecated `word-break: break-word` to avoid issues with flex containers.

ကတ
ကတ

[illegible]

Note that [breaking words isn't possible in Arabic](#), which is the most used RTL language. Therefore `.text-break` is removed from our RTL compiled CSS.

Text transform

Transform text in components with text capitalization classes.

lowercased text.

UPPERCASED TEXT.

CapiTaliZed Text.

UPPERCASED TEXT.

CapiTaliZed Text.

CapiTaliZed Text.

```
<p class="text-lowercase">Lowercased text.</p>
<p class="text-uppercase">Uppercased text.</p>
<p class="text-capitalize">CapiTalized text.</p>
```

Note how `.text-capitalize` only changes the first letter of each word, leaving the case of any other letters unaffected.

Font size

Quickly change the `font-size` of text. While our heading classes (e.g., `.h1`–`.h6`) apply `font-size`, `font-weight`, and `line-height`, these utilities *only* apply `font-size`. Sizing for these utilities matches HTML's heading elements, so as the number increases, their size decreases.

.fs-1 text

.fs-2 text

.fs-3 text

.fs-4 text

.fs-5 text

.fs-6 text

```
.fs-2 text
```

```
.fs-3 text
```

```
.fs-4 text
```

```
.fs-5 text
```

```
.fs-6 text
```

```
.fs-3 text
```

```
.fs-4 text
```

```
.fs-5 text
```

```
.fs-6 text
```

```
.fs-4 text
.fs-5 text
.fs-6 text
```

```
.fs-5 text
.fs-6 text
```

```
.fs-6 text
```

```
<p class="fs-1">.fs-1 text</p>
<p class="fs-2">.fs-2 text</p>
<p class="fs-3">.fs-3 text</p>
<p class="fs-4">.fs-4 text</p>
<p class="fs-5">.fs-5 text</p>
<p class="fs-6">.fs-6 text</p>
```

Customize your available `font-sizes` by modifying the `$font-sizes` Sass map.

Font weight and italics

Quickly change the `font-weight` or `font-style` of text with these utilities. `font-style` utilities are abbreviated as `.fst-*` and `font-weight` utilities are abbreviated as `.fw-*`.

Bold text.

Bolder weight text (relative to the parent element).

Normal weight text.

Light weight text.

Lighter weight text (relative to the parent element).

Italic text.

Text with normal font style

```
<p class="fw-bold">Bold text.</p>
<p class="fw-bolder">Bolder weight text (relative to the parent element).</p>
<p class="fw-normal">Normal weight text.</p>
<p class="fw-light">Light weight text.</p>
<p class="fw-lighter">Lighter weight text (relative to the parent element).</p>
<p class="fst-italic">Italic text.</p>
<p class="fst-normal">Text with normal font style</p>
```

Copy

Line height

Change the line height with `.lh-*` utilities.

This is a long paragraph written to show how the line-height of an element is affected by our utilities. Classes are applied to the element itself or sometimes the parent element. These classes can be customized as needed with our utility API.

This is a long paragraph written to show how the line-height of an element is affected by our utilities. Classes are applied to the element itself or sometimes the parent element. These classes can be customized as needed with our utility API.

This is a long paragraph written to show how the line-height of an element is affected by our utilities. Classes are applied to the element itself or sometimes the parent element. These classes can be customized as needed with our utility API.

This is a long paragraph written to show how the line-height of an element is affected by our utilities. Classes are applied to the element itself or sometimes the parent element. These classes can be customized as needed with our utility API.

```
<p class="lh-1">This is a long paragraph written to show how the line-height of an element is affected</p>
<p class="lh-sm">This is a long paragraph written to show how the line-height of an element is affected</p>
<p class="lh-base">This is a long paragraph written to show how the line-height of an element is affected</p>
<p class="lh-lg">This is a long paragraph written to show how the line-height of an element is affected</p>
```

Copy

Monospace

Change a selection to our monospace font stack with `.font-monospace`.

This is in monospace

```
<p class="font-monospace">This is in monospace</p>
```

Copy

Reset color

Reset a text or link's color with `.text-reset`, so that it inherits the color from its parent.

Muted text with a [reset link](#).

```
<p class="text-muted">
  Muted text with a <a href="#" class="text-reset">reset link</a>.
</p>
```

[Copy](#)

Text decoration

Decorate text in components with text decoration classes.

This text has a line underneath it.

~~This text has a line going through it.~~

[This link has its text decoration removed](#)

```
<p class="text-decoration-underline">This text has a line underneath it.</p>
<p class="text-decoration-line-through">This text has a line going through it.</p>
<a href="#" class="text-decoration-none">This link has its text decoration removed</a>
```

[Copy](#)

Sass

Variables

```
// stylelint-disable value-keyword-case
$font-family-sans-serif: system-ui, -apple-system, "Segoe UI", Roboto, "Helvetica Neue", Arial, "I
$font-family-monospace: SFMono-Regular, Menlo, Monaco, Consolas, "Liberation Mono", "Courier New
// stylelint-enable value-keyword-case
$font-family-base: var(--#{$variable-prefix}font-sans-serif);
$font-family-code: var(--#{$variable-prefix}font-monospace);

// $font-size-root affects the value of `rem`, which is used for as well font sizes, paddings, and mar
// $font-size-base affects the font size of the body text
$font-size-root: null;
$font-size-base: 1rem; // Assumes the browser default, typically `16px`
$font-size-sm: $font-size-base * .875;
$font-size-lg: $font-size-base * 1.25;

$font-weight-lighter: lighter;
$font-weight-light: 300;
$font-weight-normal: 400;
$font-weight-bold: 700;
$font-weight-bolder: bolder;

$font-weight-base: $font-weight-normal;

$line-height-base: 1.5;
$line-height-sm: 1.25;
$line-height-lg: 2;

$h1-font-size: $font-size-base * 2.5;
$h2-font-size: $font-size-base * 2;
$h3-font-size: $font-size-base * 1.75;
$h4-font-size: $font-size-base * 1.5;
$h5-font-size: $font-size-base * 1.25;
$h6-font-size: $font-size-base;
```

[Copy](#)

Maps

Font-size utilities are generated from this map, in combination with our utilities API.

```
$font-sizes: (
  1: $h1-font-size,
  2: $h2-font-size,
  3: $h3-font-size,
  4: $h4-font-size,
  5: $h5-font-size,
  6: $h6-font-size
);
```

[Copy](#)

Utilities API

Font and text utilities are declared in our utilities API in `scss/_utilities.scss`. [Learn how to use the utilities API.](#)

```
"font-family": (  
  property: font-family,  
  class: font,  
  values: (monospace: var(--#{$variable-prefix}font-monospace))  
)  
,  
"font-size": (  
  rfs: true,  
  property: font-size,  
  class: fs,  
  values: $font-sizes  
)  
,  
"font-style": (  
  property: font-style,  
  class: fst,  
  values: italic normal  
)  
,  
"font-weight": (  
  property: font-weight,  
  class: fw,  
  values: (  
    light: $font-weight-light,  
    lighter: $font-weight-lighter,  
    normal: $font-weight-normal,  
    bold: $font-weight-bold,  
    bolder: $font-weight-bolder  
  )  
)  
,  
"line-height": (  
  property: line-height,  
  class: lh,  
  values: (  
    1: 1,  
    sm: $line-height-sm,  
    base: $line-height-base,  
    lg: $line-height-lg,  
  )  
)  
,  
"text-align": (  
  responsive: true,  
  property: text-align,  
  class: text,  
  values: (  
    start: left,  
    end: right,  
    center: center,  
  )  
)  
,  
"text-decoration": (  
  property: text-decoration,  
  values: none underline line-through  
)  
,  
"text-transform": (  
  property: text-transform,  
  class: text,  
  values: lowercase uppercase capitalize  
)  
,  
"white-space": (  
  property: white-space,  
  class: text,  
  values: (  
    wrap: normal,  
    nowrap: nowrap,  
  )  
)  
,  
"word-wrap": (  
  property: word-wrap word-break,  
  class: text,  
  values: (break: break-word),  
  rtl: false  
)  
,
```

[Copy](#)

Designed and built with all the love in the world by the [Bootstrap team](#) with the help of our contributors.

Code licensed MIT, docs CC BY 3.0.

Currently v5.0.2.

[Home](#)

[Docs](#)

[Examples](#)

[Themes](#)

[Blog](#)

[Getting started](#)

[Starter template](#)

[Webpack](#)

[Parcel](#)

[Bootstrap 5](#)

[Bootstrap 4](#)

[Icons](#)

[RFS](#)

[npm starter](#)

[Issues](#)

[Discussions](#)

[Corporate sponsors](#)

[Open Collective](#)

[Slack](#)

[Stack Overflow](#)