

Цель работы: научиться использовать основные команды работы с массивами и строками.

Выполнение заданий:

Задание 1

Создайте массив \$bmw с ячейками:

"model"

"speed"

"doors"

"year"

Заполните ячейки значениями: "X5", 120, 5, "2006"

Создайте массивы \$toyota и \$opel аналогичные массиву \$bmw.

Заполните массив \$toyota значениями: "Carina", 130, 4, "2007"

Заполните массив \$opel значениями: "Corsa", 140, 5, "2007"

Листинг:

```
<?php
$bmw = array(
    "model" => "X5",
    "speed" => 120,
    "doors" => 5,
    "year" => "2006"
);

$toyota = array(
    "model" => "Carina",
    "speed" => 130,
    "doors" => 4,
    "year" => "2007"
);

$opel = array(
    "model" => "Corsa",
    "speed" => 140,
    "doors" => 5,
    "year" => "2007"
);

foreach( $bmw as $key => $value ){
    echo $key."\t=>\t".$value."\n";
}
echo "\n";
foreach( $toyota as $key => $value ){
    echo $key."\t=>\t".$value."\n";
```

```

}

echo "\n";

foreach( $opel as $key => $value ){

    echo $key."\t=>\t".$value."\n";

}

?>

```

Результат:

The screenshot shows the onlinephp.io PHP Sandbox interface. The code editor on the left contains the following PHP code:

```

1 <?php
2 $bmw = array(
3     "model" => "X5",
4     "speed" => 120,
5     "doors" => 5,
6     "year" => "2006"
7 );
8
9 $toyota = array(
10    "model" => "Carina",
11    "speed" => 130,
12    "doors" => 4,
13    "year" => "2007"
14 );
15
16 $opel = array(
17    "model" => "Corsa",
18    "speed" => 140,
19    "doors" => 5,
20    "year" => "2007"
21 );
22
23 foreach( $bmw as $key => $value ){
24     echo $key."\t=>\t".$value."\n";
25 }
26 echo "\n";
27 foreach( $toyota as $key => $value ){
28     echo $key."\t=>\t".$value."\n";
29 }
30 echo "\n";
31 foreach( $opel as $key => $value ){
32     echo $key."\t=>\t".$value."\n";
33 }
34
35 ?>

```

The output panel on the right shows the result for PHP 8.2.1:

```

Result for 8.2.1:
Execution time: 0.000136s Mem: 389KB Max: 428KB

model => X5
speed => 120
doors => 5
year => 2006

model => Carina
speed => 130
doors => 4
year => 2007

model => Corsa
speed => 140
doors => 5
year => 2007

```

Задание 2

Выведите значения всех трёх массивов в виде: name - model - speed - doors -year, например: bmw - 120 - 5 - 2006

Листинг:

```

<?php

$bmw = array (

"model"=>"X5",

"speed"=>120,

"doors"=>5,

"year"=>"2006"

);

$toyota = array (

"model"=>"Carina",

"speed"=>130,

"doors"=>4,

```

```

"year"=>"2007"
);

$opel = array(
"model"=>"Corsa",
"speed"=>140,
"doors"=>5,
"year"=>"2007"
);

echo '<p>BMW - '.$bmw["model"].' - '.$bmw["speed"].' - '.$bmw["doors"].' - 
'.$bmw["year"].'</p>';
echo "\n";
echo '<p>Toyota - '.$toyota["model"].' - '.$toyota["speed"].' - '.$toyota["doors"].' - 
'.$toyota["year"].'</p>';
echo "\n";
echo '<p>Opel - '.$opel["model"].' - '.$opel["speed"].' - '.$opel["doors"].' - 
'.$opel["year"].'</p>';
?>

```

Результат:

The screenshot shows a PHP Sandbox window with the following code on the left and the output on the right.

```

1 <?php
2 $bmw = array(
3     "model"=>"X5",
4     "speed"=>120,
5     "doors"=>5,
6     "year"=>"2006"
7 );
8 $toyota = array(
9     "model"=>"Carina",
10    "speed"=>130,
11    "doors"=>4,
12    "year"=>"2007"
13 );
14 $opel = array(
15     "model"=>"Corsa",
16     "speed"=>140,
17     "doors"=>5,
18     "year"=>"2007"
19 );
20
21 echo '<p>BMW - '.$bmw["model"].' - '.$bmw["speed"].' - '.$bmw["doors"].' - '
22     '.$bmw["year"].'</p>';
23 echo "\n";
24 echo '<p>Toyota - '.$toyota["model"].' - '.$toyota["speed"].' - '.$toyota["doors"].' - '
25     '.$toyota["year"].'</p>';
26 echo "\n";
27 echo '<p>Opel - '.$opel["model"].' - '.$opel["speed"].' - '.$opel["doors"].' - '
28     '.$opel["year"].'</p>';
29 ?>

```

Result for 8.2.1: Execution time: 0.000234s Mem: 389KB Mac 429KB

```

BMW - X5 - 120 - 5 - 2006
Toyota - Carina - 130 - 4 - 2007
Opel - Corsa - 140 - 5 - 2007

```

Задание 3

Выполнить код по примеру

Листинг:

```

<?php
$str = 'Privet';

$first = $str[0];

```

```
echo $first . "\n";
```

```
$str = 'Privet';
```

```
$len = strlen($str);
```

```
echo $len . "\n";
```


```
$str = 'Privet';
```

```
$last = $str[strlen($str) - 1];
```

```
echo $last . "\n";
```

```
?>
```

Результат:

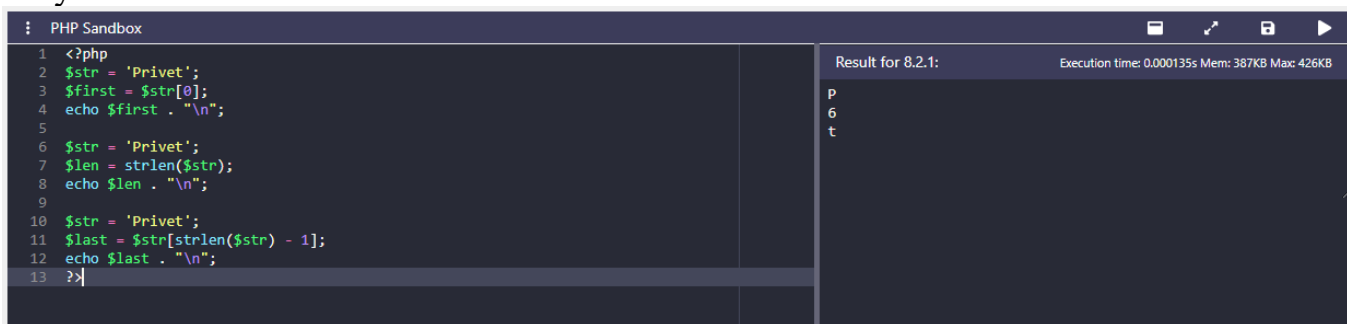

The screenshot shows a PHP Sandbox interface. The left pane contains the following PHP code:

```
1 <?php
2 $str = 'Privet';
3 $first = $str[0];
4 echo $first . "\n";
5
6 $str = 'Privet';
7 $len = strlen($str);
8 echo $len . "\n";
9
10 $str = 'Privet';
11 $last = $str[strlen($str) - 1];
12 echo $last . "\n";
13 ?>
```

The right pane displays the output of the code, which is the string "Privet" printed vertically. Above the output, it shows "Result for 8.2.1:" and "Execution time: 0.000135s Mem: 387KB Max: 426KB".