

Towards Reproducibility in Predictive Process Mining: SPICE — A Deep Learning Library

Oliver Stritzel ¹, Nick Hühnerbein ¹, Simon Rauch ¹, Itzel Zarate ¹, Lukas Fleischmann¹, Moike Buck¹, Attila Lischka ^{1,3}, and Christian Frey^{1,2}

¹Process Intelligence, Center for Applied Research on Supply Chain Services,
Fraunhofer IIS, Nuremberg, Germany

²Machine Learning Lab, University of Technology Nuremberg, Germany

³Electrical Engineering, Chalmers University of Technology, Gothenburg, Sweden

Abstract

In recent years, Predictive Process Mining (PPM) techniques based on artificial neural networks have evolved as a method for monitoring the future behavior of unfolding business processes and predicting Key Performance Indicators (KPIs). However, many PPM approaches often lack reproducibility, transparency in decision making, usability for incorporating novel datasets and benchmarking, making comparisons among different implementations very difficult. In this paper, we propose *SPICE* (Standardized Process Intelligence Comparison Engine), a Python framework that reimplements three popular, existing baseline deep-learning-based methods for PPM in PyTorch, while designing a common base framework with rigorous configurability to enable reproducible and robust comparison of past and future modelling approaches. We compare SPICE to original reported metrics and with fair metrics on 11 datasets.

1 Introduction

The rapid digitalization of business processes and advances in digital monitoring technologies have enabled organizations to systematically track real-world operational events through digital traces. The volume and velocity of captured process data has created a pressing need for meaningful analytical methods. Process Mining (PM) addresses this need by providing post-hoc analysis of event logs, while the sub-field of Predictive Process Mining (PPM) extends these capabilities to support proactive decision-making. By performing predictive tasks on ongoing process instances — such as suffix prediction, remaining time prediction, and outcome prediction — PPM enables organizations to anticipate critical Key Performance Indicators (KPIs) with foresight and intervene accordingly before process completion.

As process data can be defined as sequential by nature, unfolding over time, advances in the domain of Natural Language Processing (NLP) — especially neural network based architectures such as Long Short-Term Memory (LSTM) [12] and Transformer-based models [33] — appear as natural

fit and have inspired numerous publications in PPM [31, 6, 5, 24]. However, while advances in model architectures have been made in the domain, standardized and openly available real-world datasets still remain rare, and the research field of PPM has therefore been focussed on transferring promising methods from other areas of application to PPM use cases before creating a level playing field. Other domains, such as computer vision [18, 8, 17, 19] or NLP [20, 34], have created datasets with clear splits, enabling fair conditions for future research and continuous benchmarking. The most prominent PPM datasets, the BPI Challenges, have never introduced such predefined splits, leading to various contributions with different splitting criteria and, moreover, also diverging preprocessing and filtering strategies (e.g., using a filtered subset of a dataset while other authors use the original full one). This renders those contributions hardly reproducible and barely comparable with already published work.

This phenomenon is not specific to PPM but also appears in many other domains and is referred to as the reproducibility crisis [3, 16]. While others, such as Rama-Maneiro et al. [24], have already tried to reproduce PPM results, some of the original mistakes have been copied, thus also introducing experimental design flaws. Nevertheless, pioneering works [31, 6, 5] are still cited as benchmark results in recent PPM publications without correcting these deviations.

In this work, we aim to highlight these flaws. To address them, we introduce SPICE — *Standardized Process Intelligence Comparison Engine*, an open-source¹ Python library that mitigates three major pain-points in PPM:

1. Reimplementing prominent baseline models in a single library using PyTorch [22] for **Next Activity**, **Next Timestamp**, **Remaining Time** and **Suffix** Prediction.
2. Standardization of common reproducibility concerns such as data splitting, shuffling, pre-processing, and the removal of experimental design flaws to enable fair comparison across architectures and datasets.
3. High modularization to easily incorporate future methods and improve existing architectures.

The workflow of SPICE is visualized in Figure 1.

2 Definitions & Related Work

This section begins with a formal definition of PPM, establishing the prediction tasks of interest and their corresponding optimization formulations. We then review three deep learning architectures that have significantly advanced the field, highlighting their (then) novel contributions. Finally, we address common experimental design challenges, including data splitting, information leakage, and reproducibility issues, which critically undermine the reliability of (current) PPM research.

¹Source Code available at: <https://gitlab.cc-asp.fraunhofer.de/iis-scs-a-publications/spice>

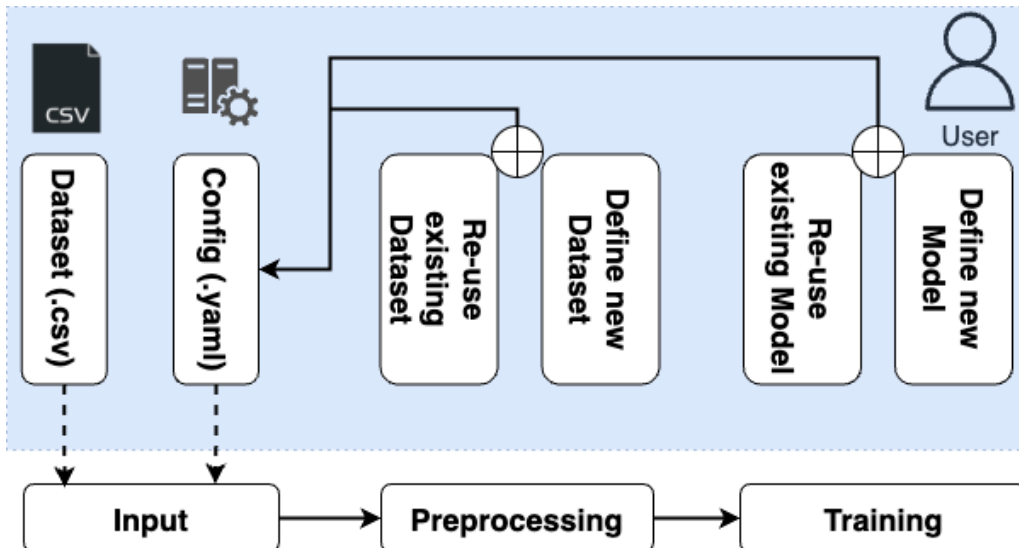


Figure 1: SPICE Workflow

2.1 Predictive Process Mining

Event logs form the foundation of both PM and PPM. These sequential datasets capture process executions and must, by definition [32], include three core elements: (1) a unique case identifier, (2) an activity, and (3) a timestamp for ordering events. Event logs often contain additional contextual information — such as resource assignments, machine states, or sensor data — yielding rich, multivariate datasets. Traditional PM emphasizes post-hoc analysis through process discovery, enhancement, and conformance checking [32]. PPM, however, leverages advances in machine learning to shift the focus towards predictively monitoring of ongoing processes.

Each event log can be defined, according to notation of Rama-Maneiro et al. [24], as a set of traces D with traces $\sigma \in D$, with each σ grouped by the case identifier and ordered by timestamp. Each trace can then be split by arbitrary timestamps into a prefix $hd_k(\sigma) = \langle e_{t_1}, \dots, e_{t_k} \rangle$, with e_{t_k} being events at position k at time t , and suffix $\widehat{hd_k(\sigma)} = \langle e_{t_{(k+1)}}, \dots, e_{t_{(i-1)}} \rangle$, with i as the trace length. The goal is to learn a function Ω that predicts process KPIs for those splits. Often not the whole prefix is used as the input for the function but only a sub-sequence existing of n events, which are mostly referred to as **n-grams** in this context, following a rolling window approach. See Figure 3 for a visualization of this split and the combination into n-grams. The prediction tasks are defined in the following.

Next Activity & Timestamp Prediction: In next activity and next timestamp prediction, only the first element of the suffix $\widehat{hd_k(\sigma)}$ is of interest. Let A_n and T_n denote the activity and timestamp of the next event e_n . The next activity prediction problem seeks parameters θ minimizing the expected negative log-likelihood from Eq. (1), with the next timestamp prediction optimizing for temporal differences in Eq. (2). Although it is termed next timestamp prediction, models are actually trained to predict the delta $\Delta t = T_n - T_{n-1}$ between subsequent events, where the delta is

added to the last known timestamp to retrieve the next timestamp, with $T_n = T_{n-1} + \Delta t$. This can also be done in a multistep prediction (MSP) approach.

$$\underset{\theta}{\operatorname{argmin}} \mathbb{E}_{\sigma \sim D} [-\log p(A_{k+1} \mid \operatorname{hd}_k(\sigma); \theta)] \quad (1) \quad \underset{\theta}{\operatorname{argmin}} \mathbb{E}_{\sigma \sim D} [-\log f(\widehat{\Delta T}_{k+1} \mid \operatorname{hd}_k(\sigma); \theta)], \quad (2)$$

where $\widehat{\Delta T}_{k+1} = T_{k+1} - T_k$.

Suffix Prediction: Beyond a single one- or multistep prediction, SPICE supports suffix predictions to generate full case continuations by recursively applying the model to its own predictions for next activity and next timestamp. Starting from the known prefix $\operatorname{hd}_k(\sigma)$, the predicted suffix $\langle \hat{e}_{k+1}, \hat{e}_{k+2}, \dots, \hat{e}_n \rangle$ is generated until an end-of-case token is reached

$$\hat{e}_{k+1} \sim p(e \mid \operatorname{hd}_k(\sigma); \theta), \dots, \hat{e}_i \sim p(e \mid \operatorname{hd}_k(\sigma) \oplus \langle \hat{e}_{k+1}, \dots, \hat{e}_{i-1} \rangle; \theta) \quad (3)$$

where $\oplus$ denotes sequence concatenation and $i > k + 1$.

Formally, an autoregressive suffix prediction can be expressed as

$$\hat{S} = \Omega_{SA}(\operatorname{hd}_k(\sigma)) = \langle \hat{A}_{k+1}, \hat{A}_{k+2}, \dots, \hat{A}_n \rangle, \quad (4)$$

where $\hat{A}_i = \arg \max_A p(A \mid \operatorname{hd}_{i-1}(\hat{\sigma}); \theta)$,

and $\hat{\sigma} = \operatorname{hd}_k(\sigma) \oplus \hat{S}$ is the concatenation of prefix and predicted suffix. It has to be mentioned here, that finding the suffix with the maximum (joint) probability is not the only way to generate suffixes. Often times sampling based procedures are implemented as well as described in section 3.

Beyond single-step predictions, we implement MSP variants that forecast multiple future events in fewer forward passes. MSP estimates the conditional distribution of the next m activities:

$$p(A_{k+1}, A_{k+2}, \dots, A_{k+m} \mid \operatorname{hd}_k(\sigma); \theta), \quad (5)$$

optimized by minimizing the joint negative log-likelihood:

$$\underset{\theta}{\operatorname{argmin}} \mathbb{E}_{\sigma \sim D} [-\log p(A_{k+1:k+m} \mid \operatorname{hd}_k(\sigma); \theta)]. \quad (6)$$

When m equals the suffix length, the entire suffix can be predicted in a single pass, reducing inference time and error propagation. However, MSP increases model complexity due to the larger output space and may reduce accuracy for longer horizons. Careful selection of m is crucial to balance efficiency and forecasting quality. The same approach applies to timestamp differences $f(\widehat{\Delta T}_{k+1}, \dots, \widehat{\Delta T}_{k+m} \mid \operatorname{hd}_k(\sigma); \theta)$.

Remaining Time Prediction: Remaining time prediction estimates the time until case completion given $\operatorname{hd}_k(\sigma)$. This can be done in two ways, by direct or autoregressive prediction. For *Direct prediction*, a model estimates the remaining time from $\operatorname{hd}_k(\sigma)$ directly, i.e., $\hat{R}_k = f(\operatorname{hd}_k(\sigma); \theta)$ where $\hat{R}_k = T_{|\sigma|} - T_k$ is the predicted remaining time until case completion at step k .

In the case of *Autoregressive prediction*, the model predicts temporal increments between consecutive events via individual next timestamp predictions $f(\widehat{\Delta T}_{k+1} \mid \operatorname{hd}_k(\sigma); \theta), \dots, f(\widehat{\Delta T}_{k+m} \mid$

$\text{hd}_{k+m-1}(\sigma; \theta)$ for the next single or m steps ahead. These increments are predicted iteratively, with each predicted times used to calculate the next increment. The remaining time $\hat{R}_k^{(m)}$ at step k is then computed as the sum of all predicted increments until the end of the case: $\hat{R}_k^{(m)} = \sum_{i=1}^m \widehat{\Delta T}_{k+i}$. This stepwise approach enables flexible forecasting horizons and allows the remaining time to be derived from the model’s predicted next event times. Generally speaking predicting remaining time directly is the preferred method as an iterative approach comes with other problems which are beyond the scope of this paper [26].

Outcome Prediction: Sometimes the quality or outcome O of a process can be measured, e.g., by having an end-of-line test at the end of a production process or by estimating customer satisfaction through questionnaires. The goal is then, for any given prefix, to make a prediction about the outcome $\hat{O} = \Omega_O(\text{hd}_k(\sigma))$, where $\hat{O} \in \{0, 1\}$ for binary outcomes (e.g. pass/fail) or $\hat{O} \in [\min(O), \max(O)]$ when continuous quality scores are available. This ultimately follows a binary classification or a regression task.

2.2 Deep Learning in PPM

These prediction tasks have motivated the adoption of deep learning approaches in PPM, with researchers drawing inspiration from NLP techniques due to the sequential nature of business process event logs. The application of deep learning techniques to PPM began with the pioneering work of Evermann et al. [9], who introduced a fundamental shift in the PPM modeling paradigm by applying LSTM networks directly to event sequences without requiring explicit process models. By drawing parallels between event logs and natural language, they employed dense embeddings and a two-layer LSTM architecture for next-event and time prediction, though their approach was constrained to categorical variables.

Extending this foundation, Tax et al. [31] introduced multi-task LSTM models that simultaneously predict next activity and times. Their approach combines one-hot encoding for activities with time-based feature enrichment, capturing temporal patterns such as work hours. This multi-task framework improved early-stage predictions and generalized successfully to full trace and remaining time predictions, although it exhibited scalability limitations with large event spaces.

Camargo et al. [6] advanced LSTM-based PPM by integrating embeddings with tailored network architectures and sophisticated preprocessing strategies. Through comprehensive experiments across nine event logs, they demonstrated improved suffix prediction capabilities, particularly when employing shared architectures and log-normalized time features. Their approach addressed the scalability challenges of large vocabularies while indicating strong potential for simulation applications.

Following the broader transformative impact of Transformer architectures across machine learning (ML) domains [15, 33], Bukhsh et al. [5] introduced a significant paradigm shift to PPM by replacing sequential LSTM-based processing with self-attention mechanisms that enable parallel computation over entire event sequences. This architectural departure addresses fundamental limitations of recurrent approaches by capturing long-range dependencies more effectively while eliminating the sequential bottleneck that constrains LSTM’s and RNN’s scalability. The attention-based framework reduces dependence on manual feature engineering and demonstrates enhanced adaptability across heterogeneous event logs, though this flexibility comes with trade-offs in model interpretability.

and computational overhead compared to simpler sequential approaches. In more recent research, Transformer-based architectures found multiple adopters applying them to PPM tasks [10, 11, 35].

We focus on these three approaches [31, 6, 5] due to (1) their high citation impact and being a de-facto benchmark approach, (2) the accessibility of their respective code base and (3) the fact that they represent key methodological advances in PPM: the introduction of multi-task learning paradigms, the optimization of LSTM architectures with enhanced preprocessing and embedding strategies, and the paradigm shift to attention-based architectures. In future versions of SPICE we aim at incorporating additional baseline models to provide broader coverage of the PPM landscape.

2.3 Experimental Design & Common Mistakes

Rigorous experimental design is essential for credible evaluation of all ML research. Poor design choices — such as biased dataset selection, inconsistent preprocessing, unfair hyperparameter tuning, or inappropriate metrics — can lead to misleading conclusions that overstate model performance or obscure genuine algorithmic contributions. A well-designed experiment ensures reproducibility, enables fair comparison between competing approaches, and provides reliable evidence of a method’s practical value. This requires careful consideration of dataset representativeness, evaluation protocols, baseline selection, and statistical validation to ensure that reported improvements reflect real advances rather than experimental artifacts. Rama-Maneiro et al. [24] have already conducted a comprehensive review which tried to reproduce results from multiple papers, also including approaches chosen in this paper. But while they fixed some of the experimental design flaws such as uneven data splits, they did not focus on outlining implementation changes such as fixing crucial errors, information leakage problems, or unfair preprocessing in the respective modelling, but rather focused on the comparison of metrics instead.

Data Splitting: Data splitting in ML is the practice of dividing the available data into separate subsets — typically for training, validation, and testing. This enables model fitting, hyperparameter selection, and an unbiased estimation of model generalization performance [25, 28]. When performed correctly, data splitting is essential to prevent overfitting and to ensure that a model’s predictive ability is accurately evaluated on unseen data, as emphasized in comparative studies and methodological papers. In the context of PPM, data splitting can be performed in various ways: by case ID [31, 6, 5], by time-based splits [1], or by combining both approaches [35]. The latter strategy, however, raises open questions — for example, how to handle cases that begin in one split period but end in another, as any temporal split (e.g., train/validation/test cutoff dates) can slice cases across boundaries. Ideally, one would only include finished cases that start and end within the same split. Yet, in practice, datasets with many such overlapping traces (for instance, long case durations with a relatively short data collection window) pose challenges for this approach. Furthermore, activities and (sub-)sequences are often observed as unbalanced, making stratified splits a valid option in some cases. An overview of different strategies is given in Table 1.

Information Leakage: Information leakage happens when a model is exposed during training to data that it wouldn’t have access to during real-world predictions. This can lead to misleadingly high performance in evaluations and result in unreliable models [16, 7]. This includes identical or similar samples appearing in both train and test sets, as well as more subtle forms such as temporal leakage or improper preprocessing. As Table 1 illustrates multiple ways of correctly splitting a dataset in PPM, avoiding leakage is challenging. While repeated (sub-)sequences across splits are expected

Strategy	Train	Validation	Test	Useful when...
Case-ID based (random)	(Distinct) Set of cases A	(Distinct) Set of cases B	(Distinct) Set of cases C	proving that a model is capable of learning and predicting process sequences
Time-based	Earliest events of a case	Middle events	Latest events	investigating how unfinished information affects model performances
Combination	Earliest finished cases	Intermediate finished cases	Latest finished cases	checking for models robustness when suspecting data drifts
Stratified Sequences	Set of unique, distinct Sequences A	Set of unique, distinct Sequences B	Set of unique, distinct Sequences C	suspecting huge overfit towards majority activities and (sub-)sequences

Table 1: Assignment logic for splits under each strategy. Combination splits involve both case-IDs and temporal criteria.

and valid, it may be crucial in some settings to prevent training on future or test-set information [1]. As discussed in Abb et al. [1], sometimes datasets are unbalanced with some (sub-)sequences being observed very often, and thus PPM faces a problem of low variation, risking model training to overfit.

PPM experiments must define beforehand what models are built for and what is being tried to achieve. After that, splits must be designed carefully such that temporal and causal constraints are taken care of to ensure training is only done on appropriate data which is realistic to be encountered in an inference setting. Addressing both explicit (identical sequences) and implicit (temporal, preprocessing, data drifts) leakage is essential for reliable evaluation of model performance.

Reproducibility and Setting Random Seeds: Controlling sources of randomness by setting random seeds is fundamental for reproducibility in ML, as the stochastic processes inherent in many algorithms can substantially impact results, leading to different outcomes from the same data if seeds are not fixed. Managing random seeds allows experiments to be repeated reliably and ensures that scientific findings are trustworthy and comparable [27]. While it is known that full reproducibility

over different hardware configurations might not be achievable in every case², one should at all times try to mitigate those shortcomings by publishing random seeds, trained model artifacts or relying on standardized datasets [27, 16].

Evaluation Metrics: While there are a lot of differences in the design of PPM experiments, one common evaluation metrics seems to be Accuracy used for Next Activity Prediction (see Eq. (7)). The shortcomings of the plain Accuracy metric have been widely discussed and alternatives such as resampling or algorithmic splitting of data have been introduced [30, 4]. Figure 2 shows the highly unbalanced counts of activities for the Helpdesk dataset with $N_{cases} = 4580$. This highlights the need for strategies to deal with imbalanced target labels and thus rules out the usage of plain Accuracy as the metric of choice for Next Activity Prediction. We will therefore also compare results with the Balanced Accuracy (Eq. (8)) for multiclass predictions, where $K = n_{activities}$.

$$\text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN} \quad (7) \quad \text{Balanced Accuracy} = \frac{1}{K} \sum_{k=1}^K \frac{TP_k}{TP_k + FN_k} \quad (8)$$

For measuring time differences in next timestamp and remaining time prediction, the Mean Absolute Error (MAE) (9) is commonly used. For this evaluation it has to be noted that neither approach that is recurrently predicting time targets in suffix prediction [6, 31] is using any kind of positive activation function (e.g. softplus, relu) in their models³. As a result this can lead to negative time predictions, especially when exhaustive time padding is used that yields many zero target values when predictive time distributions are learned based on (padded) historic time differences. This is even more dangerous when the metric which is evaluated on is MAE⁴, as absolute errors will hide models that tend to predict near-zero values without escaping negative ones. We copied those shortcomings for the sake of reproducibility.

$$\text{MAE} = \frac{1}{n} \sum_{i=1}^n |y_i - \hat{y}_i| \quad (9) \quad d_{DL}(a, b) = \min \begin{cases} \text{insertions} \\ \text{deletions} \\ \text{substitutions} \\ \text{transpositions} \end{cases} \quad (10)$$

When measuring errors on suffix prediction, the most commonly used metric in PPM [31, 6, 24] is the Normalized Damerau-Levenshtein (DL) Similarity $\text{sim}_{DL} = 1 - \frac{d_{DL}}{\max(|\sigma|, |\hat{\sigma}|)}$, which uses the DL-Distance d_{DL} (Eq. (10)). The DL-Distance was originally developed as a distance measure for string comparisons with four possible operations, counting the operations needed to change characters from a source string a to a target one b . In PPM, it is used not on strings but on full token sequences and is less penalizing for generated sequences that are incorrect in the ordering of activities compared to those with wrongly predicted activities (hence, substituting two activities costs 1, while deleting or inserting a wrongly predicted activity costs 2). Normalization is done by dividing the DL-Distance by the length of the longest sequence, defined as the maximum of the ground truth sequence length and the predicted sequence length. Since the ultimate goal in suffix prediction is to predict correct

²<https://docs.pytorch.org/docs/stable/notes/randomness.html>

³<https://github.com/verenich/ProcessSequencePrediction/blob/master/code/train.py#L322>, https://github.com/AdaptiveBProcess/GenerativeLSTM/blob/v1.1.0/model_training/models/model_shared_cat.py#L122

⁴<https://github.com/verenich/ProcessSequencePrediction/blob/master/code/train.py#L328>, https://github.com/AdaptiveBProcess/GenerativeLSTM/blob/v1.1.0/model_training/models/model_shared_cat.py#L140

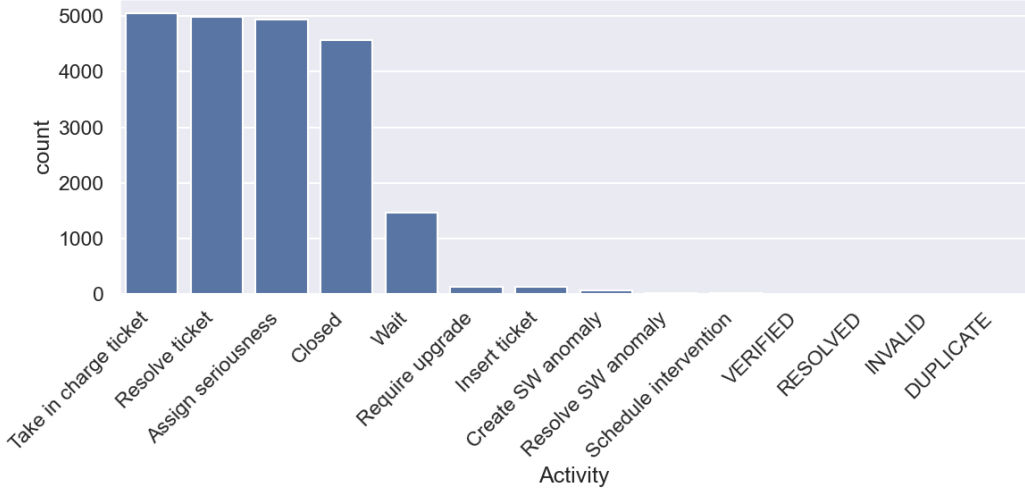


Figure 2: Total activity counts for the Helpdesk dataset. The raw dataset consists of 4580 cases.

sequences, we deem this a fair approach. Nonetheless, there are also other metrics commonly used in NLP when comparing sequences, such as the BLEU score (Eq. (11)) or the Jaccard Similarity (Eq. (12)).

$$\text{BLEU} = \text{BP} \cdot \exp \left(\sum_{n=1}^N w_n \log p_n \right) \quad (11)$$

$$J(A, B) = \frac{|A \cap B|}{|A \cup B|} \quad (12)$$

3 SPICE - Standardized Process Intelligence Comparison Engine

For SPICE, we follow a modular software design architecture, adhering to PyTorch’s DataLoader and model separation. Each implemented approach has its own specifics for data preparation and feature engineering (with its own flaws too). We aim to keep everything as is, provided it is viable and does not violate basic principles of experimental design. In an ideal scenario, one preprocessing method could be interchanged with another without affecting the model specifics — and vice versa, the preprocessing could remain unchanged while model specifics are updated to test for improvements. This concept is illustrated in Figure 1. In our approach to creating a modularized library that can be incrementally updated with new methods, we developed a central preprocessing class that prepares input and output pairs for any given dataset, as shown in Figure 3. After initial data preparation, specific implementations only handle the encoding of base features (e.g., one-hot encoding [31] or embedding [6] of activity features). By default, the output is always the remaining suffix (along with respective features such as time or resource); when selecting single prediction tasks such as next activity, only the first element is chosen as the target. This allows us to use a single preprocessing pipeline interchangeably across different prediction tasks. By design, our framework is capable of predicting both the next activity and next timestamp, using either single-step or MSP strategies.

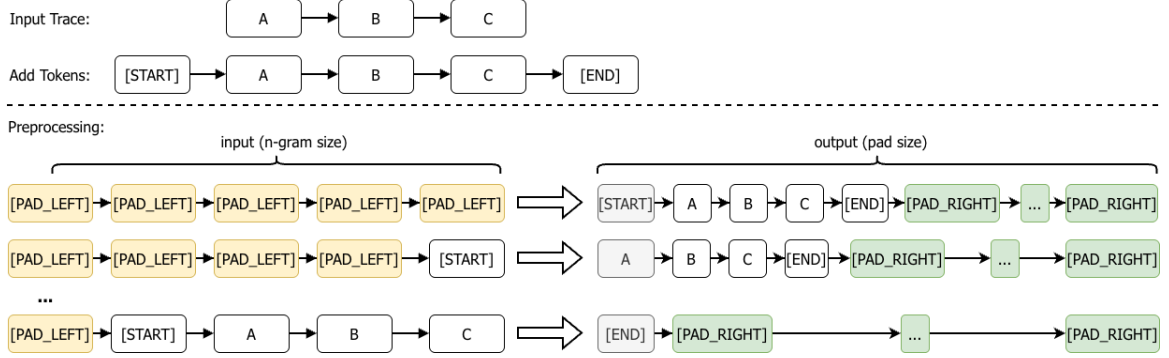


Figure 3: Preprocessing visualized: The raw input trace gets **START** and **END** tokens appended. When creating input and output pairs, to ensure equal input and output sizes, pairs are padded with the respective padding tokens. A general preprocessing class exists that creates pairs displayed here, the encoding of tokens can be specific to one implementation. In next activity and next time prediction settings, only the first element of the suffix is chosen as the target, the preprocessing stays identical though. This allows us to train and evaluate multi-step prediction models by design. Inputs and outputs can also include time and resource features to train multi-task models.

This capability extends to suffix prediction, enabling the prediction of an entire case continuation — either by recursively generating single events or by predicting multiple future events at once via MSP. Furthermore, we currently support remaining time estimation only through direct (single-shot) prediction; iterative remaining time estimation via summing predicted time increments is planned for future versions of the framework. Table 2 summarizes the current and planned prediction capabilities.

We have also abstracted most inner configurations for preprocessing and models to align with configuration management practices, specifically Hydra [36]. Configuration files for all experiments are available in the accompanying repository and are designed to be highly reproducible. Furthermore, SPICE introduces numerous quality-of-life improvements that incorporate recent advancements in deep learning and MLOps. Multiple samplers (Top-P sampling [13], Top-K sampling [21] and greedy sampling with temperature) enable more flexible control over model predictive behaviour, moving beyond the argmax (greedy) and classic random sampling used in original works. Experiments can be run in batches and logged to MLflow for comprehensive comparisons, with options to store models or output results to the console. New methods, datasets, samplers, optimizers, and other components can be easily integrated, and we invite others to contribute in the future. By default, SPICE tracks Accuracy, Balanced Accuracy, and F1-score for next activity prediction; MAE, Mean Squared Error, and Root Mean Squared Error for next time and remaining time prediction; and sim_{DL} , BLEU Score and Jaccard Similarity for suffix prediction.

4 Implementation and Derivations

This section presents the reimplementations of available architectures inside SPICE and deviations from the respective original approaches. We focus on faithfully reproducing the original methods

Target	Prediction Method	Included in initial release
Next Activity	single-step	✓
Next Activity	multi-step	✓
Next Timestamp	single-step	✓
Next Timestamp	multi-step	✓
Suffix (Activities/Attributes)	iterative & single-step	✓
Suffix (Activities/Attributes)	iterative & multi-step	✓
Suffix (Timestamps)	iterative & single-step	✓
Suffix (Timestamps)	iterative & multi-step	✓
Remaining Time	direct	✓
Remaining Time	iterative	–
Outcome	direct	–
Outcome	iterative	–

Table 2: Overview of predictive capabilities in our framework. (✓: supported; –: currently not supported.)

while addressing identified shortcomings, such as information leakage and inappropriate normalization techniques. Additionally, we outline improvements and modular design considerations that enhance reproducibility and extensibility within our framework, while ultimately leading to the derived results.

4.1 Camargo et al.

Pooling Role-Activity Pairs: The original paper implements an algorithm developed by Song and van der Aalst [29], which is a post-hoc analysis method on completed event logs and thus is not defining a way to deal with unseen data (in other terms, it is missing a fit/transform-like interface). Camargo et al. [6] have implemented this procedure prior to data splitting. This introduces information leakage by design. We implemented the same procedure initially but ultimately removed it from our experiments as we strongly believe it should be discarded and seen critically by any future researcher or reviewer that implements the pooling approach as is — as well as comparing their results against the ones from the original paper, but also from Rama-Maneiro et al. [24] which do not mention how they did proceed with this.

Pre-trained Embedding: The original paper implements a pre-training pipeline for embeddings which again is trained on the whole dataset prior to splitting. We do include the pre-training procedure of the token-embeddings outlined in [6] but after the split, only training on the train split.

Batch Normalization between Recurrent Layers: Batch normalization [14] in RNNs normalizes across sequences in the batch, meaning each sequence’s hidden state $h_t^{(i)}$ depends on other sequences through shared statistics μ and σ^2 . This breaks RNN’s independence since the same sequence gets different normalizations in different batches, making the recurrent connection $h_{t+1} = f(W_h h_t + \text{BatchNorm}(h_t))$ unstable. Layer normalization [2] fixes this by computing statistics within each sequence independently, ensuring $h_t^{(i)}$ depends only on that sequence’s own features, preserving the

sequential processing that RNNs require. Thus we reimplement the multilayer LSTM design proposed by [6] with layerwise normalization between subsequent RNN layers.

4.2 Tax et al.

Activity Encodings: The DL-Distance is designed for character-level string comparison and is not directly applicable to activity sequences. Tax et al. [31] circumvented this by encoding activities as special characters. This approach is fundamentally flawed: special character encodings are system-dependent, making them unsuitable for robust activity representation. Evidence suggests the authors encountered these limitations, too: Their implementation includes a note⁵ acknowledging anomalous distance values on certain systems, which they addressed by simply setting problematic results to zero rather than resolving the underlying issue. The frequency and impact of these errors on their experimental results remains undocumented. To ensure reliable distance calculations, we developed a native implementation that operates directly on activity sequences, which we apply uniformly across all experiments.

Batch Normalization between Recurrent Layers: Analogous to our reimplement of [6] we do apply layer normalization for our version of [31] as well. This is done solely for reproducibility of their results and not recommended. A layerwise normalization is also implemented.

Time Features: In the original paper, only three time-based features (time since last event, time since midnight, time since last sunday midnight) are mentioned being in use but in the corresponding code, five are factually applied (time since case start and a position index). Two time features — time since case start and time since last event — are scaled by their respective mean, which is computed over the whole dataset before splitting. This again introduces information leakage as defined in section 2.3. As part of our implementation we only used training data for this scaling operation. Instead of working on time differences in hours we used time differences in days, as the final results were also reported in days for all datasets and papers, but code was provided with hours instead. One might also note here that it would have been cleaner to scale the positional index and time since last sunday midnight features as well to prevent a mixture of different value scale, which we did not correct as it was not done in the original implementation.

4.3 Buksh et al.

Unweighted Accuracy Calculation: From an implementation perspective, the evaluation procedure appropriately calculates metrics for each prefix length k , enabling detailed insights into accuracy at different stages of the process. However, a concern arises in the aggregation of their results: the final average metrics are derived by computing the unweighted mean of the per-prefix scores. As the number of samples can vary substantially across prefixes, this unweighted averaging fails to account for the differing sample sizes, potentially skewing the overall performance estimates and introducing bias toward prefixes with fewer cases (longer prefixes). Consequently, a weighted aggregation that reflects the actual distribution of samples per prefix would provide a more accurate and representative summary of model performance. It is possible that Camargo et al. [6] does this error as well,

⁵https://github.com/verenich/ProcessSequencePrediction/blob/master/code/evaluate_suffix_and_remaining_time.py#L278

depending on which implementation they used for metric computation, as they include two different scripts for suffix prediction, but the original release version points towards doing the same mistake⁶.

ProcessTransformer vs. established Transformers: An architectural deficiency lies in the implementation’s use of global mean pooling followed by dense classification layers, which is incompatible with next-token prediction employed in both classic encoder-decoder [33] and decoder-only transformers [23]. Classic encoder-decoder transformers handle next-token prediction through their decoder component, which uses causal self- and cross-attention to the encoder output, terminating with a linear projection to vocabulary size at each decoder position, while decoder-only transformers similarly employ causal self-attention throughout all layers and conclude with a language modeling head that maps from hidden dimensions to vocabulary logits at each sequence position. Both approaches preserve the sequential structure necessary for autoregressive generation rather than collapsing it through global pooling. For sake of reproducibility we reimplemented ProcessTransformer with all its flaws.

5 Experimental Setup

Datasets: We report evaluation metrics from the list of benchmark datasets reported in Table 3 and a URL to the respective data sources. For the comparisons in subsection 6.1 we only report results for BPI 2012 and Helpdesk as they are the only ones used by all authors (even though BPI 2012 is used in different derivations). For the comparison in subsection 6.2 we provide metrics for the next activity prediction in accuracy and balanced accuracy for all datasets in Table 3.

Data Splitting: When comparing the data splits of the here considered different approaches, we observe the following diverging setups:

- Tax et al. [31] report metrics using a chronologically ordered 2/3 training, 1/3 evaluation split. The way their splits are implemented is by counting lines of data in the eventlog and dividing the obtained count by 3. This is not robust for different case lengths as a case may be split in half. Additionally, f.i. the Helpdesk dataset may be ordered correctly in its raw .csv format by case-id and timestamp w.r.t. each case, but it is not ordered chronologically (hence randomized by time). This does not lead to a successful chronological split.
- Camargo et al. [6] uses a two-fold 70/30 split via ordering the dataset by case end timestamps (the case finish timestamp) and using 30% of the most recent data as test and the remaining, older data as train split. Their repository additionally shows that if a case is split in between train and test it is removed from the set entirely. This aligns to a combined train/test split, without a validation set, as shown in Table 1.
- Bukhsh et al. [5] initially describe a 80% train and 20% test split, while an additional 20% of the train data is used for validation (hyperparameter tuning). This leads to an 64/16/20 split. They state this is done on the chronologically ordered dataset. In their respective repository accompanying the paper, they sort the full set by timestamp but not w.r.t. case-ids and possible overlappings, following a selection of unique case-ids. The fact that they do not

⁶https://github.com/AdaptiveBProcess/GenerativeLSTM/blob/v.1.0.0/predict_suffix_full.py#L110

Dataset	Cases	Unique Activities	Avg. Case Length	Max Case Length	Avg. Throughput Time (in days)	Available at
BPI 2012	13087	24	20.04	175	8.62	data.4tu.nl
BPI 2013	7554	4	8.68	123	12.08	data.4tu.nl
BPI 2014	46616	39	10.01	178	5.07	data.4tu.nl
BPI 2015-1	1409	383	42.36	124	62.23	data.4tu.nl
BPI 2017	31509	26	38.16	180	21.90	data.4tu.nl
BPI 2019	251734	42	6.34	990	71.52	data.4tu.nl
BPI 2020d	10500	17	5.37	24	11.53	www.tf-pm.org
BPI 2020i	6449	34	11.19	27	86.46	www.tf-pm.org
Helpdesk	4580	14	4.66	15	40.86	data.4tu.nl
Hospital Billing	99999	18	4.51	217	127.36	data.4tu.nl
Road Traffic	150370	11	3.73	20	341.67	data.4tu.nl

Table 3: Implemented Datasets.

mitigate the possibility that a case could be starting in the desired train time-window but end in the test-window will lead to a simple case-id based train/test split ultimately.

As a result we implement a simple 80/10/10 train-validation-test split by case-id as described in Table 1. While we are aware of the shortcoming of a simple train test split, we want to highlight the computational resources needed to do a cross validation study on all datasets, especially for the most resource hungry suffix prediction [6, 24].

Preprocessing: For fair model comparison, standardized input processing is essential and already described in section 3. Additionally, when choosing input sizes (also often referred to as n-gram size), we followed the respective settings mentioned in each paper. For padding to constant output sizes we introduce a new technique to our preprocessing pipeline. Instead of checking the whole dataset for a maximum trace length $l = \max_{\sigma \in D}(|\sigma|)$ which was done by the other authors, we use a pad size $p = 2^8$ so that $l < p$. In reality, other implementations would not be feasible for productive tasks, as they could not deal with larger trace lengths. Also, the computation of l in the published and discussed contributions again was done on the complete set, which again introduces data leakage, and will lead to overly optimistic results⁷.

Models: As outlined in subsection 2.2 we directly adapted the models from [31], [6] and [5] for usage in PyTorch. We tried to stay as close as possible to the original implementations with respect to their repositories^{8,9,10}. The chosen (hyper)parameters were based on the authors’ best reported

⁷Think of generating a trace length of $p=64$ instead of e.g. $l=48$ to a reference scenario of the length 30. DL-Distance operations could increase more dramatically as the underlying PPM model has more room to hallucinate longer process executions.

⁸<https://github.com/Zaharah/processtransformer>

⁹<https://github.com/AdaptiveBProcess/GenerativeLSTM>

¹⁰<https://github.com/verenich/ProcessSequencePrediction>

metrics. Whenever more than one parameter combination scored identical, as with MAE for [31], we did an experiment to find the best combination and report the respective metrics in section 5. Further hyperparameter optimization was refrained from, as this is not the main focus of this paper and would only make evaluation more complex and cumbersome to follow.

Training: Our training protocol uses cross entropy loss for next activity prediction and MAE for next timestamp prediction. The only exception for the latter is with regards to [5] who implements $\log\text{-cosh } \frac{1}{b} \sum_i^b \log(\cosh(\hat{y}_i - y_i))$, with b for batch size, as the loss, an objective function that behaves as kind of a MAE/Mean Squared Error-hybrid. Each model is trained for 100 epochs with early stopping set to 10 epochs patience, saving the best model based on validation loss to the preconfigured directory.

Sampling: Sampling strategies are once again a diverging topic in the re-implemented approaches and are having a considerable impact on next activity and suffix prediction. Camargo et al. [6] compare argmax and random sampling, which show noticeable effects on the respective metrics. As random sampling showed the most promising results, we used this in our experiments. For Tax et al. [31] it is never stated which sampling approach they used, from the repository one can only assume that they employ an argmax approach, which is also used as part of the comparisons in section 6. The same is the case for Bukhsh et al. [5].

Evaluation Metrics: To enable comparability with the reported metrics of the original papers, for next activity prediction tasks we use the *accuracy*, whereas for next timestamp prediction, we report MAE. We also provide *balanced accuracy* as the plain accuracy metric will lead to problems due to the imbalanced nature of the labels/activities being predicted.

6 Evaluation

In this section we report resulting metrics for our reimplementation in comparison to the original reported ones for each of the three chosen approaches. To keep the comparisons as simple as possible, we first report the accuracy and timestamp prediction. For suffix and remaining time prediction we aligned scales (days vs. hours) and report similarity scores as sim_{DL} . We also provide metrics for balanced accuracy regarding next activity in subsection 6.2. In general it has to be noted that our results for suffix prediction might be worse by design as we drastically increase the pad sizes, which leads to more room for errors due to hallucination.

Overall it becomes clear that while each paper compares its results to one another, they lacked a common experimental design or used different variations of the chosen datasets. The only dataset that is used by all authors in its original form was the Helpdesk one. We do not include derivations of datasets (such as BPI 2012W or BPI 2012WC), as we strive to create a baseline for comparison of past and future approaches. The plethora of different dataset combinations is not helpful for a sound and scientifically rigorous comparison.

6.1 Evaluation & Metric Comparison

Camargo et al.: Results for our implementations of the models from Camargo et al. [6] are displayed in Table 4. The results for next activity prediction have improved overall, which could be due to us using only 10% of the data as test split. Regarding next timestamp prediction, no metrics were reported in the original paper. Hence, we only report the metrics for experiments within our framework.

For remaining time, the original paper uses an MSP approach: they predict each activity in the suffix sequentially, and for each predicted activity, they also predict the corresponding timestamp and resource in a multi-target prediction framework. The last timestamp in the suffix is then used as the base for calculating remaining time, by subtracting from it the latest timestamp information in the prefix (input). Contrasting this indirect approach, we predict the remaining time directly for now (see Table 2). The improvement is in accordance with the findings of Rama-Maneiro et al. [24], where direct prediction outperforms the indirect iterative prediction.

For the results on suffix prediction, we can only presume that our changes in preprocessing have significantly decreased the metrics. This is somewhat understandable, as the original implementation likely never dealt with unknown tokens (because activity resource pooling was done on the complete dataset). Even combining unknown tokens with resource information would add a substantial amount of additional information. Other review papers, such as Rama-Maneiro et al. [24], have also failed to reproduce the original metrics. This difficulty is compounded by the use of random sampling for next-event prediction during suffix generation. Since we employ the same random sampling strategy as the original paper, this stochastic element introduces additional challenges for exact reproducibility. Considering this, the reported scores in the original work may appear overly optimistic.

Dataset	Next Activity ^a		Next Timestamp ^e		Suffix ^d		Remaining Time ^e	
	Original	Ours	Original	Ours	Original	Ours	Original ⁱ	Ours
BPI 2012	0.786	0.869	–	0.353	0.632	0.390	8 *	7.267
Helpdesk	0.789	0.865	–	3.766	0.917	0.698	6.1	5.962

Table 4: Evaluation Metrics of Camargo et al. [6] and our results. * Compared to BPI 2012W as this is the only metric available from the original paper. ⁱ The authors do not provide metrics but bar plots, hence the metrics are approximated. ^a in Accuracy; ^e in MAE (days); ^d in sim_{DL}

Tax et al.: Table 5 provides a comparison between our results and the original ones from Tax et al. [31]. For next activity prediction, as previously observed for the case of Camargo et al. [6], we achieve slightly better results. This may again be an artifact of our experimental design, which uses only 10% of the data as the test set. For next-time prediction, we changed the scale from hours to days in the code. The results are somewhat comparable to the original ones. The difference for BPI 2012 might be due to us using of the original dataset, while Tax used a derived version (BPI 2012 W).

The results for suffix prediction were generated using argmax (greedy) sampling, which significantly affects outcomes: for BPI 2012, greedy sampling resulted in lower overall similarity scores compared to the original. During repeating the experiment with a random sampling strategy, as it is being done in the other experiments, we achieved better results with a $sim_{DL} = 0.391$. Noticeably, Rama-

Maneiro et al. [24] also reported lower metrics for this prediction task with $sim_{DL} = 0.1409$, without clearly stating which sampler was implemented. When comparing results for the Helpdesk and BPI 2012 datasets, we observe increased performance for more complex logs such as BPI 2012 when using random sampling, while less complex logs like Helpdesk perform better with sticking to the greedy event trace. This makes sense from a probabilistic perspective: having more activities may be harder to learn, and random sampling is better at producing more genuine and diverse sequences. For simpler logs with fewer activities that tend towards somewhat unbalanced label distribution, our greedy strategy has a much higher chance of predicting one of the majority classes, making it less error-prone but unable to predict unlikely but occurring sequences, which are arguably more interesting to the respective user group. This leads to the conclusion that moving beyond these extreme sampling poles and employing more flexible options, such as Top-P and Top-K sampling, to achieve results between these extremes may be beneficial in the future.

Dataset	Next Activity ^a		Next Timestamp ^e		Suffix ^d		Remaining Time ^e	
	Original <i>i</i>	Ours	Original <i>ii</i>	Ours	Original	Ours	Original <i>iii</i>	Ours
BPI 2012 *	0.760	0.877	1.45	0.313	0.353	0.194	5.8	7.298
Helpdesk	0.712	0.870	2.11	2.825	0.767	0.898	4.2	6.03

Table 5: Evaluation Metrics of Tax et al. [31] and our results. * For BPI 2012, Tax et al. [31] report metrics for BPI 2012 W while we used the standard BPI 2012 dataset. *i* Compared metrics are for model architecture $layers = 2$, $layers_{shared} = 1$, $ngram = 10$. *ii* Compared metrics are for model architecture $layers = 2$, $layers_{shared} = 1$. *iii* The authors do not provide metrics but bar plots, hence the metrics are approximated. ^a in Accuracy; ^e in MAE (days); ^d in sim_{DL}

Buksh et al.: Results for next activity prediction in Table 6 are only showing slight differences. For suffix prediction, no metrics have been reported in the original study. Our results suggest that the transformer model is performing best here, which makes sense as its architecture is capable of analysing long range dependencies in sequences.

For next timestamp and remaining time prediction, our results are worse. This could be linked to the usage of log-cosh, as this loss function is less penalizing on errors and datasets with a low number of cases, such as Helpdesk, might not be enough data to successfully train the model. Unfortunately, we also do not have another reference to compare our values with as Rama-Maneiro et al. [24] did not include this model in their comparison. As we pointed out in subsection 4.3, the as the accuracy computation is unweighted for next activity, this is also the case for next time prediction.

Dataset	Next Activity ^a		Next Timestamp ^e		Suffix ^d		Remaining Time ^e	
	Original	Ours	Original	Ours	Original	Ours	Original	Ours
BPI 2012	0.852	0.830	0.250	0.658	—	0.403	4.6	7.8
Helpdesk	0.856	0.837	2.980	9.202	—	0.856	3.72	5.888

Table 6: Evaluation Metrics of Buksh et al. [5] and our results. The original paper did not conclude experiments for suffix prediction. * the original paper reports metrics for BPI 2013i. ^a in Accuracy; ^e in MAE (days); ^d in sim_{DL}

6.2 Comparison with Balance Aware Metrics

We provide results in for all datasets in Table 3 for each respective approach. For datasets which have not been used in the original paper, we chose hyperparameters from the most similar dataset in terms of dataset characteristics (see Table 3). For Bukhsh et al. [5], all hyperparameters were kept at default setting. In Camargo et al. [6] and Tax et al. [31], for BPI 2020d, BPI 2020i and Road Traffic we re-used hyperparameters from Helpdesk as all datasets share a medium amount of unique activities and max case lengths is considerably short. For Hospital — which consists of some long cases — we used best settings from BPI 2013 (BPI 2012 for Tax). Additionally, for Tax et al. [31] we re-used parameters from BPI 2012 for the BPI 2013 and BPI 2015-1 datasets.

Table 7 reports metrics of all models on next activity prediction with balanced accuracy in comparison to plain accuracy scores. All models perform worse on the former one, which was expected. The drop in performance for datasets that have high imbalance in activities such as Helpdesk (compare Figure 2) is very alarming as it shows that models are not able to capture deviations from standard process paths. We again want to emphasize that these deviations represent the most valuable sequences to identify, especially when considering downstream applications. Such deviations are often overlooked in otherwise straightforward processes, yet they provide the most actionable insights. A model that only learns the standard process model and is biased toward frequently occurring process paths might be of little or no practical use.

Dataset	Camargo et al.		Tax et al.		Buksh et al.	
	Acc	Bal. Acc	Acc	Bal. Acc	Acc	Bal. Acc
BPI 2012	0.869	0.655	0.877	0.692	0.830	0.614
BPI 2013	0.801	0.662	0.764	0.611	0.726	0.499
BPI 2015-1	0.540	0.344	0.533	0.364	—	—
BPI 2020d	0.912	0.496	0.912	0.496	0.898	0.462
BPI 2020i	0.859	0.480	0.887	0.517	0.869	0.491
Helpdesk	0.865	0.398	0.870	0.408	0.837	0.350
Hospital	0.942	0.584	—	—	0.844	0.464
Road Traffic	0.879	0.694	—	—	0.853	0.667

Table 7: Compared metrics of achieved Accuracy and Balanced Accuracy. The decline in Balanced Accuracy metrics is larger for datasets with more unbalanced activity distributions.

7 Conclusion and Future Work

This work outlines a number of deviations in experimental designs from papers that are frequently used to benchmark new approaches and research ideas in the field of PPM. We have collected and aggregated opinions and findings that came up during researching the respective modelling approaches and discussed fundamental questions regarding fair data splitting, the use of class-imbalance-aware metrics, and fundamental design flaws. By that, we illustrate the shortcomings of the de-facto baseline models in PPM [31, 6, 5]. In our opinion, future research should keep the deviations highlighted in this work in mind and refrain from building on top of these flawed designs as such.

Therefore, we provide a framework on which future research can build, enabling ablation studies, out-

of-the-box comparison of newer methods with older ones, and the recreation of trustworthy baseline metrics using modern ML standards. We encourage researchers to reuse, modify, and extend our framework in the future. Furthermore, we believe that research in PPM should not stop at providing metrics but should also aim for practical impact by including evaluations with key-user studies to demonstrate real-world usefulness, while acknowledging that public process data are scarce and that finding key users for evaluations is challenging. Without such evidence, however, the risk of creating just another theoretical research bubble increases.

References

- [1] Luka Abb, Peter Pfeiffer, Peter Fettke, and Jana-Rebecca Rehse. A Discussion on Generalization in Next-Activity Prediction, September 2023. URL <http://arxiv.org/abs/2309.09618>. arXiv:2309.09618 [cs].
- [2] Jimmy Lei Ba, Jamie Ryan Kiros, and Geoffrey E. Hinton. Layer normalization, 2016. URL <https://arxiv.org/abs/1607.06450>.
- [3] Monya Baker. Reproducibility crisis. *nature*, 533(26):353–66, 2016.
- [4] Kay Henning Brodersen, Cheng Soon Ong, Klaas Enno Stephan, and Joachim M Buhmann. The balanced accuracy and its posterior distribution. In *2010 20th international conference on pattern recognition*, pages 3121–3124. IEEE, 2010.
- [5] Zaharah Allah Bukhsh, Aaqib Saeed, and Remco M. Dijkman. Processtransformer: Predictive business process monitoring with transformer network. *CoRR*, abs/2104.00721, 2021. URL <https://arxiv.org/abs/2104.00721>.
- [6] Manuel Camargo, Marlon Dumas, and Oscar González-Rojas. Learning Accurate LSTM Models of Business Processes. In *Business Process Management: 17th International Conference, BPM 2019, Vienna, Austria, September 1–6, 2019, Proceedings*, pages 286–302, Berlin, Heidelberg, September 2019. Springer-Verlag. ISBN 978-3-030-26618-9. doi: 10.1007/978-3-030-26619-6_19. URL https://doi.org/10.1007/978-3-030-26619-6_19.
- [7] Ganesh Del Grosso, Georg Pichler, Catuscia Palamidessi, and Pablo Piantanida. Bounding information leakage in machine learning. *Neurocomputing*, 534:1–17, May 2023. ISSN 0925-2312. doi: 10.1016/j.neucom.2023.02.058. URL <http://dx.doi.org/10.1016/j.neucom.2023.02.058>.
- [8] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009.
- [9] Joerg Evermann, Jana-Rebecca Rehse, and Peter Fettke. Predicting process behaviour using deep learning. *Decision Support Systems*, 100:129–140, August 2017. ISSN 0167-9236. doi: 10.1016/j.dss.2017.04.003. URL <http://dx.doi.org/10.1016/j.dss.2017.04.003>.
- [10] Marc C. Hennig. *Towards Accurate Predictions in ITSM: A Study on Transformer-Based Predictive Process Monitoring*, page 214–226. Springer Nature Switzerland, 2025. ISBN 9783031822254. doi: 10.1007/978-3-031-82225-4_16. URL http://dx.doi.org/10.1007/978-3-031-82225-4_16.

- [11] Marc C. Hennig and Rainer Schmidt. *Leveraging Temporal Graphs for Enhancing Transformer-Based Predictive Process Monitoring*, page 291–307. Springer Nature Switzerland, August 2025. ISBN 9783032028679. doi: 10.1007/978-3-032-02867-9_18. URL http://dx.doi.org/10.1007/978-3-032-02867-9_18.
- [12] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural Computation*, 9(8):1735–1780, 1997. doi: 10.1162/neco.1997.9.8.1735.
- [13] Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. The curious case of neural text degeneration, 2020. URL <https://arxiv.org/abs/1904.09751>.
- [14] Sergey Ioffe and Christian Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. 2015. URL <https://arxiv.org/abs/1502.03167>.
- [15] Saidul Islam, Hanae Elmekki, Ahmed Elsebai, Jamal Bentahar, Najat Drawel, Gaith Rjoub, and Witold Pedrycz. A comprehensive survey on applications of transformers for deep learning tasks, 2023. URL <https://arxiv.org/abs/2306.07303>.
- [16] Sayash Kapoor and Arvind Narayanan. Leakage and the reproducibility crisis in machine-learning-based science. *Patterns*, 4(9), 2023.
- [17] Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- [18] Yann LeCun, Corinna Cortes, and CJ Burges. Mnist handwritten digit database. *ATT Labs [Online]*. Available: <http://yann.lecun.com/exdb/mnist>, 2, 2010.
- [19] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European conference on computer vision*, pages 740–755. Springer, 2014.
- [20] Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. MS MARCO: A human generated machine reading comprehension dataset. *CoRR*, abs/1611.09268, 2016. URL <http://arxiv.org/abs/1611.09268>.
- [21] Georgy Noarov, Soham Mallick, Tao Wang, Sunay Joshi, Yan Sun, Yangxinyu Xie, Mengxin Yu, and Edgar Dobriban. Foundations of top- k decoding for language models, 2025. URL <https://arxiv.org/abs/2505.19371>.
- [22] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zach DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library, 2019. URL <https://arxiv.org/abs/1912.01703>.
- [23] Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. Improving language understanding by generative pre-training. 2018.
- [24] Efrén Rama-Maneiro, Juan C. Vidal, and Manuel Lama. Deep learning for predictive business process monitoring: Review and benchmark, 2021. URL <https://arxiv.org/abs/2009.13251>.

- [25] Sebastian Raschka. Model evaluation, model selection, and algorithm selection in machine learning, 2020. URL <https://arxiv.org/abs/1811.12808>.
- [26] Johannes Roider, An Nguyen, Dario Zanca, and Bjoern M Eskofier. Assessing the performance of remaining time prediction methods for business processes. *IEEE Access*, 2024.
- [27] Harald Semmelrock, Tony Ross-Hellauer, Simone Kopeinik, Dieter Theiler, Armin Haberl, Stefan Thalmann, and Dominik Kowald. Reproducibility in machine learning-based research: Overview, barriers and drivers, 2025. URL <https://arxiv.org/abs/2406.14325>.
- [28] Krutik Shah, Shubh Shah, Vatsal Shah, Prof Godbole, et al. Optimization of data splitting methods for machine learning. *Optimization Of Data Splitting Methods For Machine Learning (March 23, 2025)*, 2025.
- [29] Minseok Song and Wil M. P. van der Aalst. Towards comprehensive support for organizational mining. *Decision Support Systems*, 46(1):300–317, December 2008. ISSN 0167-9236. doi: 10.1016/j.dss.2008.07.002. URL <https://www.sciencedirect.com/science/article/pii/S0167923608001280>.
- [30] Vimalraj S Spelman and R Porkodi. A review on handling imbalanced data. In *2018 international conference on current trends towards converging technologies (ICCTCT)*, pages 1–11. IEEE, 2018.
- [31] Niek Tax, Ilya Verenich, Marcello La Rosa, and Marlon Dumas. Predictive business process monitoring with LSTM neural networks. In *Proceedings of the 29th International Conference on Advanced Information Systems Engineering*, pages 477–492. Springer, 2017.
- [32] Wil Van Der Aalst. Process mining. *Communications of the ACM*, 55(8):76–83, 2012.
- [33] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. *CoRR*, abs/1706.03762, 2017. URL <http://arxiv.org/abs/1706.03762>.
- [34] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. GLUE: A multi-task benchmark and analysis platform for natural language understanding. 2019. In the Proceedings of ICLR.
- [35] Brecht Wuyts, Seppe Vanden Broucke, and Jochen De Weerd. Sutran: an encoder-decoder transformer for full-context-aware suffix prediction of business processes. In *2024 6th International Conference on Process Mining (ICPM)*, pages 17–24. IEEE, 2024.
- [36] Omry Yadan. Hydra - a framework for elegantly configuring complex applications. Github, 2019. URL <https://github.com/facebookresearch/hydra>.