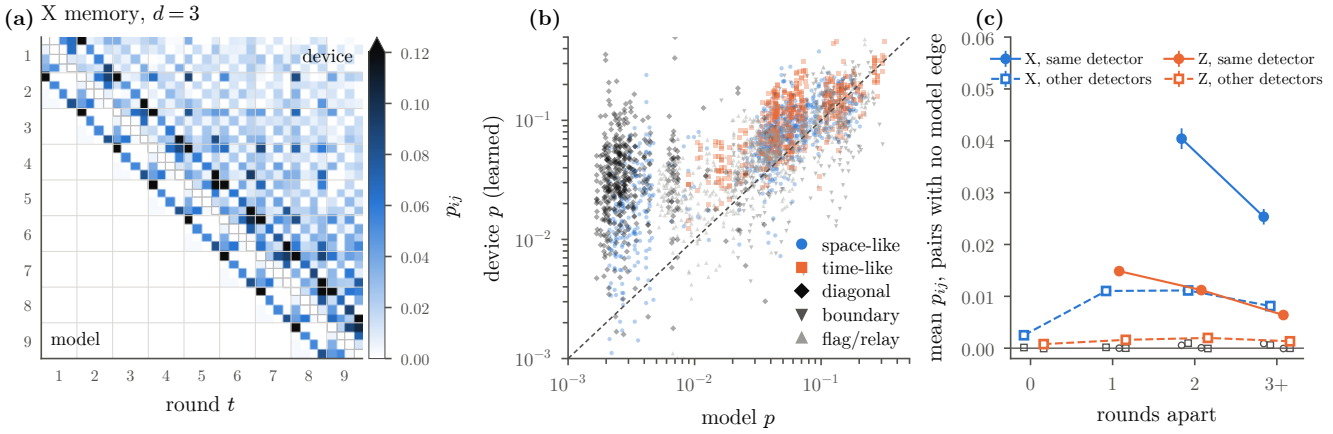

(a) X memory, $d = 3$
device
model
round t
p_{ij}
(b)
device p (learned)
model p
space-like
time-like
diagonal
boundary
flag/relay
(c)
mean p_{ij}, pairs with no model edge
X, same detector
X, other detectors
Z, same detector
Z, other detectors
rounds apart