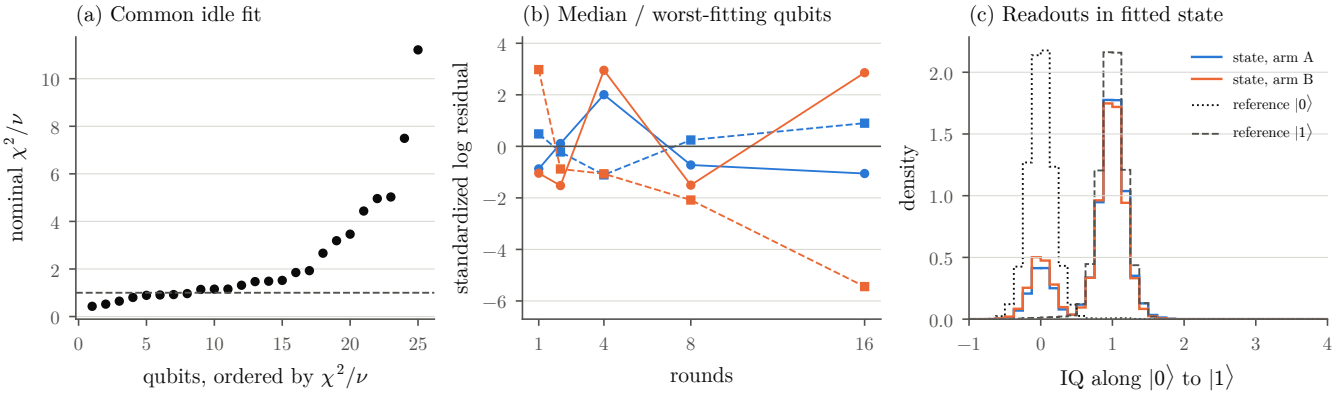
(a) Common idle fit
nominal χ^2/ν
qubits, ordered by χ^2/ν
(b) Median / worst-fitting qubits
standardized log residual
rounds
(c) Readouts in fitted state
density
IQ along $|0\rangle$ to $|1\rangle$
state, arm A
state, arm B
reference $|0\rangle$
reference $|1\rangle$