

# Dataflow for Real-Time Ads Analytics

[https://github.com/GoogleCloudPlatform/dataflow-solution-guides/blob/main/use\\_cases/ads\\_analytics\\_dataflow\\_guide.md](https://github.com/GoogleCloudPlatform/dataflow-solution-guides/blob/main/use_cases/ads_analytics_dataflow_guide.md)

## Reference Architecture

### Overview

Digital advertising creates new opportunities and challenges for winning in an already crowded attention market. For many businesses, maximizing your return on ad spend is the difference between thriving and surviving. Real-time ads analytics integrates continuous analytics into your programmatic advertising campaigns, helping companies bid more intelligently on ad inventory and tightening the loop between impression and conversion. Instead of waiting at least 1-7 days to analyze the results of an ad campaign, companies can inspect how their campaigns are performing in less than ten minutes, enabling them to optimize inventory targeting, creative, and other bidding strategies in real-time.

### Business Impact

Integrating real-time analytics with your media buying creates several opportunities for value capture:

- **Maximize return on ad spend (RoAS):** Rapidly iterate through bidding strategies & converge on the optimal price points for your targeted inventory. Real-time analysis can help you fine-tune your strategy across a variety of dimensions to maximize your return on investment.
- **Agile decision making:** Real-time analysis enables you to respond to trends, issues, or opportunities in the moment. Customers have shifted from inter-day changes to their ad campaigns with intra-day adjustments.
- **Improved targeting:** Pinpoint the best performing inventory on a campaign by campaign basis. Retarget users by incorporating user behavior as they happen.
- **Fraud detection & prevention:** Identify suspect inventory and prevent your campaigns from fraudulent traffic across impressions, clicks, and conversions.
- **Creative optimization:** Iterate through several variations of creatives and identify the best performing ones in real-time.
- **Brand safety:** Ensure that your ad campaigns are serving on acceptable ad inventory and protect your brand's image.

Leveraging real-time ad analytics with your existing business present unique opportunities across different industries:

- **Retail & E-Commerce:** Integrate your data from your best performing advertising campaigns with your sales information in your product catalog and craft personalized offers down to the user level to maximize RoAS.
- **Media & Entertainment:** Drive new viewers to your media properties & streaming video websites by targeting campaigns to your most engaged audiences. On the monetization side, identify the best performing advertisements in real-time for display during the watching experience.
- **Gaming:** Present personalized offers to potential new players with your ad campaign determined by analysis of real-time campaign performance data.
- **Travel & Hospitality:** Find high-propensity audiences for travel offers & hospitality packages using conversion data collected from ad campaigns.

## Customer Stories

- [Booking.com](#) created their own mass ad bidding platform using Apache Beam, which accelerated their processing time from 6 hours to 10 minutes using streaming pipelines on Dataflow
- [Moloco](#) creates & updates its prediction model for real-time ad bidding using Dataflow, which enables it to programmatically bids on half-a-dozen data exchanges, providing access to a combined 50B daily impressions.
- [Just Eat Takeaway](#) uses the Google AdsIO Beam connector to query data and write data from Google Ads directly to BigQuery, enabling the company to make intraday bidding strategies updates.

## Technical Benefits

- **AdsIO connector:** Apache Beam includes support for AdsIO, which helps customers ingest data from their Google Ads accounts into BigQuery in real-time, reducing the wait time of data from ~24 hours to less than ten minutes. The Google AdsIO to BigQuery template allows users to query data from Google AdsIO without having to tediously download reports across dozens of accounts.
- **Dataflow ML:** Combine your campaign performance data with customer propensity & churn models to increase future campaign effectiveness. Dataflow ML allows you to implement the entire machine learning ops lifecycle – from preprocessing, feature engineering, training, and inference – with your ads data.
- **Template extensibility:** Dataflow Templates helps you standardize your business logic and enables teams to invoke the same pipeline via a REST API endpoint. This

feature prevents companies from having to reinvent the wheel and instead helps scale common data models for real-time data across an organization.


- **Limitless scalability:** User, impression, and conversion data can quickly add up to TBs of data for analysis, but with Shuffle & Streaming Engine, Dataflow gives you the ability to scale your analytics well beyond self-managed infrastructure, and does with zero tuning required.
- **BigTable integration:** Leverage Dataflow's BigTable sink to ingest your campaign performance analytics and update your bidding strategies in real-time.

## Architecture

In this architecture, in addition to the analytics use case, we are assuming that Dataflow will also directly propose bids for ads. Since time-to-bid is an essential property, we are connecting Dataflow directly to the Ads API to bid.

The pipeline is probably connected to clickstream data, coming from user interactions with an app or a web. We assume those interactions are published into a topic in Pub/Sub or Kafka. The details on how to publish those interactions are out of the scope of this architecture.

For a decision about the bid, it may be necessary to import some previous historical data, and do some reconciliation of the bid prediction with that historical data, before the bid is actually committed to the ads API. For the architecture, we are assuming that this historical data is stored in BigQuery, but other alternatives are also possible.

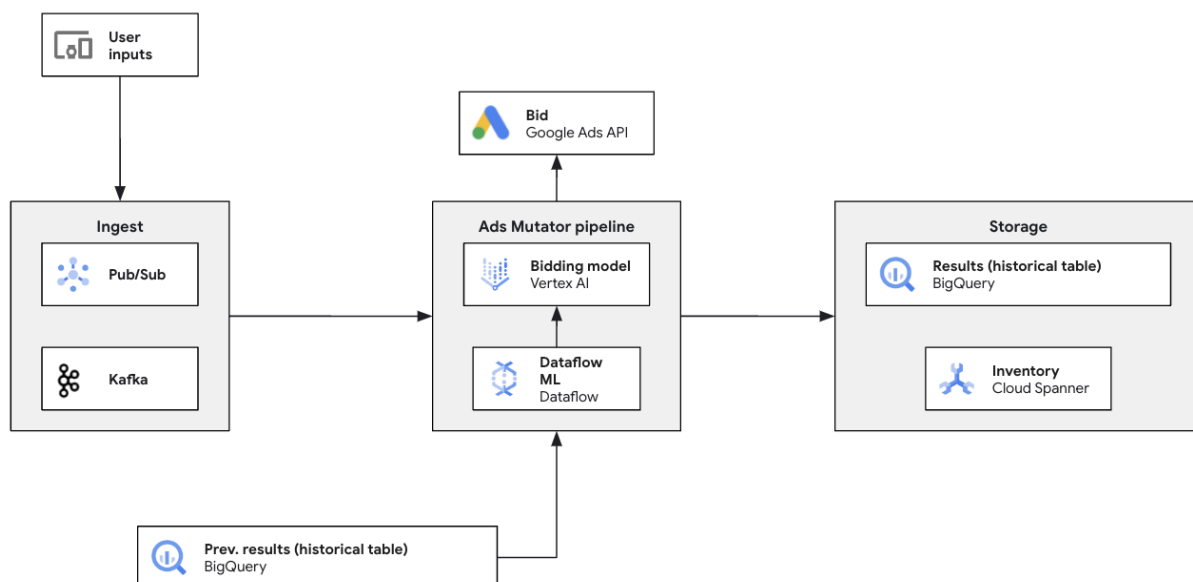

So the architecture needs the following components:

- Pub/Sub or Kafka topic. The user interactions will be published into this topic.
- The origin BigQuery dataset and table, with historical data.
- A Dataflow job, possibly using GPUs, to enable fast inference in streaming.
- A destination BigQuery dataset, to write output for analytics purposes.
  - As an alternative, the output could also be written to Spanner, as [in the case study of Booking.com](#)
- Networking setup for the Dataflow job to reach the bidding API. This may require using Cloud NAT, public IPs, or other alternatives.

## Design considerations

The pipeline for this use case needs to make a decision about ads bidding. For that, it may be necessary to import some previous historical data, and do some reconciliation of the bid prediction with that historical data, before the bid is actually committed to the ads API.

The decision should leverage AI/ML. The above architecture simplifies by omitting the data enrichment and feature engineering steps, but those are essential steps to be done before any ML model can be applied to the data.

So when designing the pipeline, you should take into consideration the following points:

Step	Description
Real time input and output (Extract)	The architecture assumes Cloud Pub/Sub or Kafka for receiving data in real time. Setting up the real time export from the system recording the user interactions and publishing into Pub/Sub or Kafka is out of the scope of this design.
Enrichment (Transform)	We are assuming that the upstream data sources will only populate a "customer id" or "user id", and that any other feature required for the inference process is stored in Bigtable, Vertex AI Feature Store, or any other fast-lookup database. In the above architecture, we assume it is Bigtable, since it is <a href="#">supported by the turnkey "Enrichment" transform of Apache Beam</a> . The same would work for Vertex AI Feature store.

	<p>For any other database, the design may require the development of custom code for lookups. We recommend using the <a href="#">Web APIs I/O connector</a> in those cases.</p> <p>Combining the Enrichment and Web APIs I/O may require using cross language pipelines with the <a href="#">Dataflow runner v2</a> (see <a href="#">instructions for Python</a> and <a href="#">for Java</a>).</p>
Inference (Transform)	<p>Once the data is hydrated and all the necessary features are extracted, we can apply ML/AI models to our data. <a href="#">The RunInference turnkey transform</a> works both with external models deployed and with local models <a href="#">leveraging a GPU</a>.</p> <p>The external models could be <a href="#">deployed in a Vertex AI endpoint</a>, <a href="#">as a HuggingFace pipeline</a>, as a GenAI API such as Gemini or <a href="#">Gemma</a>, and <a href="#">many other options</a>.</p>
Output (Load)	<p>The value of processing ad bids in streaming is in the low latency of the response. So it is essential that the pipeline responds as soon as possible. For this purpose, we recommended using the <a href="#">Web APIs I/O connector</a>. In the case of Google Ads, <a href="#">Beam has a dedicated connector</a> that can be used.</p> <p>In addition to sending the bid to Google Ads (or any other ads API), the pipeline also crystallizes the bids in an output database. For analytics purposes, the bids and the input is written to BigQuery. It could also be written to a transactional database, such as a Spanner, for inventory / accounting purposes.</p>

# Planning your pipelines

We will cover key considerations when planning your Dataflow pipelines in this section.

## Service level objectives & indicators (SLOs and SLIs)

An important measure of performance is how well your pipeline meets your business requirements. Service level objectives (SLOs) provide tangible definitions of performance that you can compare against acceptable thresholds. For example, you might define the following example SLOs for your system:

- **Data freshness:** generate 90% of product recommendations from user website activity that occurred no later than 3 minutes ago.
- **Data correctness:** within a calendar month, less than 0.5% of customer invoices contain errors.
- **Data isolation/load balancing:** within a business day, process all high-priority payments within 10 minutes of lodgement, and complete standard-priority payments by the next business day.

You can use service level indicators (SLIs) to measure SLO compliance. SLIs are quantifiable metrics that indicate how well your system is meeting a given SLO. For example, you can measure the example data-freshness SLO by using the age of the most recently processed user activity as an SLI. If your pipeline generates recommendations from user activity events, and if your SLI reports a 4-minute delay between the event time and the time the event is processed, the recommendations don't consider a user's website activity from earlier than 4 minutes. If a pipeline that processes streaming data exceeds a system latency of 4 minutes, you know that the SLO is not met.

## Sources & sinks

To process data, a data pipeline needs to be integrated with other systems. Those systems are referred to as sources and sinks. Data pipelines read data from sources and write data to sinks. In addition to sources and sinks, data pipelines might interact with external systems for data enrichment, filtering, or calling external business logic within a processing step.

For scalability, Dataflow runs the stages of your pipeline in parallel across multiple workers. Factors that are outside your pipeline code and the Dataflow service also impact the scalability of your pipeline. These factors might include the following:

- **Scalability of external systems:** external systems that your pipeline interacts with can constrain performance and can form the upper bound of scalability. For example,

an [Apache Kafka](#) topic configured with an insufficient number of partitions for the read throughput that you need can affect your pipeline's performance. To help ensure that the pipeline and its components meet your performance targets, refer to the best practices documentation for the external systems that you're using. You can also simplify infrastructure capacity planning by using Google Cloud services that provide built-in scalability. For more information, see [Using Google Cloud managed sources and sinks](#) on this page.

- **Choice of data formats:** certain data formats might be faster to read than others. For example, using data formats that support parallelizable reads, such as Avro, is usually faster than using CSV files that have embedded newlines in fields, and is faster than using compressed files.
- **Data location and network topology:** the geographic proximity and networking characteristics of data sources and sinks in relation to the data pipeline might impact performance.

## Regional considerations

Dataflow is offered as a managed service in [multiple Google Cloud regions](#). When choosing a region to use to run your jobs, consider the following factors:

- The location of data sources and sinks
- Preferences or restrictions on data processing locations
- Dataflow features that are offered only in specific regions
- The region that's used to manage execution of a given job
- The zone that's used for the job's workers

For a given job, the region setting that you use for the job and for the workers can differ. For more information, including when to specify regions and zones, see the [Dataflow regions documentation](#).

By specifying regions to run your Dataflow jobs, you can plan around regional considerations for high availability and disaster recovery. For more information, see [High availability and geographic redundancy](#).

## Security

As a fully managed service, Dataflow automatically encrypts data that moves through your data pipeline using Google-managed encryption keys for both in-flight data and at-rest data. Instead of using Google-managed encryption keys, you might prefer to [manage your own encryption keys](#). For that case, Dataflow supports customer-managed encryption keys (CMEK) using the [Cloud Key Management Service \(KMS\)](#). You can also use [Cloud HSM](#), a

cloud-hosted hardware security module (HSM) service that allows you to host encryption keys and perform cryptographic operations in a cluster of [FIPS 140-2 Level 3](#) certified HSMs.

When you use CMEK, Dataflow uses your Cloud KMS key to encrypt the data, [except for data-key-based operations such as windowing, grouping, and joining](#). If data keys contain sensitive data, such as personally identifiable information (PII), you must hash or otherwise transform the keys before they enter the Dataflow pipeline.

## Networking

Your networking and security requirements might mandate that VM-based workloads such as Dataflow jobs use only private IP addresses. Dataflow lets you specify that workers use private IP addresses for all network communication. If public IPs are disabled, you must enable [Private Google Access](#) on the subnetwork so that Dataflow workers can reach Google APIs and services.

We recommend that you disable public IPs for Dataflow workers, unless your Dataflow jobs require public IPs to access network resources outside of Google Cloud. Disabling public IPs prevents Dataflow workers from accessing resources that are outside the subnetwork or from accessing [peer VPC networks](#). Similarly, network access to VM workers from outside the subnetwork or peer VPC networks is prevented.

For more information about using the `--usePublicIps` pipeline option to specify whether workers should have only private IPs, see [Pipeline options](#).

## Developing your pipelines


The way that the code for your pipeline is implemented has a significant influence on how well the pipeline performs in production. In order to develop and deploy battle-tested code, we recommend the following:

- **Pipeline runners:** Use different Apache Beam runners to run pipeline code. The Apache Beam SDK provides a Direct Runner for local development and testing. You can use the Dataflow Runner for ad hoc development testing and for end-to-end pipeline tests.
- **Deployment environments:** Create deployment environments to separate users, data, code, and other resources across different stages of development. Run pipeline locally for development and rapid testing using the Direct Runner. Create a pre-production environment for development phases that need to run in production-like conditions, such as end-to-end testing. The production environment should be a dedicated Google Cloud project, where continuous delivery copies



deployment artifacts to the production environment when all end-to-end tests have passed.

- **Leverage open-source:** Apache Beam provides a rich set of pipeline examples in its directories for developers to copy from. The [Dataflow Cookbook](#) provides a library of transformations and common patterns in Java, Scala, Python, and Go. There are also guides for [common use-case patterns](#) found in our documentation. Google-provided [templates are open source](#) under the Apache License 2.0, so you can use them as the basis for new pipelines. The templates are also useful as code examples for reference.
- **Test pipeline code:** Use unit tests, integration tests, and end-to-end tests when applicable. The Apache Beam SDK provides functionality to enable these tests. The Apache Beam SDK provides functionality to enable these tests. Ideally, each type of test targets a different deployment environment. The following diagram illustrates how unit tests, integration tests, and end-to-end tests apply to different parts of your pipeline and data.

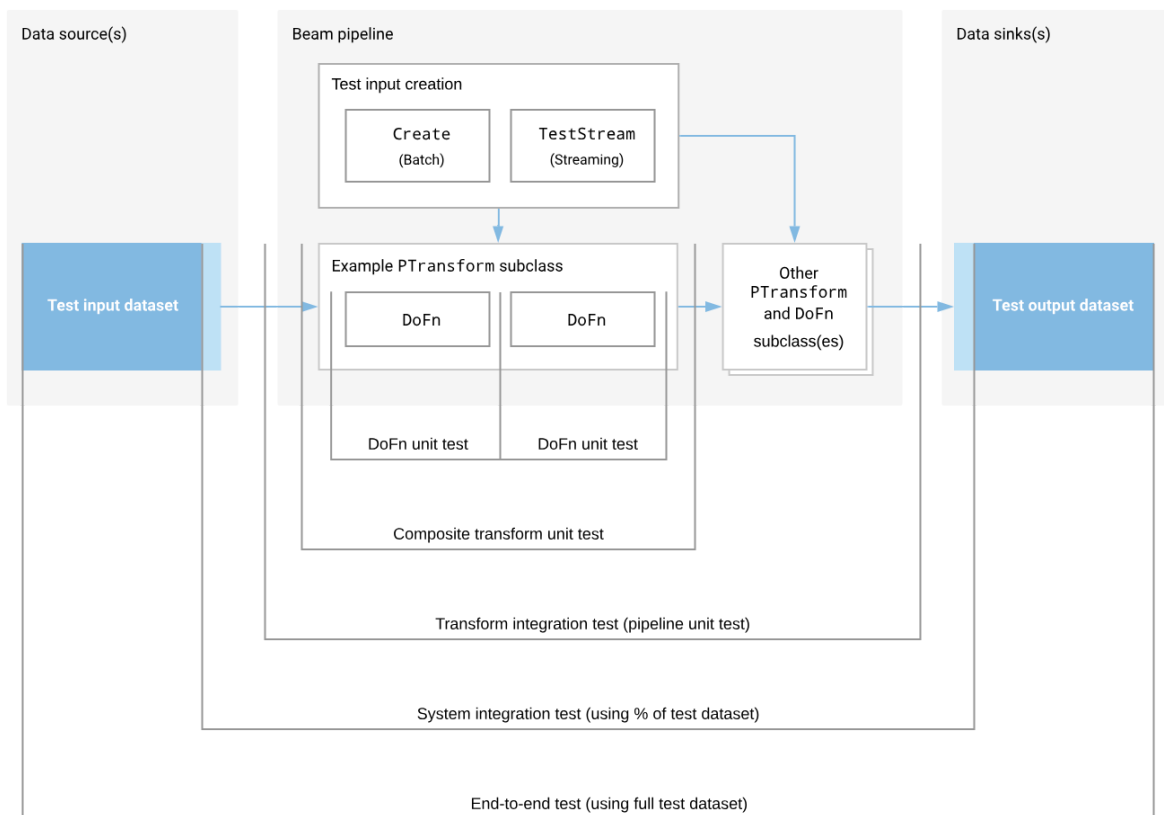

## Apache Beam best practices

In addition to the guidance listed above, Apache Beam and Dataflow provides features that complement these best practices for improved production readiness.

- **Leverage turnkey transforms:** Turnkey transformations provide a utility for developers to accomplish common business logic patterns in the convenience of a transform. These transformations abstract away unnecessary overhead that can take dozens, if not hundreds of lines, to manage.
  - **Enrichment:** When you enrich data, you augment the raw data from one source by adding related data from a second source. The additional data can come from a variety of sources, such as [Bigtable](#) or [BigQuery](#). The Apache Beam enrichment transform uses a key-value lookup to connect the additional data to the raw data.
  - **RunInference:** Users oftentimes needs to make a call for a prediction from an ML model stored externally to the pipeline. The RunInference API enables you to run models as part of your pipeline in a way that is optimized for machine learning inference. To reduce the number of steps in your pipeline, RunInference supports features like batching.
- **Micro-batch calls to external services:** When you call external services, you can reduce per-call overheads by using the GroupIntoBatches transform to create batches of elements of a specified size. Batching sends elements to an external service as one payload instead of individually. In combination with batching, you can limit the maximum number of parallel (concurrent) calls to the external service by choosing appropriate keys to partition the incoming data. The number of partitions determines the maximum parallelization. For example, if every element is given the same key, a downstream transform for calling the external service does not run in parallel.
- **Queue unprocessable data:** Your pipeline might encounter situations where it's not possible to process elements. This situation can occur for different reasons, but a common cause is data issues. use a pattern called a dead-letter queue (or dead-letter file). Catch exceptions in the DoFn.ProcessElement method and log errors as you normally would. Instead of dropping the failed element, use branching outputs to write failed elements into a separate PCollection object. These elements are then written to a data sink for later inspection and handling by using a separate transform.

## Deploying your pipelines

### Deployment

Pipeline development involves different stages and tasks, such as code development, testing, and delivery into production. Deploying a pipeline within a robust continuous integration & continuous delivery framework can ensure safe rollouts that do not introduce regressions.

The number and types of deployment artifacts created from a passing build varies depending on how pipelines are launched. Using the Apache Beam Java SDK, you can package your pipeline code [into a self-executing JAR file](#). You can then store the JAR file in a bucket that is

hosted in the project for a [deployment environment](#), such as the preproduction or production Google Cloud project. If you use Classic Templates (a type of [templated execution](#)), the deployment artifacts include a [JSON template file](#), the JAR file for your pipeline, and an [optional metadata template](#). You can then deploy the artifacts into different deployment environments using continuous delivery.


You can create a Dataflow job by using the Apache Beam SDK directly from a development environment. This type of job is called a non-templated job. Although this approach is convenient for developers, you might prefer to separate the tasks of developing and running pipelines. To make this separation, you can use [Dataflow templates](#), which allow you to stage and run your pipelines as independent tasks. After a template is staged, other users, including non-developers, can run the jobs from the template using the Google Cloud CLI, the Google Cloud console, or the Dataflow REST API.

## Reliability

It is important to consider the failures that might occur in the event of an outage. The following are a few principles to keep in mind:

- **Follow isolation principles:** A general recommendation to improve overall pipeline reliability is to follow the isolation principles behind [regions and zones](#). Ensure that your pipelines don't have critical cross-region dependencies. If you have a pipeline that has critical dependency on services from multiple regions, a failure in any one of those regions can impact your pipeline. To help avoid this issue, deploy to multiple regions for redundancy and backup.
- **Create Dataflow snapshots:** Dataflow offers a snapshot feature that provides a backup of a pipeline's state. You can restore the pipeline snapshot into a new streaming Dataflow pipeline in another zone or region. You can then start the reprocessing of messages in the Pub/Sub or Kafka topics starting at the snapshot timestamp. If you set up regular snapshots of your pipelines, you can minimize Recovery Time Objective (RTO) time.
- **Mitigate regional outages by using high availability or failover:** For streaming jobs, depending on the fault tolerance and budget for your application, you have different options for mitigating failures. For a regional outage, the simplest and most cost-effective option is to wait until the outage ends. However, if your application is latency-sensitive or if data processing must either not be disrupted or should be resumed with minimal delay, there are a couple of architectural options to consider:
  - *High-availability: Latency sensitive with no data loss:* If your application cannot tolerate data loss, run duplicate pipelines in parallel in two different regions, and have the pipelines consume the same data. The same data sources need to be available in both regions. The downstream applications that depend on

the output of these pipelines must be able to switch between the output from these two regions. Due to the duplication of resources, this option involves the highest cost compared to other options.

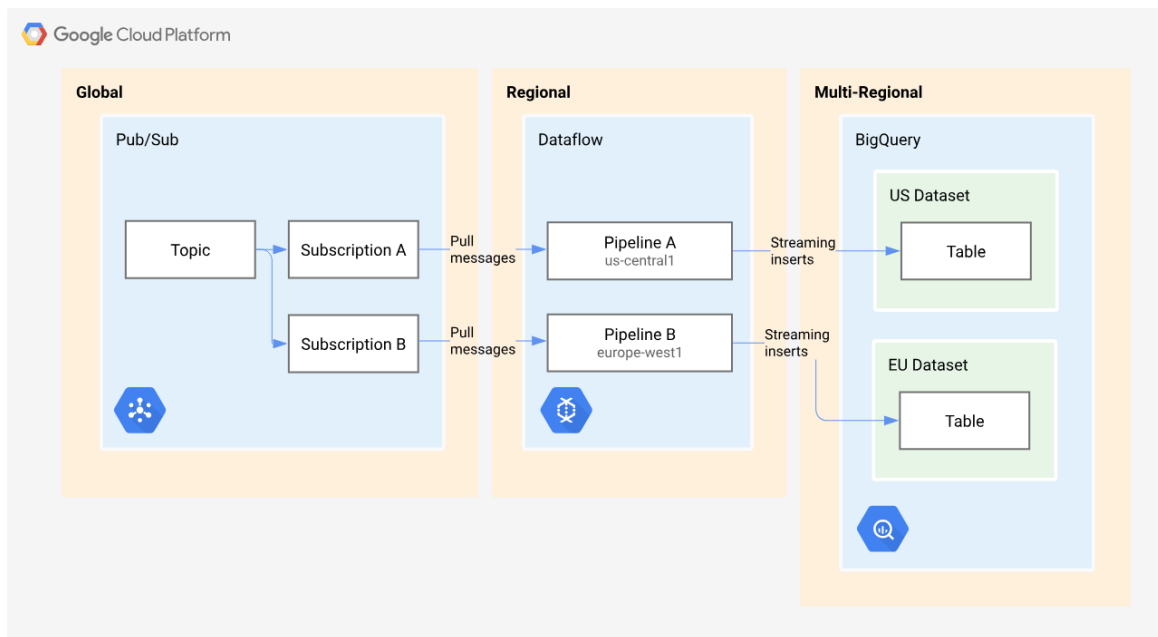

- *Failover: Latency-sensitive with some potential data loss:* If your application can tolerate potential data loss, make the streaming data source available in multiple regions. For example, using Pub/Sub, maintain two independent subscriptions for the same topic, one for each region. If a regional outage occurs, start a replacement pipeline in another region, and have the pipeline consume data from the backup subscription.
- **Don't store data in the broker for long periods of time:** There is no need to do that with Dataflow for increasing robustness. Dataflow ensures exactly once processing and will not pull data more than once from the broker. Dataflow can do live updates to ensure continuity without gaps.

## Operating your pipelines

### Monitoring

Cloud Monitoring provides powerful logging and diagnostics. Dataflow integration with Monitoring lets you access Dataflow job metrics such as job status, element counts, system lag (for streaming jobs), and user counters from the Monitoring dashboards. You can also use Monitoring alerts to notify you of various conditions, such as long streaming system lag or failed jobs.

A streaming pipeline is a service. Start by defining a SLI and SLO of what you want to achieve with this pipeline, as mentioned when we discussed planning your pipeline. Leverage Cloud Monitoring to measure the SLO automatically, and determine error budget and other properties without additional tooling needed.

To maintain a robust monitoring posture, the following best practices are recommended:

- **Setup relevant dashboards:** Dataflow publishes [a list of metrics](#) relevant to the performance of your pipeline. These include metrics describing resource utilization, data freshness, system latency, parallelism, and read/write throughput. Creating charts that are directly relevant to your SLOs and SLIs can simplify assessing the performance of your pipeline.
- **Inspect logs & insights:** Worker and job logs can indicate performance issues with your pipeline. Establish a practice of reviewing the diagnostics panel of the Dataflow monitoring UI, and review insights that can improve job performance, reduce cost, or troubleshoot errors.
- **Create alerts:** You can create an alerting policy directly from a metric chart. Creating alerts that align with your SLOs and SLIs can help your organization respond to a regression in your pipeline before a service outage.

## Performance

Echoing the guidance regarding defining SLOs and SLIs that are relevant to the key performance indicators that you care about, there are a number of considerations that should be taken into account when optimizing the performance of your pipeline. Delivering better performance for your pipeline (defined by either lower latency or higher efficiency – or both) can generally be done by carefully observing your pipeline in production into your pipeline implementation. The following list are recommended areas to identify for performance improvements (albeit not exhaustive):

- **Region, quotas, and networking:** Confirm that the pipeline is being run in the region where resources are located. Check if networking parameters permit adequate throughput for the pipeline.
- **Excessive data shuffling:** Stages where data is shuffled (i.e. when you are using GroupByKey, CoGroupByKey, or Stateful DoFns) are generally the most computationally expensive parts of a pipeline. These stages consume the most network bandwidth and if you are not using Streaming Engine or Shuffle, will likely add a meaningful amount of processing time to your pipeline. To mitigate against this, be intentional about the data that you are shuffling. Remove as many unused attributes as possible before you invoke a grouping transformations. When possible, use a combiner instead of a GroupByKey.

- **Limited parallelism:** Certain grouping operations might be slow, and you might see “hot key warnings” displayed in the UI. This is usually a result of a skew found in the distribution of the data, which will cause the overall processing to slow down. If possible, redesign the key partitioning or use combiners. Beam also provides several variations of “withHotKeyFanout” transformations to alleviate the ill effects of hot keys.
- **Batch External API calls:** As mentioned in the best practices section, you can reduce the impacts of making calls to external APIs by microbatching calls. Calling external APIs can sometimes be subjected to quotas that are not known to your pipeline, which can serve to slow down your own pipeline. Implement DoFn’s lifecycle methods (annotated with @Setup, @Startbundle), collect API requests in the @ProcessElement method, and call the API in the @FinishBundle method; or use GroupIntoBatches transform to create batches of certain sizes. It’s important to ensure that calls are idempotent, since bundles can be replayed.
- **IO Specific Recommendations:** Depending on your pipeline, review the best practices guides on IOs. Oftentimes, performance can be significantly constrained by settings configured at the source & sink.

## Cost Optimization

Being intentional about upholding performance best practices will generally result in the most cost-efficient pipelines. However, there are important steps to take when monitoring your pipeline costs, as well as configurations that can reduce your overall bill without coming at the expense of your requirements:

- **Monitor Dataflow costs & set alerts:** Enable billing export into BigQuery. This is the most efficient way of observing your Dataflow costs at the project level down to the pipeline and SKU level. Implement a labeling taxonomy using the best practices found [here](#), and add labels to [Dataflow jobs](#). For your critical pipelines, create [monitoring alerts](#) to do real-time notifications and cost control.
- **Number of workers:** Once you have a good sense for the data volume patterns of your pipeline, setting a maximum number of workers can limit any adverse traffic spikes that might cause your pipeline to overprovision workers. On the other hand, if you know that you have a baseline number of workers that you would like to maintain in order to guarantee uptime, you can set a minimum number of workers to ensure your processing doesn’t slow down during an autoscaling event.
- **At-least-once mode:** If your pipeline does not require exactly-once processing (i.e. deduplication can be handled in your sink or destination), you can configure your pipeline to run in at-least-once mode. At-least-once mode can help optimize cost and performance by turning off our exactly-once mode, which adds to pipeline latency &

cost due to the reading of metadata required to ensure we process a message no more than once.