Sprint 2 - Scrum Meeting 5 Script (QWERTY)

Wednesday 11 November 2026. Three-question format.

Meeting at a glance

Meeting 5 reports Days 8-9 (Monday 9 and Tuesday 10 November), 17 hours. US3b hours are complete and the story is In Review until this meeting's Definition of Done. US4a filters are 4 of 6 at the end of Day 8 and 6 of 6 at the end of Day 9, so this window closes the filter hours. The dashboard API is 5 of 5. Dashboard QA has not started. Activity API is 3 of 6. Each case below includes the command. Start the site (cd web, then npm run dev) and run the command from the repo root.

Item / Detail
Date / Wednesday 11 November 2026
Length / About 10 minutes
Facilitator / Napat Tayommai (Scrum Master)
Reports / Days 8-9, 17 hours (Pratanin 6, Jirathiwat 5, Sirapassorn 3, Sakkaraj 3)
Next / Friday 13 November, Meeting 6, the close (Days 10-14, 40 hours, Day 15 = 0)
Three questions / 1. Accomplished since Monday. 2. What will I do next? (test case number, name, expected output). 3. Blockers.

Before the meeting

1. Open docs/sprint-2-tdd-report.docx. Log Days 8-9 before anyone speaks.
2. US9a and US9b stay Done. Do not re-estimate them.
3. Demo: http://localhost:3000/dashboard and /notifications

The script

1. Opening (Napat, about 1 minute)

Good morning. This is Scrum meeting five, Wednesday 11 November. Monday we closed the two donor stories if DoD passed, and we left US3b in review. Days 8 and 9 were 17 hours: alerts UI and QA, the dashboard summary, and the start of driver activity. Tax export, GPS, and decay are still To-Do.

Pratanin, please start.

2. Pratanin, Dev 1 (about 1.5 minutes)

Accomplished: Day 8 was 4 hours and Day 9 was 2 hours, 6 hours in this window. US3b alerts page is now 4 of 4 and In Review. /notifications shows staff and driver rows. US4a filters moved from 2 of 6 to 6 of 6 (2 hours Monday, 2 hours Tuesday) and are In Review. The board filters by donor name, foodBankId, and status.

Next: Tests before the screens. Friday is the close.

- TC-US4b-03 Open /drivers. Expected: the driver name and the three counts are visible.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4b-driver-activity.py::test_tc_us4b_03_activity_page_fields -q

- TC-US5b-02 On /receipts, choose a month and Export CSV. Expected: a file download, not the Sprint 1 receipt PDF.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us5b-tax-export.py::test_tc_us5b_02_export_button_downloads_csv -q

- TC-US7-02 After a ping, /drivers shows latitude, longitude, and recordedAt in Asia/Bangkok.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us7-driver-ping.py::test_tc_us7_02_show_the_ping -q

The terminal picture shows PASSED for TC-US4b-03, TC-US5b-02, and TC-US7-02.

Blockers: None.

3. Napat to Jirathiwat

Thanks, Pratanin. Jirathiwat.

4. Jirathiwat, Dev 3 (about 1.5 minutes)

Accomplished: US4a GET /api/dashboard is 5 of 5 hours (Day 8 was 2, Day 9 was 3) and In Review. The JSON summary has open, matched, pickedUp, delivered, urgent, foodBanks, and notifications. Donors on the list are already limited to their own rows by the existing donations query.

Next: Day 10 is 0. Then tax and decay. Tests first.

- TC-US5b-01 GET /api/reports/tax?format=csv and format=pdf for a month. Expected: 200. This is not the US5a receipt.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us5b-tax-export.py::test_tc_us5b_01_tax_csv_and_pdf -q

- TC-US8-01 GET /api/decay?donationId=. Expected: hoursRemaining and riskScore.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us8-decay.py::test_tc_us8_01_decay_fields -q

- TC-US8-02 The same response. Expected: method is heuristic-spike.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us8-decay.py::test_tc_us8_02_label_the_spike -q

The terminal picture shows PASSED for TC-US5b-01, TC-US8-01, and TC-US8-02.

Blockers: None.

5. Napat to Sirapassorn

Thanks, Jirathiwat. Sirapassorn.

6. Sirapassorn, Dev 2 (about 1.5 minutes)

Accomplished: Day 8 was 0. Day 9 was 3 hours on US4b GET /api/drivers/activity, so the card is 3 of 6 and In Progress. The handler returns one object per driver user: counts, location from the latest ping, and runs sorted by delivered or picked-up time.

Next: Day 10 finishes the activity API. Days 12-13 are GPS. Tests first.

- TC-US4b-04 After delivery, delivered for usr-driver-1 is at least 1.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4b-driver-activity.py::test_tc_us4b_04_delivered_count -q

- TC-US7-01 POST /api/drivers/location with lat and lng. Expected: one ping for that driver, with recordedAt.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us7-driver-ping.py::test_tc_us7_01_store_a_ping -q

The terminal picture shows PASSED for TC-US4b-04 and TC-US7-01.

Blockers: None.

7. Napat to Sakkaraj

Thank you. Sakkaraj.

8. Sakkaraj, QA 1 (about 1.5 minutes)

Accomplished: US3b QA is 3 of 3 hours on Day 8 and In Review. A donation inside 24 hours creates one staff notification and one driver notification at threshold 24. Refresh does not insert a second pair. Day 9 was 0 hours. I have not tested the dashboard filters yet.

Next: These are the cases I run before Friday's close. Day 12 is 0.

- TC-US4a-05 Dashboard counts match the filtered rows. Expected: delivered count equals the delivered rows.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4a-dashboard.py::test_tc_us4a_05_counts_match_the_filter -q

- TC-US4b-05 After pickup and delivery, the activity row shows that donationId.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4b-driver-activity.py::test_tc_us4b_05_qa_after_pickup_and_delivery -q

- TC-US5b-03 CSV and PDF for the month both return 200 for the donor.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us5b-tax-export.py::test_tc_us5b_03_donor_receives_both_formats -q

- TC-US7-03 The ping on the activity log has lat, lng, and recordedAt.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us7-driver-ping.py::test_tc_us7_03_qa_ping_fields -q

- TC-US8-03 Decay returns hoursRemaining, riskScore, and method.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us8-decay.py::test_tc_us8_03_qa_decay_shape -q

The terminal picture shows PASSED for TC-US4a-05, TC-US4b-05, TC-US5b-03, TC-US7-03, and TC-US8-03.

Blockers: None.

9. Napat's own update (about 1 minute)

Accomplished: Days 8-9 are 17 hours. Running total 73 of 113.

Next: I only move US3b to Done if TC-US3b-01, TC-US3b-02, and TC-US3b-03 are Green in the TDD report. US4a stays open: TC-US4a-05 is still Red. Friday 13 is the close. There is no standup after that.

.\.venv\Scripts\python.exe -m pytest qa/api/test-us3b-expiry-alerts.py::test_tc_us3b_01_staff_alert_at_24_hours -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us3b-expiry-alerts.py::test_tc_us3b_02_driver_alert_at_the_same_threshold -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us3b-expiry-alerts.py::test_tc_us3b_03_no_duplicate_alert -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4a-dashboard.py::test_tc_us4a_05_counts_match_the_filter -q

Blockers: None.

10. Blocker and risk review (Napat, about 1 minute)

US5b must stay labeled Sprint 2 on the receipts page. It is not a Sprint 1 receipt. The US1a queue contract is unchanged. Anyone else?

11. Definition of Done check (Napat, about 1.5 minutes)

US3b, before Done: 24, 12, and 2 hour rows exist once, both audiences, the page renders them, no critical bugs, hours logged. If Sakkaraj confirms, move US3b to Done. Leave US4a In Review. Leave US4b In Progress at 3 of 6.

12. Closing (Napat, about 30 seconds)

Next standup is Friday 13 November, 09:00, Meeting 6, the Sprint 2 close. Thank you.

Example card positions

Card / Owner / Column
US9a, US9b / team / Done
US3b all tasks / team / Done, if this DoD passed
US4a filters (6/6) and API (5/5) / Pratanin, Jirathiwat / In Review
US4a QA (0/3) / Sakkaraj / To-Do
US4b activity API (3/6) / Sirapassorn / In Progress
US5b, US7, US8 / - / To-Do

Terminal evidence

Run on Friday 6 November 2026 against http://localhost:3000. The picture is the terminal. The code under it is the test that produced that result.

Pratanin

Command for each case in this picture:


.\.venv\Scripts\python.exe -m pytest qa/api/test-us4b-driver-activity.py::test_tc_us4b_03_activity_page_fields -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us5b-tax-export.py::test_tc_us5b_02_export_button_downloads_csv -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us7-driver-ping.py::test_tc_us7_02_show_the_ping -q

The picture is one run of those same tests:

.\.venv\Scripts\python.exe -m pytest -v --tb=line qa/api/test-us4b-driver-activity.py::test_tc_us4b_03_activity_page_fields qa/api/test-us5b-tax-export.py::test_tc_us5b_02_export_button_downloads_csv qa/api/test-us7-driver-ping.py::test_tc_us7_02_show_the_ping

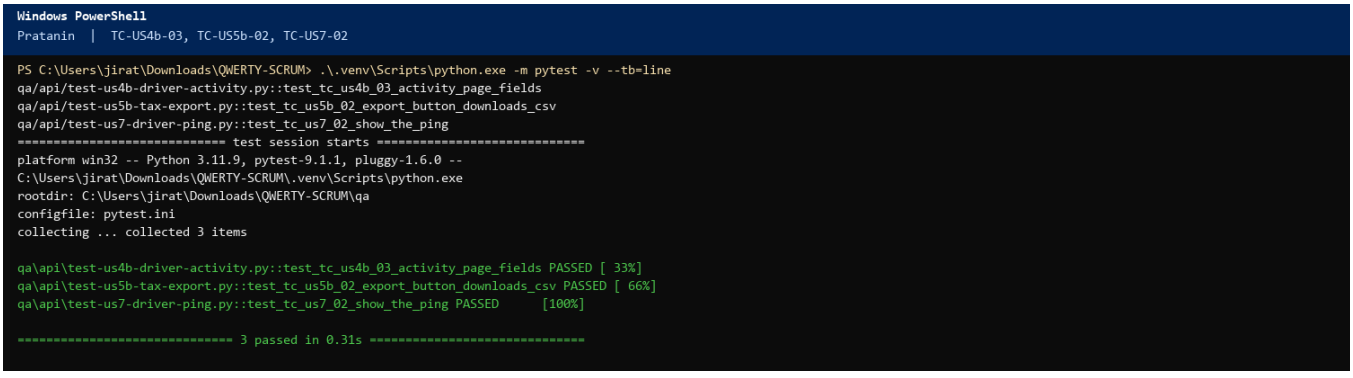

python
def test_tc_us4b_03_activity_page_fields():
    row = next(item for item in _activity() if item["driverId"] == "usr-driver-1")

```
    assert row["name"]
    assert isinstance(row["accepted"], int)
    assert isinstance(row["pickedUp"], int)
    assert isinstance(row["delivered"], int)

def test_tc_us5b_02_export_button_downloads_csv():
    month = datetime.now(timezone.utc).strftime("%Y-%m")
    response = donor().get(f"{BASE_URL}/api/reports/tax?format=csv&month={month}", timeout=10)
    assert response.status_code == 200
    assert "attachment" in response.headers.get("content-disposition", "")
    assert response.text.splitlines()[0].startswith("receiptId,donationId,foodType")

def test_tc_us7_02_show_the_ping():
                assert driver().post(f"{BASE_URL}/api/drivers/location", json={"lat": 13.76, "lng": 100.52}, timeout=10).status_code == 200
     row = next(item for item in foodbank().get(f"{BASE_URL}/api/drivers/activity", timeout=10).json()["drivers"] if item["driverId"] == "usr-driver-1")
    assert row["location"]["lat"] == 13.76
    assert row["location"]["lng"] == 100.52
    assert row["location"]["recordedAt"]
```

Jirathiwat

Command for each case in this picture:


.\.venv\Scripts\python.exe -m pytest qa/api/test-us5b-tax-export.py::test_tc_us5b_01_tax_csv_and_pdf -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us8-decay.py::test_tc_us8_01_decay_fields -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us8-decay.py::test_tc_us8_02_label_the_spike -q

The picture is one run of those same tests:

.\.venv\Scripts\python.exe -m pytest -v --tb=line qa/api/test-us5b-tax-export.py::test_tc_us5b_01_tax_csv_and_pdf qa/api/test-us8-decay.py::test_tc_us8_01_decay_fields qa/api/test-us8-decay.py::test_tc_us8_02_label_the_spike

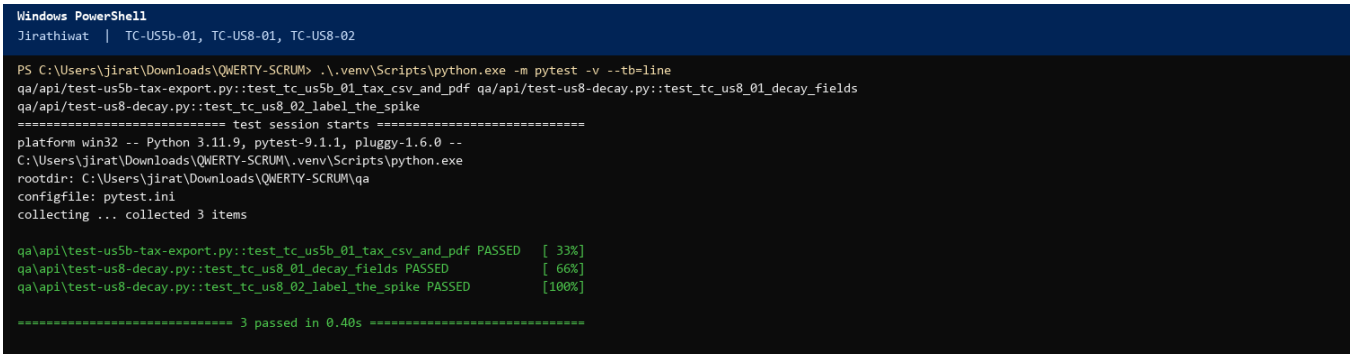

python

```
def test_tc_us5b_01_tax_csv_and_pdf():
    session = donor()
    month = datetime.now(timezone.utc).strftime("%Y-%m")
    csv_file = session.get(f"{BASE_URL}/api/reports/tax?format=csv&month={month}", timeout=10)
    pdf_file = session.get(f"{BASE_URL}/api/reports/tax?format=pdf&month={month}", timeout=10)
    assert csv_file.status_code == 200, csv_file.text
```

```
    assert pdf_file.status_code == 200
    assert "text/csv" in csv_file.headers["content-type"]
    assert "application/pdf" in pdf_file.headers["content-type"]

def test_tc_us8_01_decay_fields():
    donation_id = create_donation(donor(), quantity=2)["donation"]["donationId"]
                estimate = donor().get(f"{BASE_URL}/api/decay", params={"donationId": donation_id},
timeout=10).json()["estimate"]
    assert "hoursRemaining" in estimate
    assert "riskScore" in estimate

def test_tc_us8_02_label_the_spike():
    donation_id = create_donation(donor(), quantity=2)["donation"]["donationId"]
                estimate = donor().get(f"{BASE_URL}/api/decay", params={"donationId": donation_id},
timeout=10).json()["estimate"]
    assert estimate["method"] == "heuristic-spike"
```

Sirapassorn


Command for each case in this picture:

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4b-driver-activity.py::test_tc_us4b_04_delivered_count -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us7-driver-ping.py::test_tc_us7_01_store_a_ping -q

The picture is one run of those same tests:

.\.venv\Scripts\python.exe -m pytest -v --tb=line qa/api/test-us4b-driver-activity.py::test_tc_us4b_04_delivered_count qa/api/test-us7-driver-ping.py::test_tc_us7_01_store_a_ping

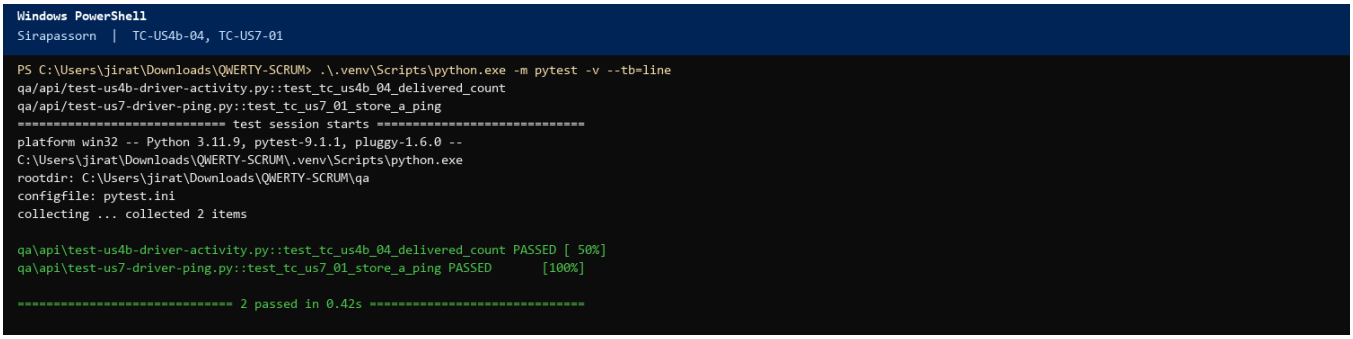


```
python
def test_tc_us4b_04_delivered_count():
    donation_id = create_donation(donor(), quantity=4)["donation"]["donationId"]
    driver_session = driver()
                assert driver_session.post(f"{BASE_URL}/api/pickup", json={"donationId": donation_id},
timeout=10).status_code == 200
    assert driver_session.post(
        f"{BASE_URL}/api/delivery",
        json={"donationId": donation_id, "proofKind": "signature", "proofDataUrl": PROOF},
        timeout=10,
    ).status_code == 200
    row = next(item for item in _activity() if item["driverId"] == "usr-driver-1")
    assert row["delivered"] >= 1

def test_tc_us7_01_store_a_ping():
```

```
    response = driver().post(f"{BASE_URL}/api/drivers/location", json={"lat": 13.75, "lng": 100.51}, timeout=10)
    assert response.status_code == 200, response.text
    ping = response.json()["location"]
    assert ping["driverId"] == "usr-driver-1"
    assert ping["lat"] == 13.75
    assert ping["lng"] == 100.51
    assert ping["recordedAt"]
```

Sakkaraj

Command for each case in this picture:

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4a-dashboard.py::test_tc_us4a_05_counts_match_the_filter -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us4b-driver-activity.py::test_tc_us4b_05_qa_after_pickup_and_delivery -q


.\.venv\Scripts\python.exe -m pytest qa/api/test-us5b-tax-export.py::test_tc_us5b_03_donor_receives_both_formats -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us7-driver-ping.py::test_tc_us7_03_qa_ping_fields -q

.\.venv\Scripts\python.exe -m pytest qa/api/test-us8-decay.py::test_tc_us8_03_qa_decay_shape -q

The picture is one run of those same tests:

.\.venv\Scripts\python.exe -m pytest -v --tb=line qa/api/test-us4a-dashboard.py::test_tc_us4a_05_counts_match_the_filter qa/api/test-us4b-driver-activity.py::test_tc_us4b_05_qa_after_pickup_and_delivery qa/api/test-us5b-tax-export.py::test_tc_us5b_03_donor_receives_both_formats qa/api/test-us7-driver-ping.py::test_tc_us7_03_qa_ping_fields qa/api/test-us8-decay.py::test_tc_us8_03_qa_decay_shape

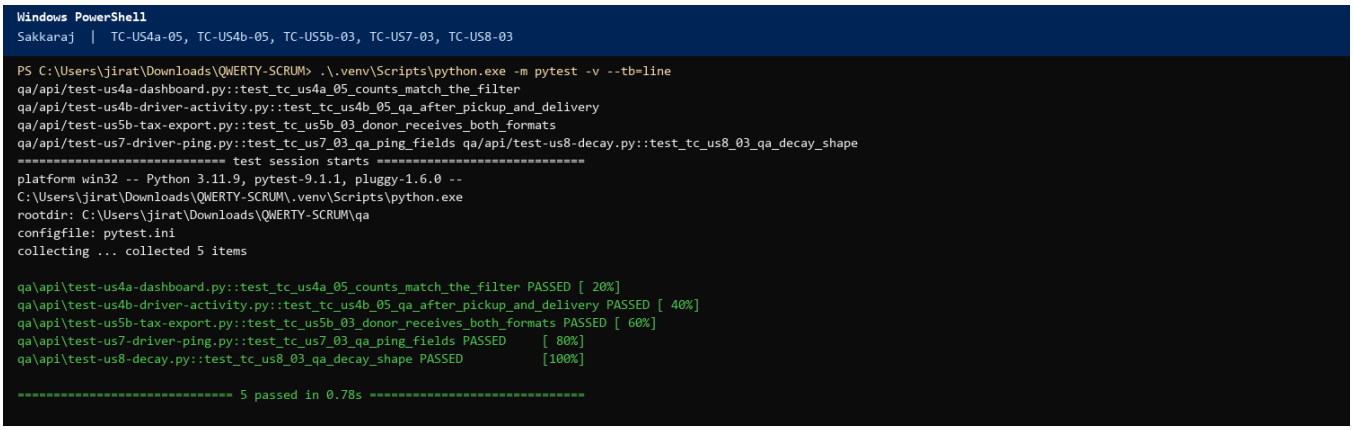

python

```
def test_tc_us4a_05_counts_match_the_filter():
    board = _board()
    delivered_rows = [item for item in board["donations"] if item["status"] == "delivered"]
    assert board["summary"]["delivered"] == len(delivered_rows)

def test_tc_us4b_05_qa_after_pickup_and_delivery():
    donation_id = create_donation(donor(), quantity=3)["donation"]["donationId"]
    driver_session = driver()
    assert driver_session.post(f"{BASE_URL}/api/pickup", json={"donationId": donation_id}, timeout=10).status_code == 200
```

```
    assert driver_session.post(
        f"{BASE_URL}/api/delivery",
        json={"donationId": donation_id, "proofKind": "signature", "proofDataUrl": PROOF},
        timeout=10,
    ).status_code == 200
    row = next(item for item in _activity() if item["driverId"] == "usr-driver-1")
    assert any(run["donationId"] == donation_id and run["status"] == "delivered" for run in row["runs"])

def test_tc_us5b_03_donor_receives_both_formats():
    session = donor()
    month = datetime.now(timezone.utc).strftime("%Y-%m")
     assert session.get(f"{BASE_URL}/api/reports/tax?format=csv&month={month}", timeout=10).status_code ==
200
     assert session.get(f"{BASE_URL}/api/reports/tax?format=pdf&month={month}", timeout=10).status_code ==
200

def test_tc_us7_03_qa_ping_fields():
                assert driver().post(f"{BASE_URL}/api/drivers/location", json={"lat": 13.77, "lng": 100.53},
timeout=10).status_code == 200
    locations = foodbank().get(f"{BASE_URL}/api/drivers/location", timeout=10).json()["locations"]
    ping = next(item for item in locations if item["driverId"] == "usr-driver-1")
    assert {"lat", "lng", "recordedAt"} <= set(ping)

def test_tc_us8_03_qa_decay_shape():
    donation_id = create_donation(donor(), quantity=2)["donation"]["donationId"]
                estimate = donor().get(f"{BASE_URL}/api/decay", params={"donationId": donation_id},
timeout=10).json()["estimate"]
    assert estimate["donationId"] == donation_id
    assert {"hoursRemaining", "riskScore", "method"} <= set(estimate)
```