



## **Placement Empowerment Program**

### ***Cloud Computing and DevOps Centre***

Set Up a Load Balancer in the Cloud Configure a load balancer to distribute traffic across multiple VMs hosting your web application.

Name: Gopinath M

Department: ADS

# Introduction

In this Proof of Concept (POC), the focus is on setting up a cloud based Load Balancer using AWS to distribute traffic across multiple virtual machines (EC2 instances). Load Balancers play a crucial role in modern cloud architectures by ensuring high availability, fault tolerance, and scalability for web applications. This POC demonstrates the basic setup of an AWS Load Balancer, allowing traffic to be distributed between two EC2 instances running simple web servers.

## Overview

The POC covers the following:

1. **Creating EC2 Instances:** Setting up two virtual machines (WebServer1 and WebServer2) in the AWS Free Tier.
2. **Configuring Web Servers:** Installing and configuring Apache HTTP Server on each instance to host simple HTML web pages.
3. **Setting Up a Load Balancer:** Creating an Application Load Balancer (ALB) to distribute incoming traffic evenly between the two EC2 instances.
4. **Testing the Load Balancer:** Verifying that the Load Balancer works by checking the DNS name and ensuring it alternates traffic between the two servers.

# Objectives

1. To understand the process of creating and configuring EC2 instances in AWS.
2. To install and configure a web server (Apache HTTP Server) on Linux-based EC2 instances.
3. To set up an Application Load Balancer to distribute traffic across multiple servers.
4. To validate that the Load Balancer works as intended by testing it with unique responses from each server.
5. To build a foundational understanding of cloud-based load balancing for real-world use cases.

# Importance

- 1. Scalability:** Demonstrates how load balancing allows scaling applications by adding or removing servers as traffic demands change.
- 2. Fault Tolerance:** Ensures that if one server goes down, the Load Balancer redirects traffic to the healthy server, improving reliability.
- 3. Cost Efficiency:** Explores how to leverage AWS Free Tier services to test and deploy cloud-based solutions with minimal cost.
- 4. Hands-On Experience:** Provides practical experience in configuring essential AWS services, an important skill for cloud computing professionals.

- 5. Foundation for Advanced Concepts:** Sets the stage for more complex setups, such as auto-scaling, secure traffic distribution, and monitoring solutions.

## Step-by-Step Overview Step

1:

1. Go to [AWS Management Console](#).
2. Enter your username and password to log in.


### Step 2:

To create your instances, click **Launch Instance** and fill in the details: name the first instance "WebServer1," select **Amazon Linux 2 AMI (Free Tier eligible)** as the OS, and choose the **t2.micro** instance type. For the Key Pair, either select an existing one or create a new key pair to use for SSH access. Under **Network Settings**, click "Edit" and ensure "Allow HTTP traffic from the internet" is checked to enable web traffic. Keep the storage size at the default 8 GB, then click **Launch Instance**. Repeat the same steps for the second instance, naming it "WebServer2."

### Step 3:

Click on **WebServer1**, then click **Connect**.

Use the instructions under **SSH client** to connect to your instance via terminal.

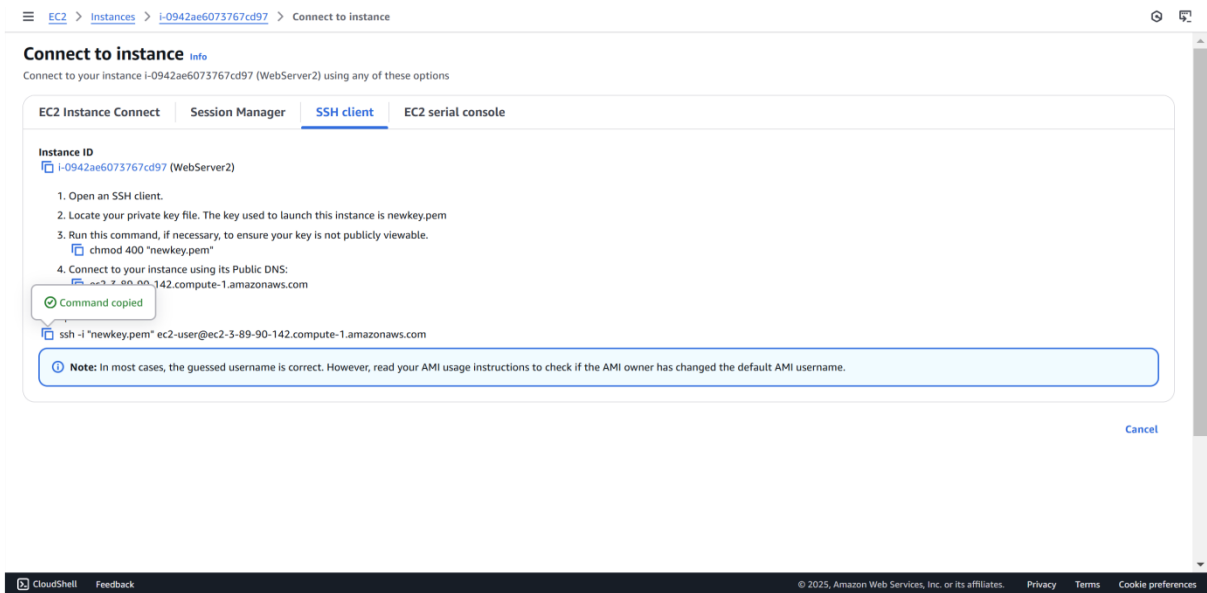

## Step 3:

Run the following commands to install and start a web server

```
PS C:\Users\Hi> cd downloads
PS C:\Users\Hi\downloads> ssh -i "newkey.pem" ec2-user@ec2-54-158-83-143.compute-1.amazonaws.com
```

```
[ec2-user@ip-172-31-92-205 ~]$ sudo yum update -y
```

```
[ec2-user@ip-172-31-92-205 ~]$ sudo yum install httpd -y
```

```
[ec2-user@ip-172-31-92-205 ~]$ sudo systemctl start httpd
[ec2-user@ip-172-31-92-205 ~]$ sudo systemctl enable httpd
```

```
[ec2-user@ip-172-31-92-205 ~]$ echo "Hello from WebServer1!" | sudo tee /var/www/html/index.html
Hello from WebServer1!
```

```
[ec2-user@ip-172-31-92-205 ~]$ exit
```

## Step 4:


Repeat these steps for **WebServer2** but change the message in the last command to:

```
PS C:\Users\Hi\downloads> ssh -i "newkey.pem" ec2-user@ec2-3-89-90-142.compute-1.amazonaws.com
```

```
[ec2-user@ip-172-31-95-133 ~]$ echo "Hello from WebServer2!" | sudo tee /var/www/html/index.html
Hello from WebServer2!
```

## Step 5:

1. In the **AWS Management Console**, go to the **EC2 Dashboard**.
2. Scroll down and click on **Target Groups** under "Load Balancing."
3. Click **Create Target Group**.

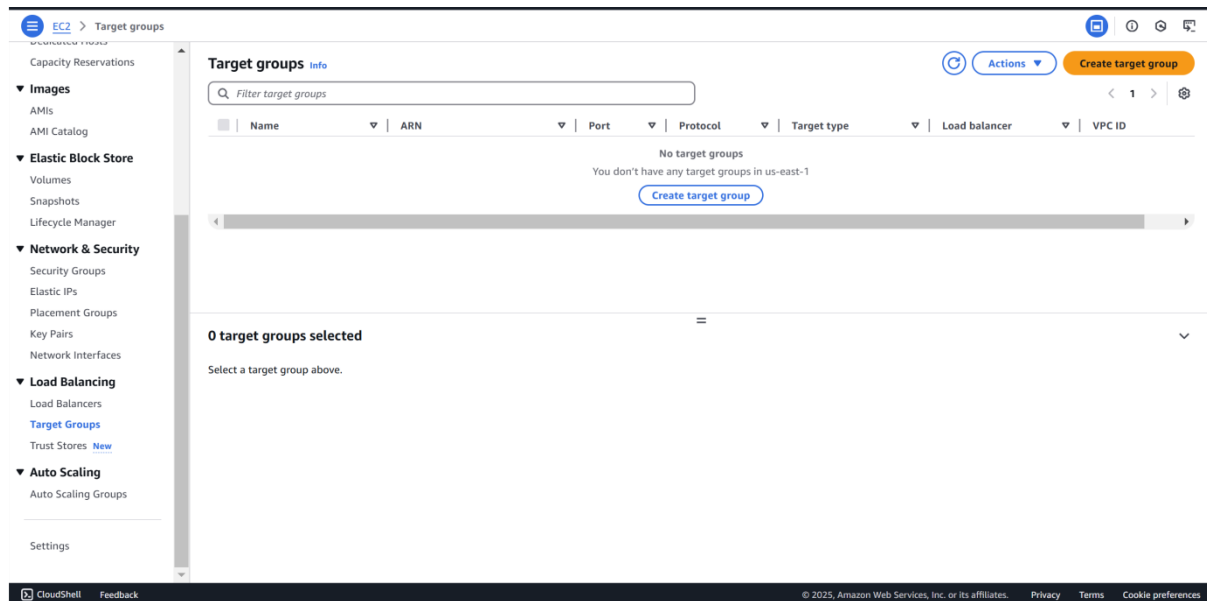

## Step 6:

To create a target group, select **Instances** as the target type, name it (e.g., "MyTargetGroup"), set the **Protocol** to HTTP and **Port** to 80, and choose the same VPC as your EC2 instances (usually the default VPC). Keep the **Health Check Path** as / to verify the web server's status. Click **Next**, select both WebServer1 and WebServer2 under "Register Targets," click **Include as pending below**, and then create the target group.

EC2 > Target groups > Create target group

Step 1  
Specify group details

Step 2  
Register targets

### Register targets

This is an optional step to create a target group. However, to ensure that your load balancer routes traffic to this target group you must register your targets.

#### Available instances (2/2)

Filter instances

<input checked="" type="checkbox"/>	Instance ID	Name	State	Security groups	Zone
<input checked="" type="checkbox"/>	i-0942ae6073767cd97	WebServer2	Running	launch-wizard-24	us-east-1a
<input checked="" type="checkbox"/>	i-0038e65e8e8ecc9d1	WebServer1	Running	launch-wizard-23	us-east-1a

2 selected

**Ports for the selected instances**  
Ports for routing traffic to the selected instances.  
  
1-65535 (separate multiple ports with comma)  
Include as pending below

2 selections are now pending below. Include more or register targets when ready.

#### Review targets

Targets (2)

Remove all pending

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

EC2 > Target groups > Create target group

### Target group details

**Target group name**  
  
A maximum of 32 alphanumeric characters including hyphens are allowed, but the name must not begin or end with a hyphen.

**Protocol : Port**  
Choose a protocol for your target group that corresponds to the Load Balancer type that will route traffic to it. Some protocols now include anomaly detection for the targets and you can set mitigation options once your target group is created. This choice cannot be changed after creation.  

HTTP

1-65535

**IP address type**  
Only targets with the indicated IP address type can be registered to this target group.  

☒ **IPv4**  
Each instance has a default network interface (eth0) that is assigned the primary private (IPv4) address. The instance's primary private (IPv4) address is the one that will be applied to the target.

☐ **IPv6**  
Each instance you register must have an assigned primary IPv6 address. This is configured on the instance's default network interface (eth0).  
[Learn more](#)

**VPC**  
Select the VPC with the instances that you want to include in the target group. Only VPCs that support the IP address type selected above are available in this list.  

vpc-0f36f0944c12862e5  
IPv4 VPC CIDR: 172.31.0.0/16

**Protocol version**  

☒ **HTTP1**  
Send requests to targets using HTTP/1.1. Supported when the request protocol is HTTP/1.1 or HTTP/2.

☐ **HTTP2**  
Send requests to targets using HTTP/2. Supported when the request protocol is HTTP/2 or gRPC, but gRPC-specific features are not available.

☐ **gRPC**  
Send requests to targets using gRPC. Supported when the request protocol is gRPC.

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

EC2 > Target groups > MyTargetGroup

Capacity Reservations

Images

- AMIs
- AMI Catalog

Elastic Block Store

- Volumes
- Snapshots
- Lifecycle Manager

Network & Security

- Security Groups
- Elastic IPs
- Placement Groups
- Key Pairs
- Network Interfaces

Load Balancing

- Load Balancers
- Target Groups
- Trust Stores [New](#)

Auto Scaling

- Auto Scaling Groups

Settings

Successfully created the target group: **MyTargetGroup**. Anomaly detection is automatically applied to all registered targets. Results can be viewed in the **Targets** tab.

**MyTargetGroup** [Actions](#)

#### Details

aws:elasticloadbalancing:us-east-1:343218194491:targetgroup/MyTargetGroup/6bd53aaf1f271dd6

**Target type**  
Instance

**Protocol : Port**  
HTTP: 80

**Protocol version**  
HTTP1

**VPC**  
[vpc-0f36f0944c12862e5](#)

**IP address type**  
IPv4

**Load balancer**  
[None associated](#)

2  
Total targets

0  
Healthy

0  
Unhealthy

2  
Unused

0  
Initial

0  
Draining

**Distribution of targets by Availability Zone (AZ)**  
Select values in this table to see corresponding filters applied to the Registered targets table below.

Targets

MonitoringHealth checksAttributesTags

**Registered targets (2)** [info](#)

Anomaly mitigation: **Not applicable**


[Deregister](#) [Register targets](#)

Target groups route requests to individual registered targets using the protocol and port number specified. Health checks are performed on all registered targets according to the target group's health check settings. Anomaly detection is automatically applied to HTTP/HTTPS target groups with at least 3 healthy targets.


CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

## Step 7:

In the EC2 Dashboard, go to **Load Balancers** under "Load Balancing" and click **Create Load Balancer**. Select **Application Load Balancer (free tier eligible)** and configure it: name it (e.g., "MyALB"), set the **Scheme** to Internet-facing, **IP Address Type** to IPv4, and ensure the listener is HTTP on port 80. Select the VPC and at least two subnets for high availability. Skip the security settings since this is HTTP. On the **Security Groups** page, choose or create a security group that allows HTTP traffic. On the **Routing** page, select the previously created target group (e.g., "MyTargetGroup") and click **Create Load Balancer**.

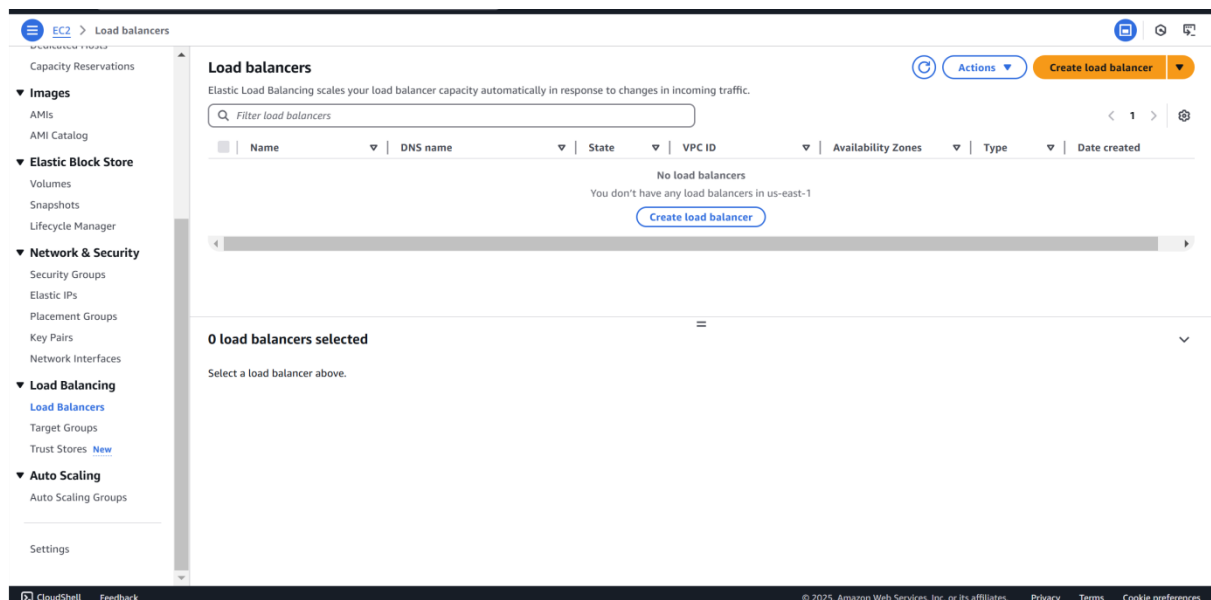



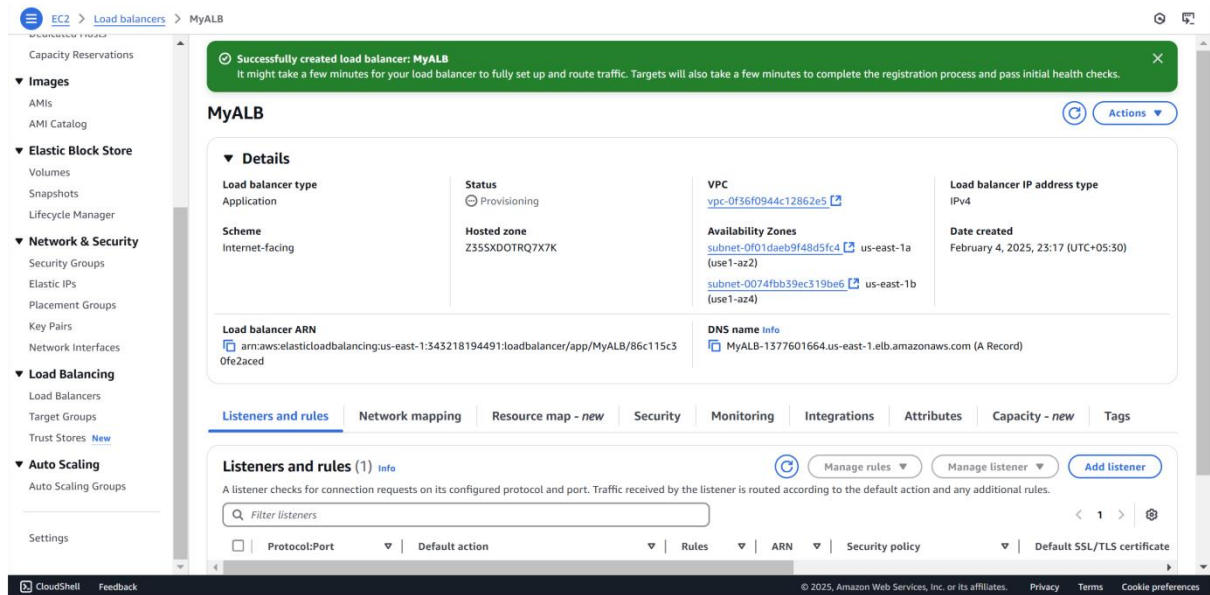

## Step 8:

To verify the functionality of your Load Balancer:

1. Go to the **Load Balancers** section in the AWS Management Console.
2. Select your Load Balancer and find its **DNS name** under the **Description** tab.
3. Copy the DNS name and open it in your browser.
4. Refresh the page to confirm that traffic is being alternated between the two EC2 instances. You should see the messages **"Hello from WebServer1!"** and **"Hello from WebServer2!"** displayed alternately.

This confirms that the Load Balancer is correctly distributing traffic and ensuring high availability.

# Outcome

By completing this POC of setting up an Application Load Balancer in AWS, you will:

1. Launch and configure two EC2 instances with Amazon Linux 2, each hosting a simple web server with unique content.
2. Create and configure an Application Load Balancer to distribute incoming traffic between the two EC2 instances.
3. Verify the functionality of the Load Balancer by accessing the DNS name and observing traffic alternation between the two web servers.
4. Understand the importance of Load Balancers in ensuring high availability and fault tolerance for web applications.