

50%
OFF

[In-Demand Coding Courses](#)
at 50% Off! [Claim Discount](#)

(https://programiz.pro/offer/bts-sale?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=bts-sale_top-50%OFF)


[Programiz PRO](#) (https://programiz.pro?utm_source=left-floating-block&utm_campaign=programiz&utm_medium=referral)
www.domain-name.com

HTML Iframes

The HTML `<iframe>` tag is used to embed a webpage within a webpage. It is also called an inline frame. For example,

```
<iframe src="https://programiz.pro" title="programiz pro">
```

Browser Output

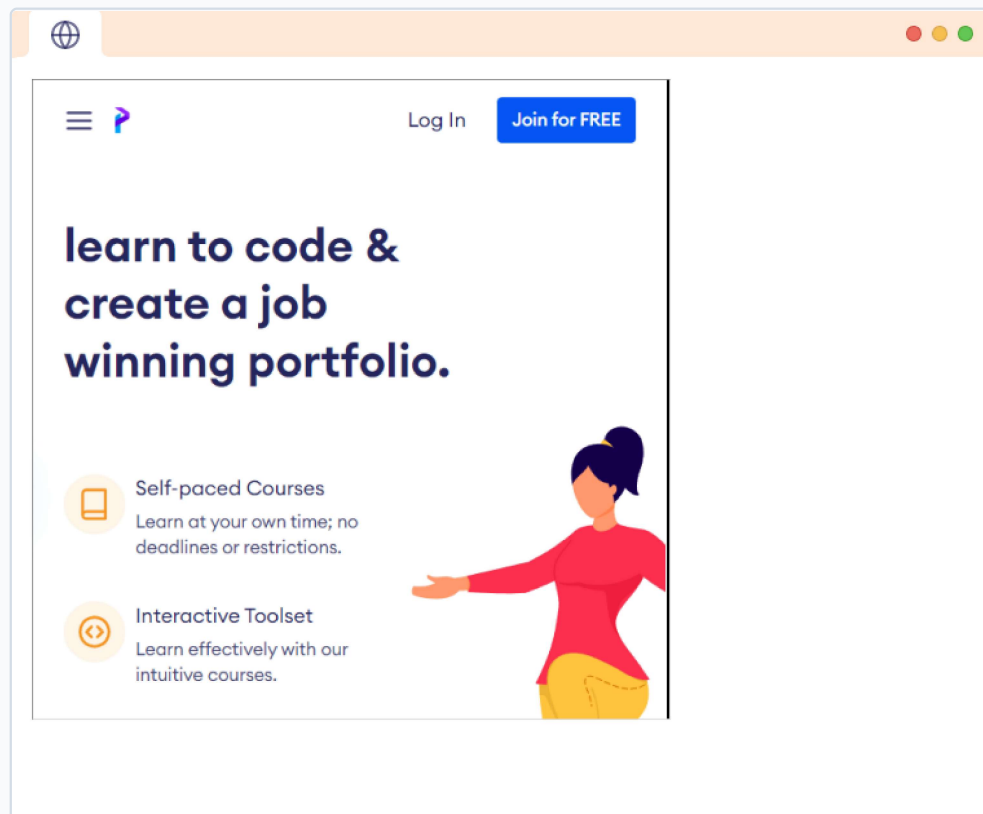

50%
OFF

[In-Demand Coding Courses](#)
at 50% Off! [Claim Discount](#)

(https://programiz.pro/offer/bts-sale?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=bts-sale_top-

[Programiz PRO](#) (https://programiz.pro?utm_source=left-floating-block&utm_campaign=programiz&utm_medium=referral)

www.domain-name.com

Other Attributes for <iframe>

There are some important attributes for `<iframe>`. They are:

- height and width
- name
- srcdoc

We will explore each of them in detail.

height and width

We can set the height and width of the `<iframe>` element with the `height` or `width` attribute. For example,

```
<iframe src="https://programiz.pro" height="200" width="300">
```

We can also use CSS to set the width and height of the `<iframe>` using the `style` attribute. For example,

```
<iframe src="https://programiz.pro" style="height:200px; width:300px;">
```

Thank you for printing our content at www.domain-name.com. Please check back soon for new contents.

50%
OFF

[In-Demand Coding Courses](#)
at 50% Off! [Claim Discount](#)

(https://programiz.pro/offer/bts-sale?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=bts-sale_top-

[Programiz PRO](#) (https://programiz.pro?utm_source=left-floating-block&utm_campaign=programiz&utm_medium=referral)

www.domain-name.com

name



The `name` attribute is used to specify the name for an `iframe`. It can be used as a target for other HTML elements like the `<a>` tag. For example,

```
<iframe src="https://parewalabs.com" name="iframe_target">
<a href="https://www.programiz.pro" target="iframe_target">
```

Browser Output (Before Clicking the link)

Thank you for printing our content at www.domain-name.com. Please check back soon for new contents.

50%
OFF

[In-Demand Coding Courses](#)
at 50% Off! [Claim Discount](#)

(https://programiz.pro/offer/bts-sale?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=bts-sale_top-


[Programiz PRO](#) (https://programiz.pro?utm_source=left-floating-block&utm_campaign=programiz&utm_medium=referral)

www.domain-name.com



[Switch to Programiz Pro](#)

Browser Output (After clicking the link)

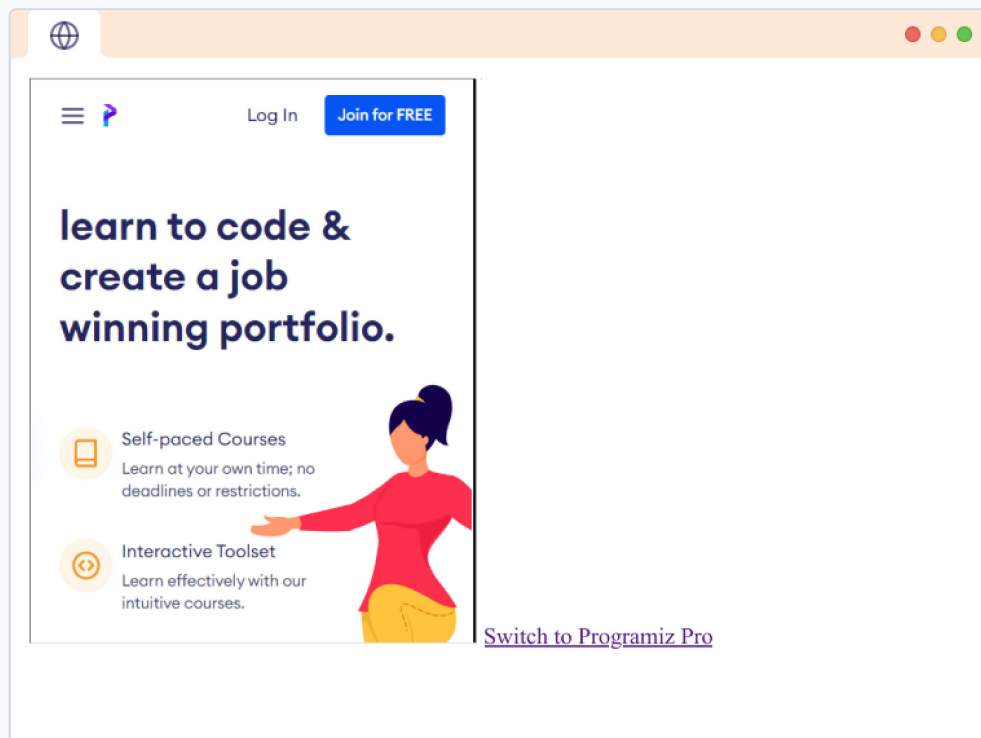

Here, clicking the `<a>` tag changes the URL of the target instead of the current window.

Thank you for printing our content at www.domain-name.com. Please check back soon for new contents.

**50%
OFF**

[In-Demand Coding Courses](#)
at 50% Off! [Claim Discount](#)

(https://programiz.pro/offer/bts-sale?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=bts-sale_top-

[Programiz PRO](#) (https://programiz.pro?utm_source=left-floating-block&utm_campaign=programiz&utm_medium=referral)

www.domain-name.com

```
<iframe srcdoc="<h1>Learn to code</h1>"></iframe>
```

Browser Output



[Next Tutorial:](#)
[HTML Entities](#) → (</html/entities>)

[Previous Tutorial:](#)
[HTML Canvas](#) (</html/canvas>)

50%
OFF

[In-Demand Coding Courses](#)
at 50% Off! [Claim Discount](#)

([https://programiz.pro/offer/bts-sale?utm_source=top-
banner-programiz-
web&utm_medium=banner&utm_campaign=bts-sale__top-](https://programiz.pro/offer/bts-sale?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=bts-sale__top-)

[Programiz](#) ([https://programiz.pro?utm_source=left-floating-
block&utm_campaign=programiz&utm_medium=referral](https://programiz.pro?utm_source=left-floating-block&utm_campaign=programiz&utm_medium=referral))

www.domain-name.com