
Cucumber Report

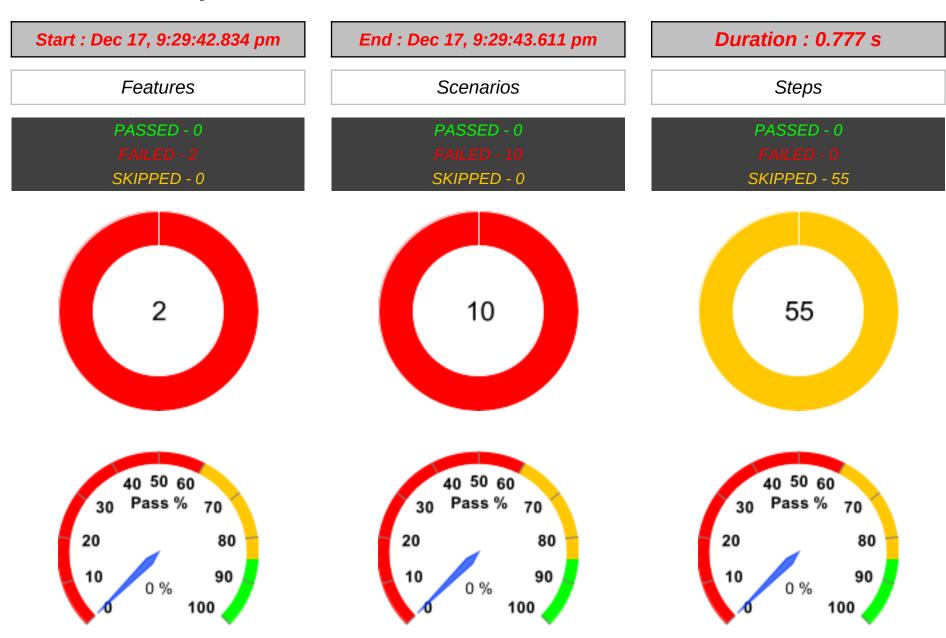


| Feature | | | Scer | nario | | | St | ер | |
|--|----------|---|------|-------|---|----------|----|----|----|
| Name | Duration | T | P | F | S | T | P | F | S |
| Login Feature | 0.364 s | 4 | 0 | 4 | 0 | 23 | 0 | 0 | 23 |
| As a user, I should be able to register successfully | 0.369 s | 6 | 0 | 6 | 0 | 32 | 0 | 0 | 32 |

FAIL & SKIP SCENARIOS -- 3 --

| # | Feature Name | Scenario Name |
|----|--|---|
| 1 | Login Feature | userShouldNavigateToLoginPageSuccessFully |
| 2 | | Verify the error message with invalid credentials |
| 3 | | verifyThatUserShouldLogInSuccessFullyWithValidCredentials |
| 4 | | VerifyThatUserShouldLogOutSuccessFully |
| 5 | As a user, I should be able to register successfully | VerifyUserShouldNavigateToRegisterPageSuccessfully |
| 6 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmPasswordFields- AreMandatory |
| 7 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmPasswordFields- AreMandatory |
| 8 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmPasswordFields- AreMandatory |
| 9 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmPasswordFields- AreMandatory |
| 10 | | <u>VerifyThatUserShouldCreateAccountSuccessfully</u> |


| TAG | | Scei | nario | | | Fea | ture | |
|----------------|----|------|-------|---|---|-----|------|---|
| Name | T | P | F | S | T | P | F | S |
| @smoke | 7 | 0 | 7 | 0 | 2 | 0 | 2 | 0 |
| @regression | 10 | 0 | 10 | 0 | 2 | 0 | 2 | 0 |
| @author_Amruta | 2 | 0 | 2 | 0 | 1 | 0 | 1 | 0 |
| @sanity | 2 | 0 | 2 | 0 | 2 | 0 | 2 | 0 |
| @author_AG | 8 | 0 | 8 | 0 | 2 | 0 | 2 | 0 |

FEATURES SUMMARY

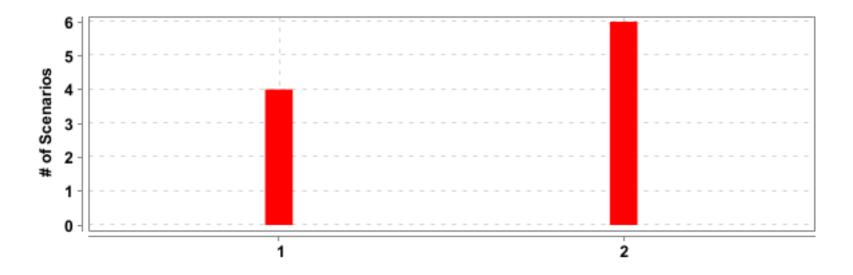


| # | Feature Name | T | P | F | S | Duration |
|---|--|---|---|---|---|----------|
| 1 | Login Feature | 4 | 0 | 4 | 0 | 0.364 s |
| 2 | As a user, I should be able to register successfully | 6 | 0 | 6 | 0 | 0.369 s |

SCENARIOS SUMMARY -- 6 --

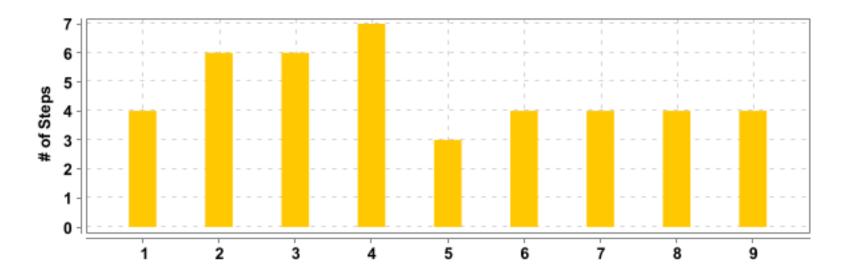

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--|---|---|---|---|---|----------|
| 1 | Login Feature | userShouldNavigateToLoginPageSuccessFully | 4 | 0 | 0 | 4 | 0.089 s |
| 2 | | Verify the error message with invalid credentials | 6 | 0 | 0 | 6 | 0.038 s |
| 3 | | verifyThatUserShouldLogInSuccessFullyWithValidCredentia- ls | 6 | 0 | 0 | 6 | 0.039 s |
| 4 | | VerifyThatUserShouldLogOutSuccessFully | 7 | 0 | 0 | 7 | 0.036 s |
| 5 | As a user, I should be able to register successfully | <u>VerifyUserShouldNavigateToRegisterPageSuccessfully</u> | 3 | 0 | 0 | 3 | 0.014 s |
| 6 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmP-asswordFieldsAreMandatory | 4 | 0 | 0 | 4 | 0.022 s |
| 7 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmP-asswordFieldsAreMandatory | 4 | 0 | 0 | 4 | 0.034 s |
| 8 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmP-asswordFieldsAreMandatory | 4 | 0 | 0 | 4 | 0.018 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--------------|---|---|---|---|---|----------|
| 9 | | VerifyThatFirstNameLastNameEmailPasswordAndConfirmP- asswordFieldsAreMandatory | 4 | 0 | 0 | 4 | 0.030 s |

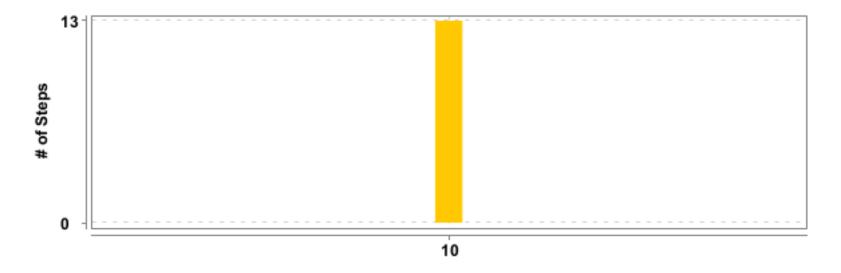


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|--|----|---|---|----|----------|
| 10 | As a user, I should be able to register successfully | <u>VerifyThatUserShouldCreateAccountSuccessfully</u> | 13 | 0 | 0 | 13 | 0.032 s |

DETAILED SECTION -- 9 --

Login Feature

| FAILED | DURATION - 0.364 s | Scenarios | | Steps | |
|-------------------------|--------------------|-----------|---|------------|----|
| | | Total - 4 | | Total - 23 | |
| / 9:29:42.834 pm // 9:2 | 29:43.198 pm / | Pass - 0 | 4 | Pass - 0 | 23 |
| | | Fail - 4 | | Fail - 0 | |
| | | Skip - 0 | | Skip - 23 | |

userShouldNavigateToLoginPageSuccessFully

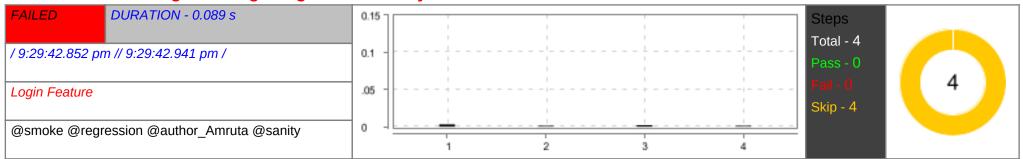

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.028 s |
| | java.lang.ExceptionInInitializerError | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.NumberFormatException: Cannot parse null string | | |
| | at java.base/java.lang.Integer.parseInt(Integer.java:630) | | |
| | at java.base/java.lang.Integer.parseInt(Integer.java:786) | | |
| | at com.nopcommerce.demo.browserfactory.ManageBrowser. <clinit>(ManageBrowser.java:20)</clinit> | | |
| 1 | Given I am on homepage | SKIPPED | 0.003 s |
| 2 | When I click on login link | SKIPPED | 0.001 s |
| 3 | Then Navigate to LoginPage | SKIPPED | 0.002 s |


DETAILED SECTION -- 11 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 4 | And verify that "Welcome, Please Sign In!" message is display | SKIPPED | 0.001 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.004 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |

DETAILED SECTION -- 12 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

Verify the error message with invalid credentials

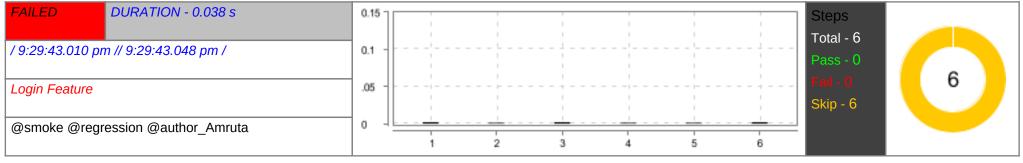

| Step / Hook Details | Status | Duration |
|--|--------|----------|
| BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.005 s |
| java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| at org.testng.TestRunner.run(TestRunner.java:621) | | |
| at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | OLUBBER | 0.000 |
| 1 | Given I am on homepage | SKIPPED | 0.002 s |
| 2 | When I click on login link | SKIPPED | 0.001 s |
| 3 | And I enter email "kujanpatel@gmail.com" | SKIPPED | 0.002 s |
| 4 | And I enter password "kunjan1" | SKIPPED | 0.001 s |
| 5 | And I click on login button | SKIPPED | 0.001 s |
| 6 | Then I should see the error message | SKIPPED | 0.002 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.004 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.executeStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |

DETAILED SECTION -- 16 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

verify That User Should Log In Success Fully With Valid Credentials

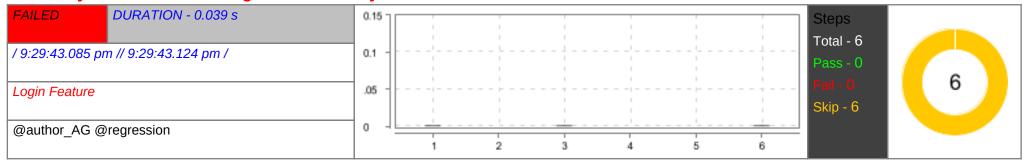


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.012 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | $at\ io. cucumber. core. runtime. Cucumber Execution Context.run Test Case (Cucumber Execution Context.java: 137)$ | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runlnSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:1911) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testing.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 1 | Given I am on homepage | SKIPPED | 0.001 s |
| 2 | When I click on login link | SKIPPED | 0.000 s |
| 3 | And I enter email "kunjanpatel@gmail.com" | SKIPPED | 0.001 s |
| 4 | And I enter password "kunjan16" | SKIPPED | 0.000 s |
| 5 | And I click on login button | SKIPPED | 0.000 s |
| 6 | Then Verify that LogOut link is display | SKIPPED | 0.001 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.005 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

Verify That User Should Log Out Success Fully

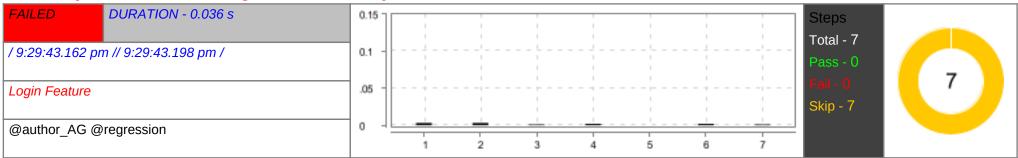

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.002 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.Delegating Constructor Accessor Impl.new Instance (Delegating Constructor Accessor Impl.java: 45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | $at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$ | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |

DETAILED SECTION -- 21 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testing. Festivg.runSuitesSequentially(Testivg.java.1200) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 1 | Given I am on homepage | SKIPPED | 0.003 s |
| 2 | When I click on login link | SKIPPED | 0.003 s |
| 3 | And I enter email "kunjanpatel@gmail.com" | SKIPPED | 0.001 s |
| 4 | And I enter password "kunjan16" | SKIPPED | 0.002 s |
| 5 | And I click on login button | SKIPPED | 0.000 s |
| 6 | And Click on LogOut Link | SKIPPED | 0.002 s |
| 7 | Then Verify that LogIn Link Display | SKIPPED | 0.001 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.005 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |


DETAILED SECTION -- 23 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

As a user, I should be able to register successfully

| Scenarios | | Steps | |
|-----------|-------------------------------|-----------------------------|---|
| Total - 6 | | Total - 32 | |
| Pass - 0 | 6 | Pass - 0 | 32 |
| Fail - 6 | | Fail - 0 | 02 |
| Skip - 0 | | Skip - 32 | |
| | Total - 6 Pass - 0 Fail - 6 | Total - 6 Pass - 0 Fail - 6 | Total - 6 Pass - 0 Fail - 6 Total - 32 Pass - 0 Fail - 0 |

VerifyUserShouldNavigateToRegisterPageSuccessfully

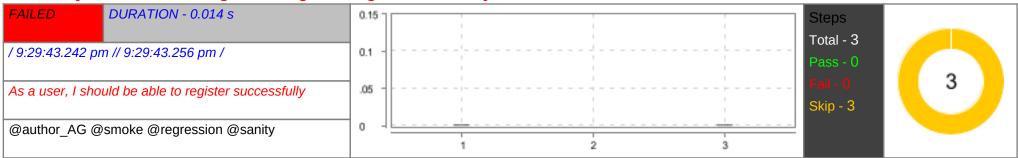

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.003 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 1 | Given I am on Home Page | SKIPPED | 0.001 s |
| 2 | When I click on Register Link | SKIPPED | 0.000 s |

DETAILED SECTION -- 25 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 3 | Then I can verify Register text | SKIPPED | 0.001 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.005 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |

DETAILED SECTION -- 26 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

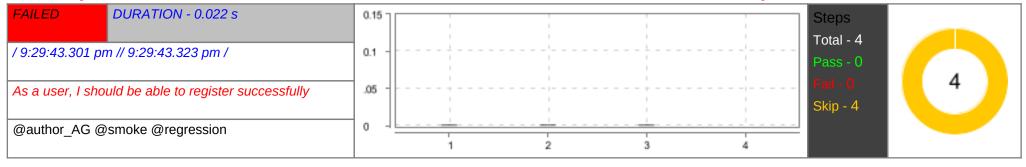

DETAILED SECTION -- 27 --

| Step / Hook Details | Status | Duration |
|--|--------|----------|
| BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.004 s |
| java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| at org.testng.internal.invokers.Testlnvoker.invokeTestMethods(Testlnvoker.java:200) | | |
| at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| at org.testng.TestRunner.run(TestRunner.java:621) | | |
| at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |

DETAILED SECTION -- 28 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 1 | | SKIPPED | 0.001 s |
| 1 | Given I am on Home Page | | - |
| 2 | When I click on Register Link | SKIPPED | 0.001 s |
| 3 | And Click on REGISTER button | SKIPPED | 0.001 s |
| 4 | Then Verify the error message " <errormessage>"</errormessage> | SKIPPED | 0.000 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.008 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |


| FAILED DURATION - 0.034 s | 0.15 Steps |
|--|-----------------|
| / 9:29:43.387 pm // 9:29:43.421 pm / | 0.1 - Total - 4 |
| / 9.29.43.307 μπ// 9.29.43.421 μπ/ | Pass - 0 |
| As a user, I should be able to register successfully | .05 |
| | Skip - 4 |
| @author_AG @smoke @regression | 0 1 2 2 |
| | 1 2 3 4 |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.014 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:848) at org.testng.TestRunner.run(TestRunner.java:621) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) at org.testng.TestNG.runSuites(TestNG.java:1114) at org.testng.TestNG.run(TestNG.java:1082) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 1 | Given I am on Home Page | SKIPPED | 0.001 s |
| 2 | When I click on Register Link | SKIPPED | 0.000 s |
| 3 | And Click on REGISTER button | SKIPPED | 0.000 s |
| 4 | Then Verify the error message " <errormessage>"</errormessage> | SKIPPED | 0.000 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | FAILED | 0.005 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

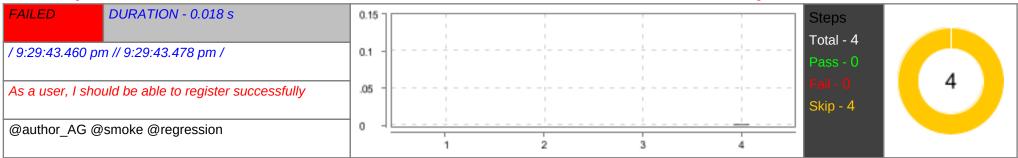

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.002 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| 1 | Given I am on Home Page | SKIPPED | 0.000 s |
| 2 | When I click on Register Link | SKIPPED | 0.000 s |
| 3 | And Click on REGISTER button | SKIPPED | 0.000 s |
| 4 | Then Verify the error message " <errormessage>"</errormessage> | SKIPPED | 0.001 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.007 s |
| | java.lang.NoClassDelFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java.77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java.77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java.77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java.489) at java.base/java.lang.reflect.Constructor.newInstance(DerfaultObjectFactory.java.480) at io.cucumber.core.backend.DefaultObjectFactory.gethnstance(DefaultObjectFactory.java.453) at io.cucumber.core.backend.DefaultObjectFactory.gethnstance(DefaultObjectFactory.java.45) at io.cucumber.givava.AbstractGlueDefinition.execute(JavaHookDefinition.java.47) at io.cucumber.givava.AbstractGlueDefinition.execute(JavaHookDefinition.java.46) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java.46) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode java:10) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.Reterrore.givar.giva | | |

DETAILED SECTION -- 36 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

| FAILED DURATION - 0.030 s | 15 Steps | |
|--|------------|---|
| /0.20.42 502 pgs //0.20.42 522 pgs / | Total - 4 | |
| / 9:29:43.502 pm // 9:29:43.532 pm / | Pass - 0 | |
| As a user, I should be able to register successfully | 5 Fail - 0 | 4 |
| The state of the s | Skip - 4 | |
| @author_AG @smoke @regression | | |
| | 1 2 3 4 | |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.016 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor4.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.testng.internal.invokers.MethodRunner.runlnSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethodS(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:348) at org.testng.TestRunner.privateRun(TestRunner.java:443) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestnG.runSuitesSequentially(TestNG.java:1280) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1200) at org.testng.TestNG.runSuitesCoally(TestNG.java:1114) at org.testng.TestNG.runSuitesCoally(TestNG.java:1114) at org.testng.TestNG.runSuitesCoally(TestNG.java:1082) at com.intellij.rt.testng.RemoteTestNG.run(IDEARemoteTestNG.java:105) Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance((NativeConstructorAccessorImpl.java:77) | | |
| 1 | Given I am on Home Page | SKIPPED | 0.000 s |
| 2 | When I click on Register Link | SKIPPED | 0.001 s |
| 3 | And Click on REGISTER button | SKIPPED | 0.000 s |
| 4 | Then Verify the error message " <errormessage>"</errormessage> | SKIPPED | 0.001 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks at jdk.internal.reflect.GeneratedConstructorAccessor4.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | FAILED | 0.004 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |

VerifyThatUserShouldCreateAccountSuccessfully

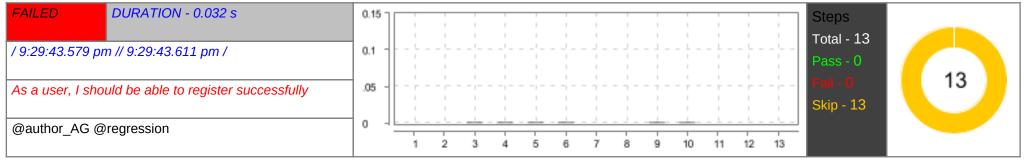

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - com.nopcommerce.demo.steps.Hooks.setUp() | FAILED | 0.004 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor4.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | $at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$ | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| 1 | Given I am on Home Page | SKIPPED | 0.000 s |
| 2 | When I click on Register Link | SKIPPED | 0.000 s |
| 3 | And Select gender "female" | SKIPPED | 0.001 s |
| 4 | And Enter firstname "kunjan" | SKIPPED | 0.001 s |
| 5 | And Enter lastname "Patel" | SKIPPED | 0.001 s |
| 6 | And Select day "01" | SKIPPED | 0.001 s |
| 7 | And Select month "January" | SKIPPED | 0.000 s |
| 8 | And Select year "1990" | SKIPPED | 0.000 s |
| 9 | And Enter email "kunjanpatel@gmail.com" | SKIPPED | 0.001 s |
| 10 | And Enter password "kunjan16" | SKIPPED | 0.001 s |
| 11 | And Enter Confirm Password "kunjan16" | SKIPPED | 0.000 s |
| 12 | And Click on REGISTER button | SKIPPED | 0.000 s |
| 13 | Then Verify message "Your registration completed" | SKIPPED | 0.000 s |
| | AFTER - com.nopcommerce.demo.steps.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.008 s |
| | java.lang.NoClassDefFoundError: Could not initialize class com.nopcommerce.demo.steps.Hooks at jdk.internal.reflect.GeneratedConstructorAccessor4.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.gacheNewInstance(DefaultObjectFactory.java:53) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:47) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMote.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.HookDefinitionMote.Jeva:48) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.secuteStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.secuteStep(TestStep.java:84) at io.cucumber.core.runner.Runner.IncetCase.java:90) at io.cucumber.core.runner.Runner.Runner.secutionContext.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberRunner.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(TestNGCucumberTests.java:35) at io.cucumber.testng.AbstractTestNGCucumberTest | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:957) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:848) | | |
| | at org.testng.TestRunner.run(TestRunner.java:621) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:336) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1200) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1114) | | |
| | at org.testng.TestNG.run(TestNG.java:1082) | | |
| | at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) | | |
| | at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) | | |
| | Caused by: java.lang.ExceptionInInitializerError: Exception java.lang.ExceptionInInitializerError [in thread "main"] | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) | | |
| | at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |

DETAILED SECTION -- 44 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |